



Outdoor
Living Today

ASSEMBLY MANUAL

8x8 Greenhouse

Stock Code:

GH88

Version #1.3

April 10, 2025



CONTACT

ADDRESS

9393 287th Street,
Maple Ridge, British Columbia,
Canada V2W 1L1

PHONE & FAX

Toll Free: 1-888-658-1658

Fax:

ONLINE

Email: olmsupport@outdoorlivingtoday.com

Web: www.outdoorlivingtoday.com

What You Need to Know

IMPORTANT INFORMATION

1. Proper Installation and Use

Our products are designed for use based on proper installation on level ground and normal residential use. To ensure optimal performance and longevity, please follow the instruction manual provided during the assembly process. Be sure to retain the manual for future maintenance purposes.

2. Site Preparation Responsibility

Customers are responsible for ensuring a solid, level, and well-draining site for construction. A stable foundation is essential for the structural integrity of the product.

3. Compliance with Local Regulations

Before ordering this product, please check with your local municipal or county authorities to confirm that it complies with building codes and regulations.

4. Snow Load Considerations

- Snow load ratings vary by geographical location. If heavy or wet snowfall occurs, it is advisable to promptly sweep snow off the roof to prevent excessive weight.
- For elevated structures, any structural and building code requirements are solely the customer's responsibility and should be strictly followed.

5. Wind Conditions and Secure Installation

- In areas with high or gusty wind conditions, it is crucial to install the structure securely to the ground.
- Regular maintenance is essential to ensure that screws, doors, windows, and other parts remain tightly affixed.

6. Liability and Customer Support

- Customers agree to hold Outdoor Living Today and any Authorized Dealers free of any liability for improper installation, maintenance, and repair.
- In the event of a missing or broken piece, contact the Outdoor Living Today Customer Support Line at 1-888-658-1658 within 30 days of delivery. Replacement parts will be couriered free of charge within 10 business days.
- All structures purchased from Outdoor Living Today are covered for one year against defects in manufacturing and workmanship. Costs incurred for customer installations are not included.

7. Warranty Considerations

- Failure to use the supplied parts included in this kit could result in poor product performance and may void your warranty.
- If you plan to deviate from our written instructions, please contact Outdoor Living Today's Customer Toll-Free Line for guidance.

What to do Before my Shed Arrives?



Become familiar with this assembly manual and determine if you can complete the project yourself or will require a professional contractor.



One helper is recommended to assist in constructing your shed. It generally takes two people two days to assemble a shed. If you're hiring a contractor, their rate should be in line with that duration of work.



Clear the construction area and ensure a clear pathway for delivery when the freight company arrives. Remove all debris: roots, grass, rocks, etc.



Excavate the site. Contact your local utilities company to ensure there are no gas or electric lines buried in the area before digging.



Decide on the type of foundation you will be using: Concrete slab, or 4-6 inches of crushed gravel with paver stones or 4x4 stringers.






























You can find the footprint for your shed on Page 3 of your Assembly Manual.



If doing the assembly yourself, have all the necessary tools ready to go and in working condition. A list of required tools can be found after the parts list.


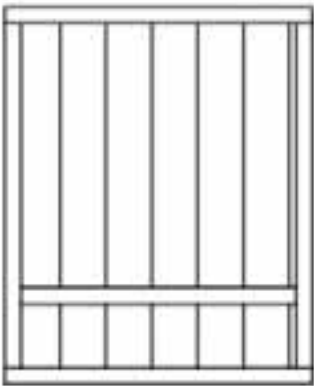
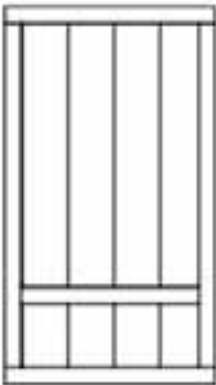
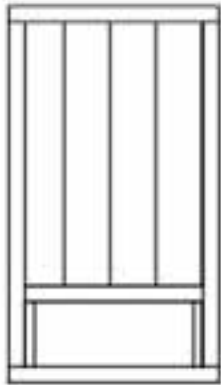
Thank you for purchasing our 8'x8' Greenhouse
Please take the time to identify all the parts prior to assembly.

ANGLED & PROFILED PARTS





PART DRAWING	CROSS SECTION	QUANTITY	LENGTH	PART NAME & DIMENSIONS
		4	87.25	Center Posts 3 1/2" x 3 1/2" x 87 1/4"
		6	76	Side Posts 3 1/2" x 3 1/2" x 76"
		4	76	L/R Corner Posts 3 1/2" x 3 1/2" x 76"
		6	54.375	Side Rafter 3 1/2" x 3 1/2" x 54 3/8"
		4	54.375	L/R Corner Rafter 3 1/2" x 3 1/2" x 54 3/8"
		3	38.5	Door Header 3 1/2" x 3 1/2" x 38 1/2"
		2	4.625	King Stud 3 1/2" x 3 1/2" x 4 5/8"
		2	9.625	Ridge Detail Plate 1/2" x 3 1/2" x 9 5/8"
		4	6.125	Side Detail Plate 1/2" x 4" x 6 1/8"
		8	19.5	Side Wall Trim 1 1/2" x 1 1/2" x 19 1/2"
		4	28.5	Corner Wall Trim 1 1/2" x 1 1/2" x 28 1/2"
		1	31.5	Rear Center Wall Trim 1 1/2" x 1 1/2" x 31 1/2"
		2	47.75	Ridge Board A 1" x 4 1/2" x 47 3/4"
		2	29.75	Ridge Board B 1" x 4 1/2" x 29 3/4"
		1	36	Ridge Board C 1" x 4 1/2" x 36"
		4	47.75	Side Facia 3/4" x 4 1/2" x 47 3/4"

Note: you may find the detailed drawings at the end of the manual.

PANELIZED PARTS

	PART DRAWING	QUANTITY	PART NAME	DIMENSIONS
		1	Rear Center Wall Panel	31 1/2" x 35"
		4	Corner Wall Panel	28 1/2" x 35"
		4	Side Wall Panel	19 1/2" x 35"
		4	Side Wall Panel With Vent	19 1/2" x 35"





PANELIZED PARTS

PART DRAWING	QUANTITY	PART NAME	DIMENSIONS
	1	Vent Window Panel	26 1/2" x 31"
	4	Potting Shelf	16" x 44 3/4"
	1	Dutch Door Top	30 3/4" x 50"
	1	Dutch Door Bottom	30 3/4" x 36 1/2"

PARTS CONTINUED

	QUANTITY	PART NAME	DIMENSIONS
	8	Foundation Posts	3 1/2" 3 1/2" x 47 3/4"
	8	Potting Shelf Legs	1 1/2" x 1 1/2" x 22 1/2"
	1	Vent Window Cleat	3/4" x 2 1/2" x 26 1/2"
	2	Metal Ridge Caps	60"



WINDOW PACKED PARTS

PART DRAWING	QUANTITY	PART NAME	DIMENSIONS
	1	Rear Center Poly	32" x 52 3/4"
	4	Corner Poly	29 1/2" x 53 3/8"
	8	Side Wall Poly	20" x 39 3/4"
	4	Gable Triangle Poly	12 13/16" x 5 3/16"









WINDOW PACKED PARTS

	PART DRAWING	QUANTITY	PART NAME	DIMENSIONS
		7	Roof Poly	20 1/2" x 54 1/2"
		1	Roof Short Poly	20 1/2" x 26 3/4"

HARDWARE KIT (PROVIDED)

7 1/4" Structural Screw  x 18	2 1/2" Brown Screw  x 218	1 1/4" Brown Screw  x 20
2" Black Headed Screw  x 24	3/4" Black Headed Screw  x 33	3/4" Silver Screw  x 6
1 1/2" Trim Nail  x 60	2" Metal Roof Screw  x 10	Square Drive Bit  x 1
Torx Drill Bit  x 1	1/4" Nut Driver  x 1	Heat Hinge  x 1
Door Handle  x 1	Drop Latch  x 1	Butt Hinge  x 4
Barrel Bolt  x 1	Silicone  x 2	

TOOLS REQUIRED (NOT PROVIDED)

Hammer 	Screw Gun/Drill 	Tape Measure 
Wood Clamp 	Utility Knife 	Level 
Pliers 	Ladder 	1/8" Drill Bit 

SAFETY EQUIPMENT REQUIRED (NOT PROVIDED)

Safety Glasses 	Work Gloves 
---	---


Helpful Tips for Assembly




Follow Symbols



Have Helper

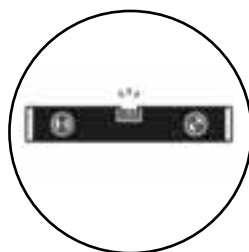

Build on Level
Foundation

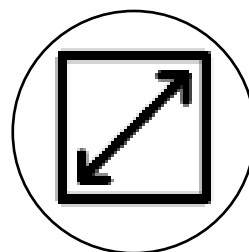

Check
Measurements
are Square

SYMBOLS

Throughout this assembly manual, symbols are provided at the top right-hand corner of the assembly step:



Use Help

Use help where this is shown. Two or more people are required to safely complete this step. To avoid injury or damage to the assembly, make sure to get some help.



Pre-Drill

Pre-drill a pilot hole before fastening screw or lag to prevent splitting of wood.



Use a Measuring Tape

Use a measuring tape to assure proper location.



Use a Clamp

Use a clamp to help fasten parts together.

Foundation

1. Site Selection:

- Begin by choosing an appropriate location for your greenhouse.
- Ensure the site is level and well-prepared.

2. Excavation and Base Preparation:

- Excavate an area measuring 9'x9' to a depth of 2-3 inches.
- Level the dirt base thoroughly.
- Lay approximately 2 inches of sand on the base, compacting it evenly.

3. Cedar Foundation Framing:

- Position the foundation framing on the level sand base.
- Securely attach the foundation posts together. Refer to Step 1 of manual for assembly.
- Verify that the footprint is square by measuring diagonally from corner to corner.

4. Optional Reinforcement:

- Optionally, secure the foundation posts to the ground using tie-down kits or by drilling and hammering 12-inch-long rebar pieces through the posts into the ground.

5. Landscape Cloth Installation:

- Lay landscape cloth over the entire area, cutting off any excess fabric around the edges.
- Ensure that the ground cover (weed barrier) used is specifically designed for landscaping, allowing water drainage while preventing weed growth.

6. Gravel Placement:

- Pack approximately 4 inches of small gravel on top of the landscape cloth to complete the foundation and floor.

Remember to follow these steps diligently to create a stable and cost-effective foundation for your greenhouse. Happy building!


Excavation




3/4 Cubic Yard Sand




Foundation Framing

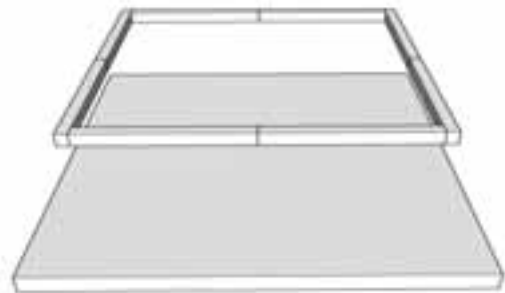




Landscape Cloth

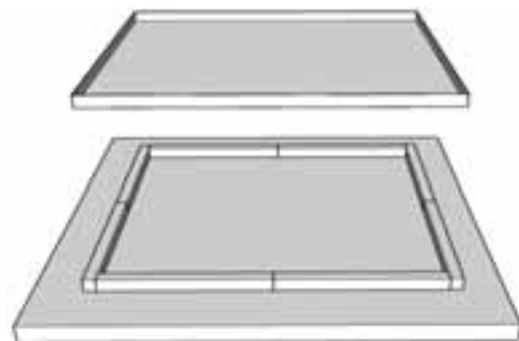

Gravel

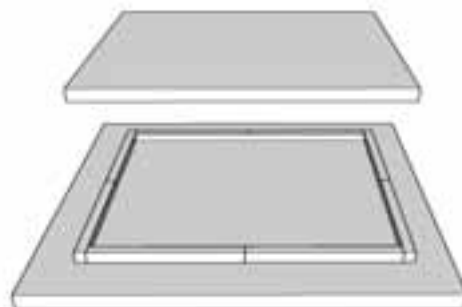

1. Floor Section

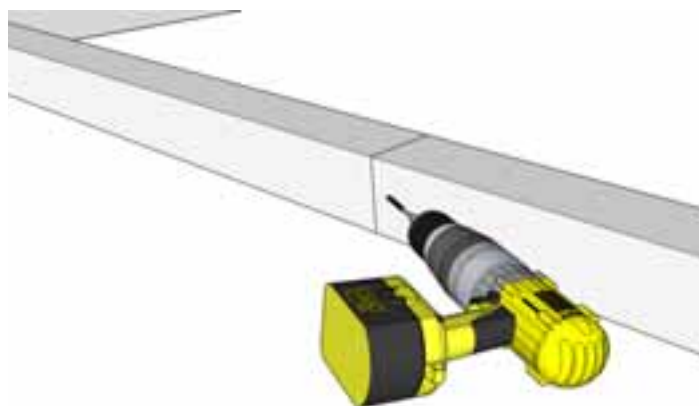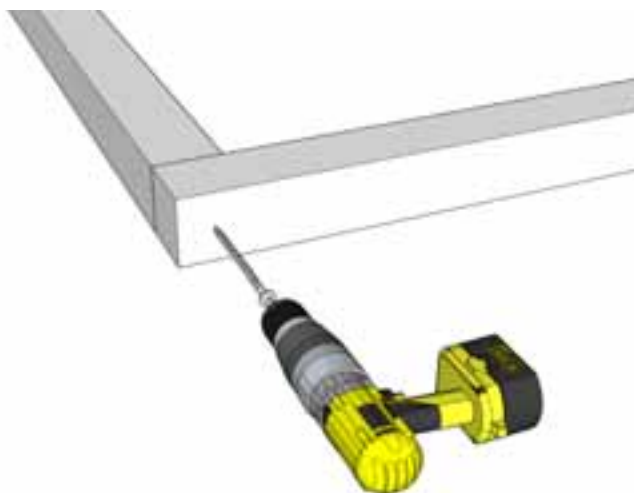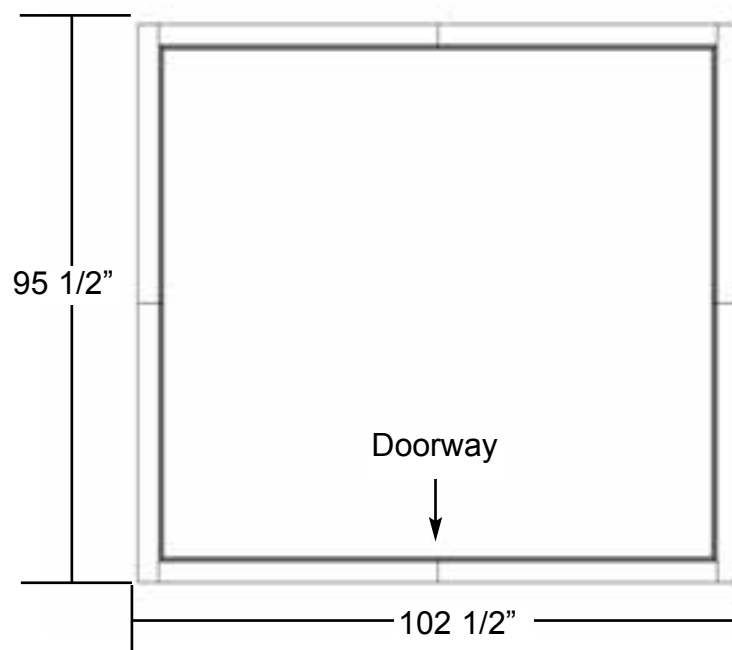

1. Lay out foundation posts on level ground. While ensuring foundation posts are square, screw posts together with 1 - 7 1/4" Structural Screw per corner and 1 - 2 1/2" Brown Screw at an angle where posts connect at the middle.




Pieces:

- 8x Foundation Posts
(3 1/2" x 3 1/2" x 47 3/4")

Hardware:

- 4x 7 1/4" Structural Screws
- 4x 2 1/2" Brown Screws

2. Wall Section

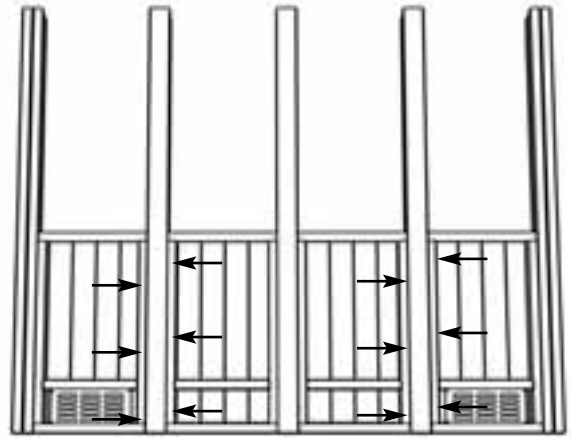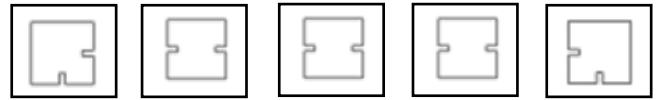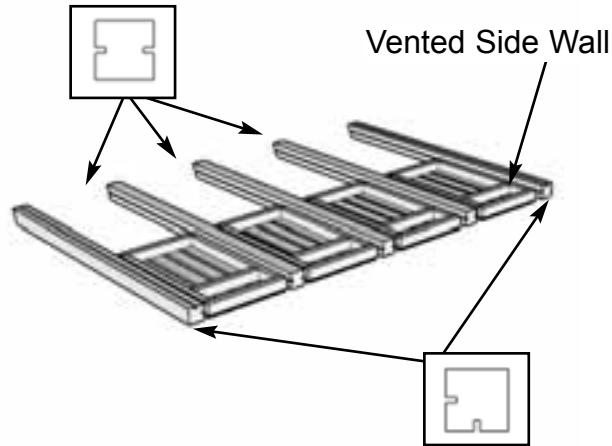



2. Lay out corner/side posts and side walls on a flat surface. Siding on outside of wall panels should be flush with outside of posts to create a neat and uniform appearance. Clamp wall panels to post and fasten with 3 - 2 1/2" Brown Screws to post ensuring siding stays flush with posts on the exterior.

Pieces (Steps 2- 3):


- 4x Corner Posts
(3 1/2" x 3 1/2" x 76")
- 6x Side Posts
(3 1/2" x 3 1/2" x 76")
- 6x Side Walls
(19 1/2" x 35")
- 4x Vented Side Walls
(19 1/2" x 35")

Hardware (Steps 2- 3):

- 48x 2 1/2" Brown Screws

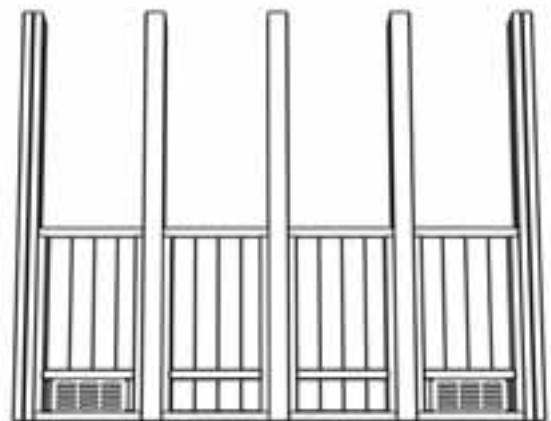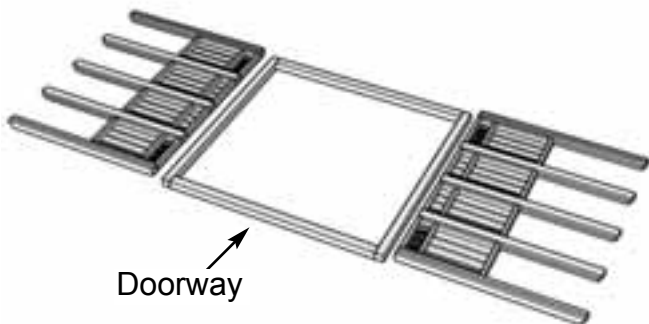

3. Repeat step 2 on the opposite side of the foundation to have 2 completed side wall sections.

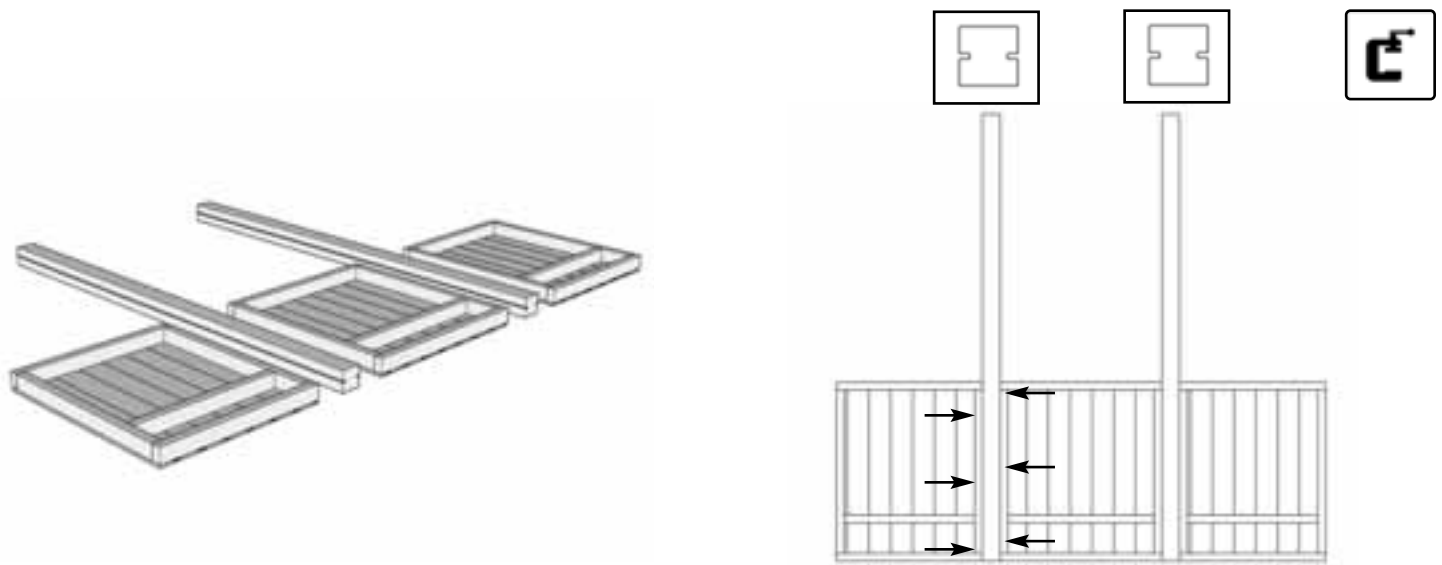


4. Assemble rear wall section. Lay out Center Posts, Corner Walls, and Rear Center Wall. Ensure wall siding is flush with the outside of the post. Clamp walls to post and fasten together with 3 - 2 1/2" Brown Screws through each wall into post.

Pieces:

- 2x Center Posts
(3 1/2" x 3 1/2" x 87 1/4")
- 2x Corner Walls
(28 1/2" x 35")
- 1x Rear Center Wall
(31 1/2" x 35")

Hardware:


- 12 x 2 1/2" Brown Screws

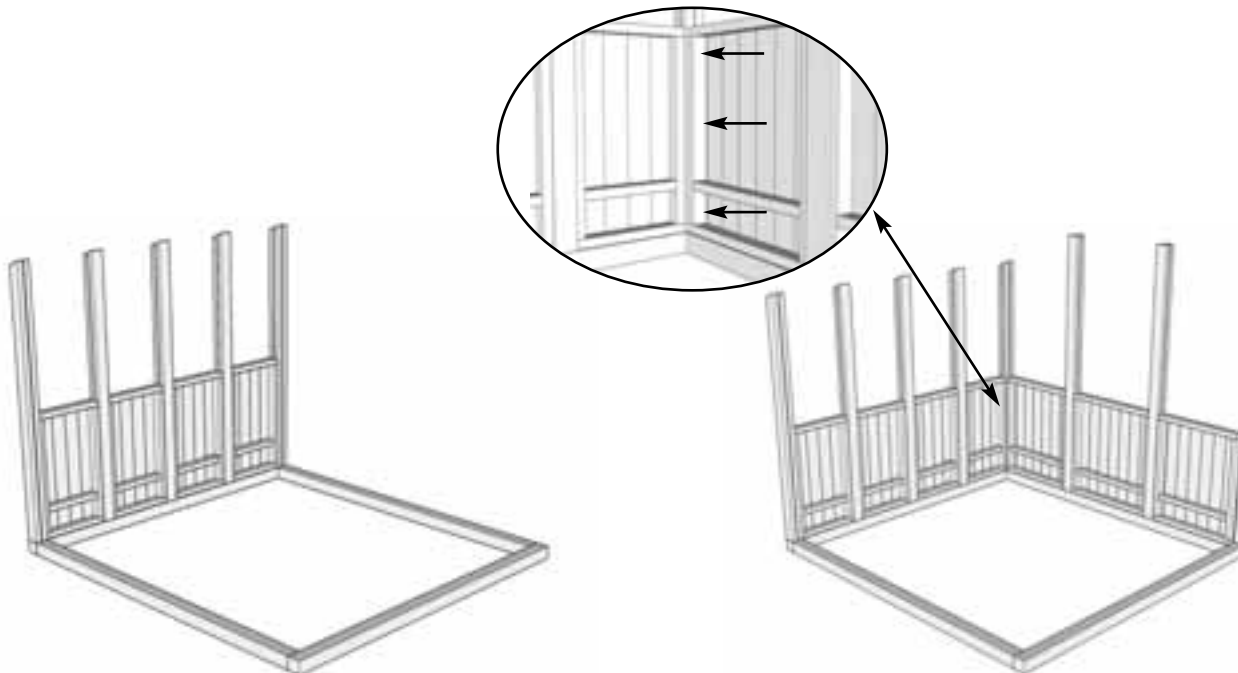

5. With a helper, carefully lift one of the side wall sections onto foundation posts. Lift and position rear wall section onto foundation posts as well and screw through Corner Wall into Corner post with 3 - 2 1/2" Brown Screws.

Hardware:



- 3 x 2 1/2" Brown Screws

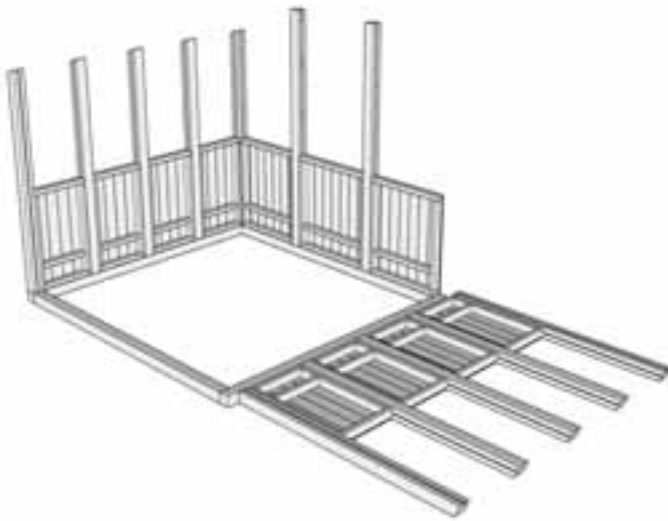

6. Repeat Step 5 with a helper and lift the opposite side wall section onto the foundation posts. Fasten corners by screwing 3 - 2 1/2" Brown Screws into the corner post.

Hardware:

- 3x 2 1/2" Brown Screws

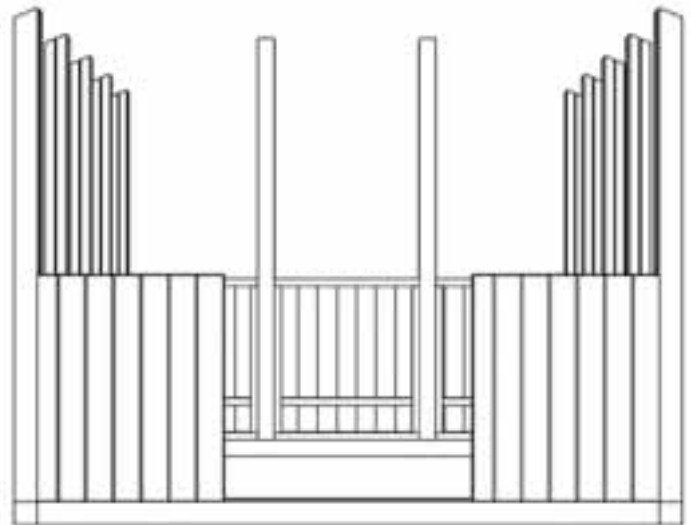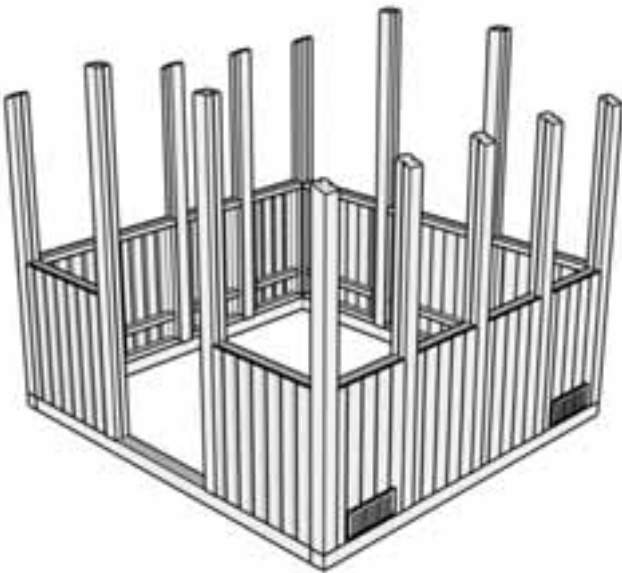



7. Locate two Corner Walls and position alongside corner posts. Fasten Corner Walls to Corner Posts with 3 - 2 1/2" Brown Screws per Corner Wall. Ensure siding on Corner Wall is flush with outside of Corner Post.

Pieces:

- 2x Corner Walls
(28 1/2" x 35")

Hardware:

- 6 x 2 1/2" Brown Screws

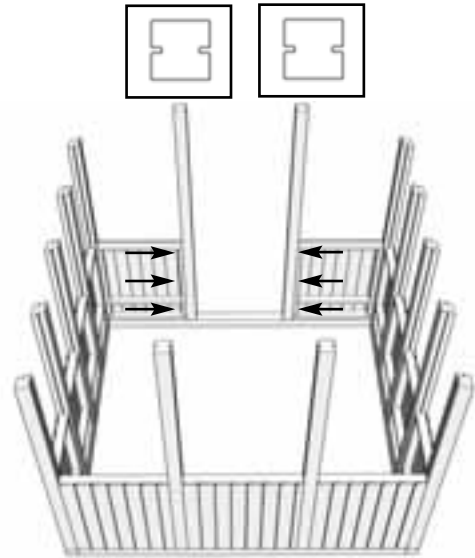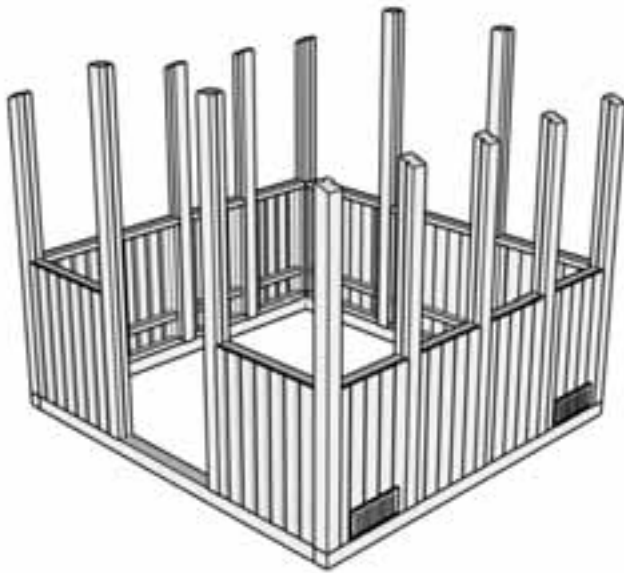


8. Position remaining two Center Posts alongside Corner Walls to create the Doorway. Fasten Corner Walls to Center Posts with 3 - 2 1/2" Brown Screws each.

Pieces:



- 2x Center Posts
(28 1/2" x 35")

Hardware:

- 6 x 2 1/2" Brown Screws

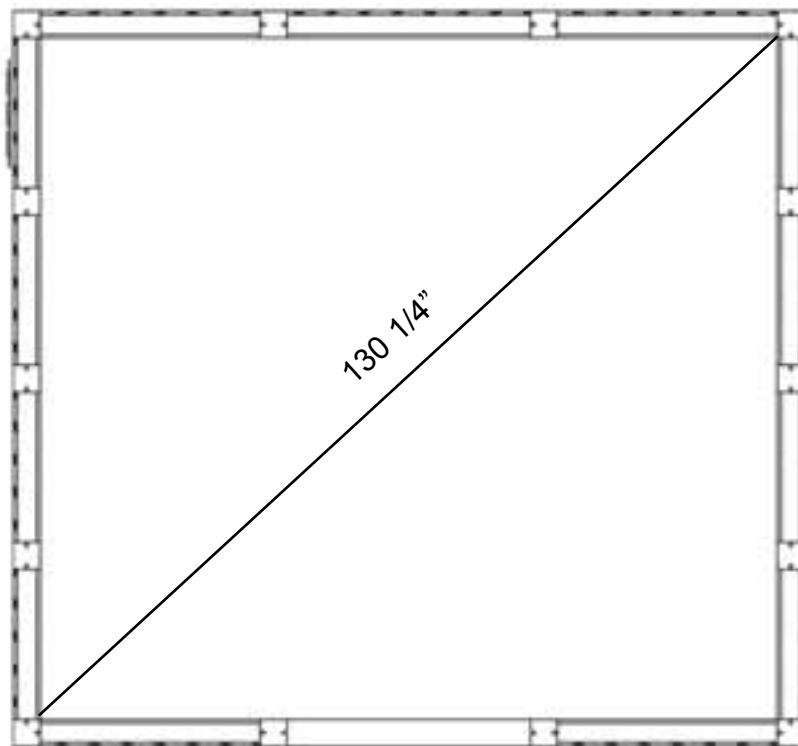


9. Take a moment and check if the structure is square. Measure from Corner Post to Corner Post on the diagonal. Both measurements should be within 1/4" of each other. If measurements don't match, adjust walls until square. Diagonal measurement should be approximately 130 1/4". While continuing to build, periodically check that your walls are staying square.

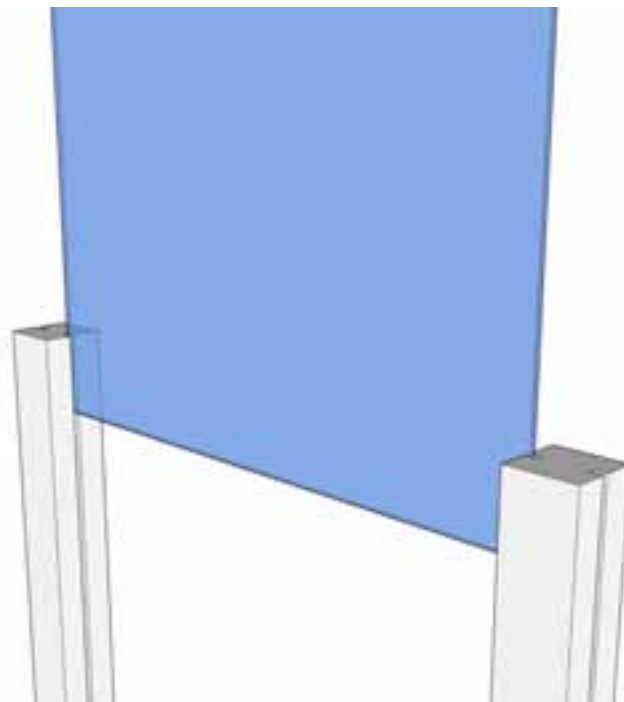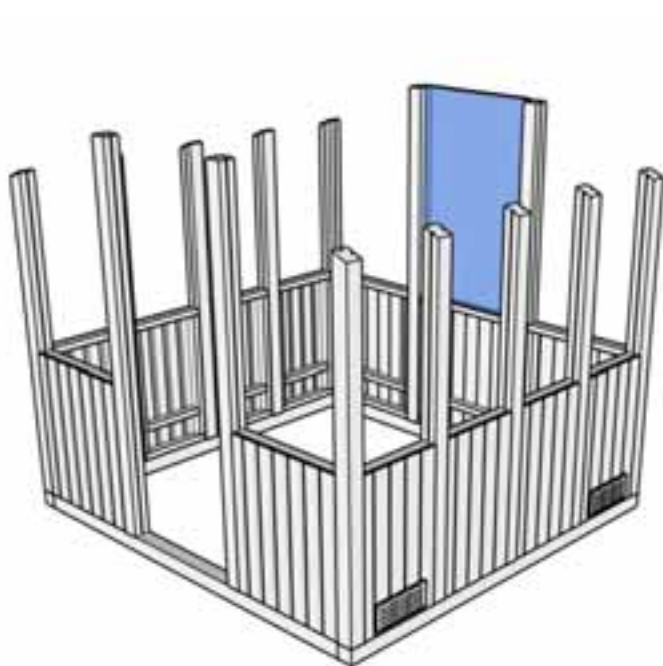

10. Locate Rear Center Poly Panel and slide in between rear Center Posts.

Pieces:

- 1x Rear Center Poly
(1/4" x 32" x 52 3/4")

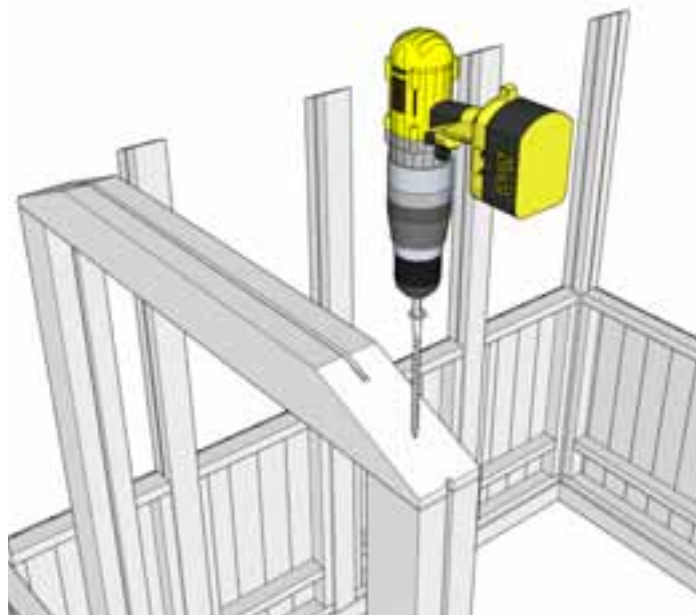



11. Position Door Header on both the Front and Rear Center Posts. Using 1 - 7 1/4" Structural Screw per end, fasten Door Header to Center Posts. Ensure Rear Center Poly Panel is installed before fastening Door Headers.

Pieces:

- 2x Door Header
(3 1/2" x 3 1/2" x 38 1/2")

Hardware:

- 4x 7 1/4" Structural Screws

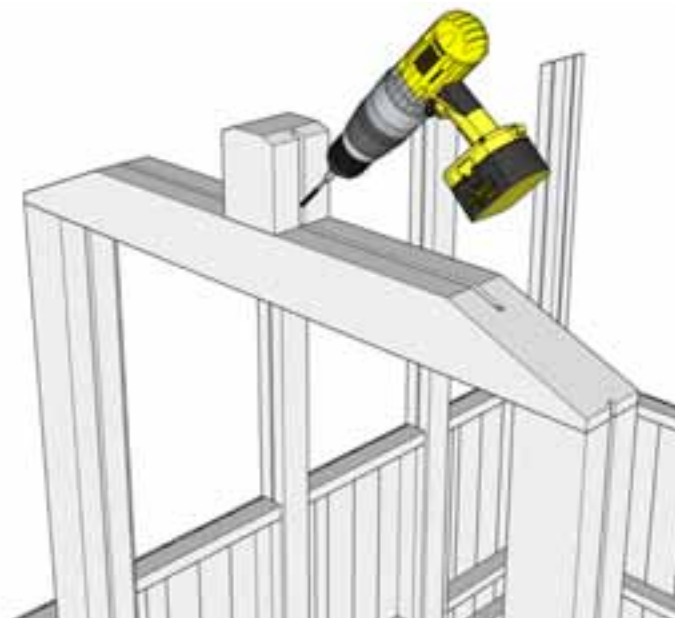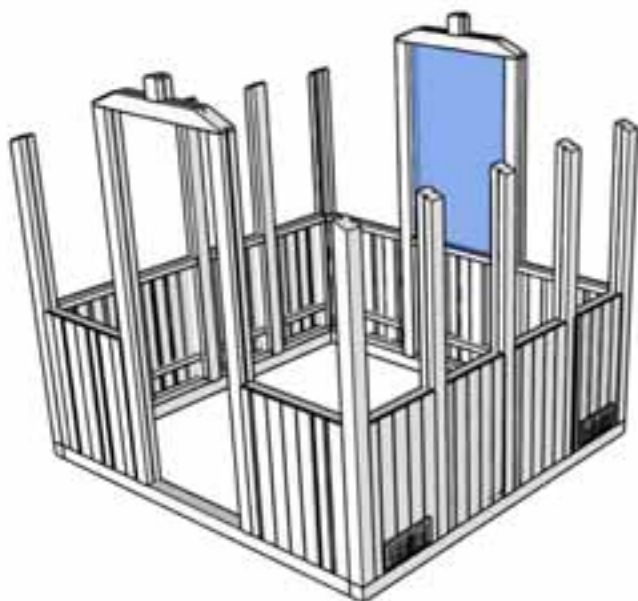



12. Locate King Studs. Center King Stud on Door Header, making sure the dado in the lumber is lined up. These need to be lined up so the windows can easily be dropped in. When positioned correctly, fasten King Stud to Door Header with 2 - 2 1/2" Brown Screws each at a slight angle.

Pieces:

- 2x King Stud
(3 1/2" x 3 1/2" x 4 5/8")

Hardware:

- 4x 2 1/2" Brown Screws

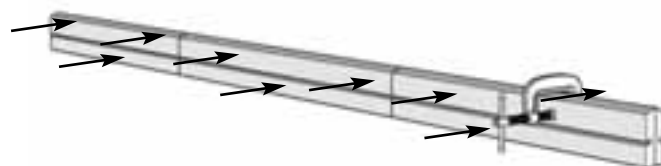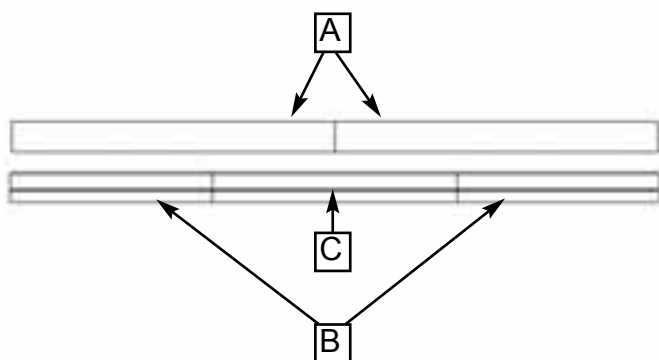


13. Lay out Ridge Board pieces on a flat and level surface. If you have a clamp available, use to hold the Ridge Boards tight together. Fasten both halves of Ridge Board together with 9 - 1 1/4" Brown Screws per side.

Pieces:

- 2x Ridge Board A
(1" x 4 1/2" x 47 3/4")
- 2x Ridge Board B
(1" x 4 1/2" x 29 3/4")
- 1x Ridge Board C
(1" x 4 1/2" x 36")

Hardware:



- 18x 1 1/4" Brown Screws

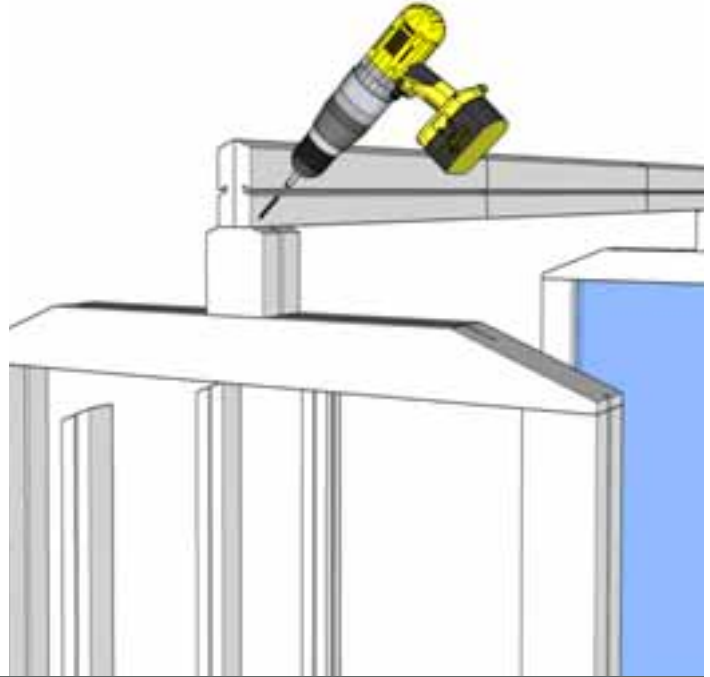

14. Position assembled Ridge Board on top of King Stud. Fasten Ridge Board to King Stud with 2 - 2 1/2" Brown Screws per side.

Hardware:


- 4x 2 1/2" Brown Screws

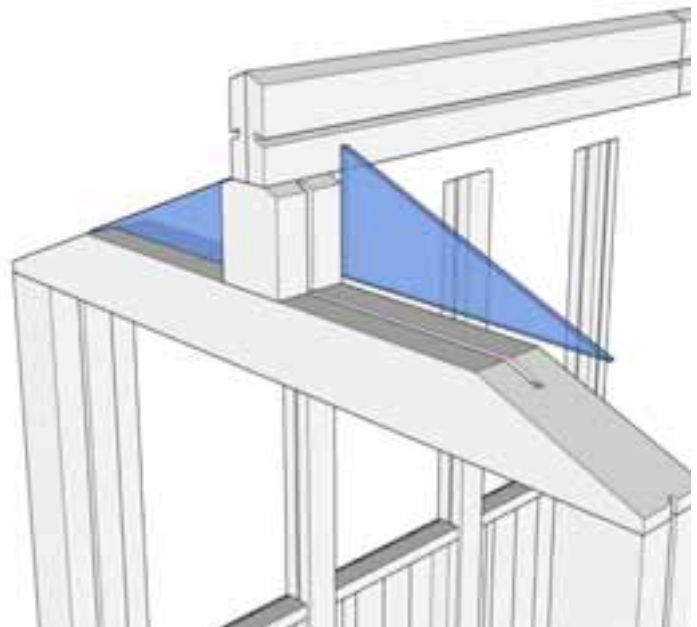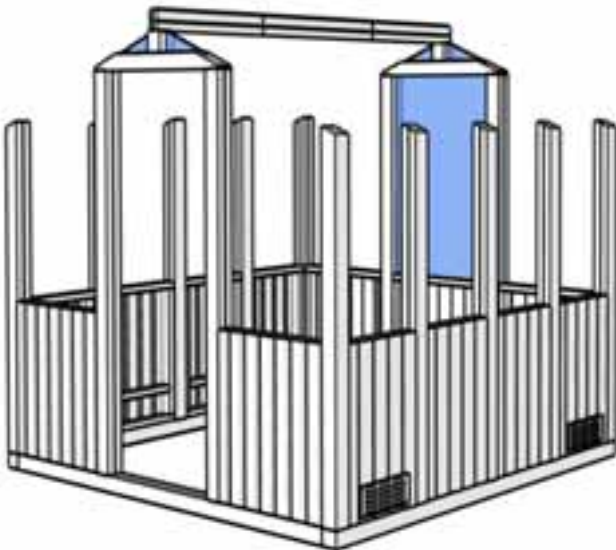

15. Locate Gable Triangle Poly pieces. Slide Poly pieces into the dado of the King Stud and Door Header. Complete for both sides.

Pieces:


- 4x Gable Triangle Poly
(1/4" x 12 13/16" x 5 3/16")

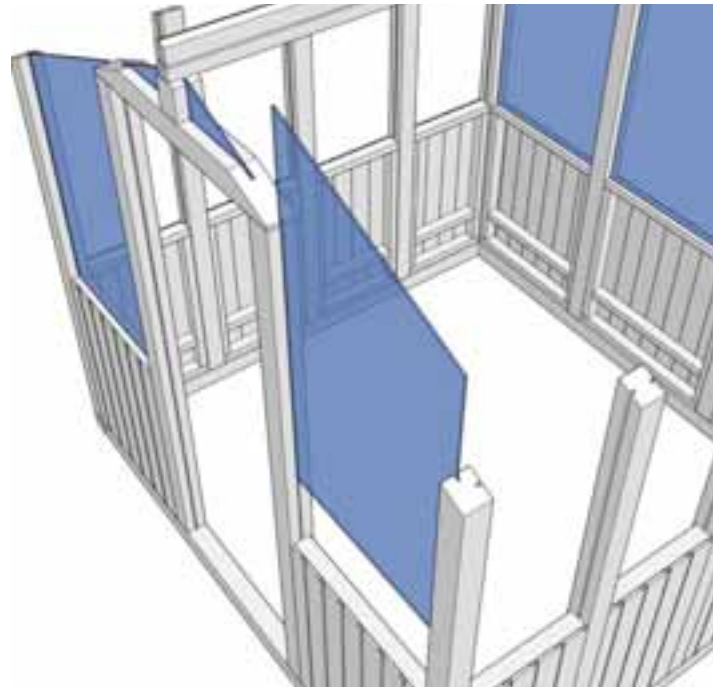

16. Locate Corner Poly pieces. Slide pieces into dado between Corner Posts and Center Posts. Complete for all four corners.

Pieces:


- 4x Corner Poly
(1/4" x 29 1/2" x 53 3/8")

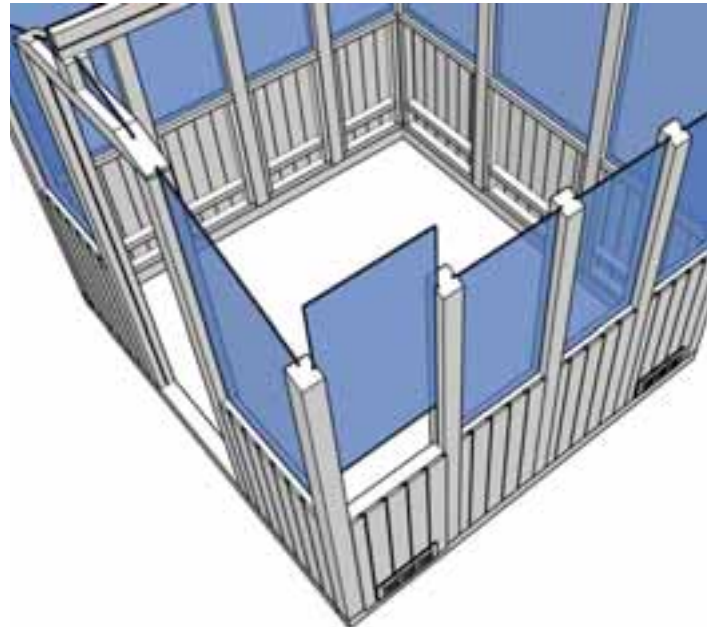

17. Locate Side Poly pieces. Slide pieces into dado between Corner Posts and Side Posts. Complete each side.

Pieces:

- 8x Side Poly
(1/4" x 20 1/2" x 39 3/4")

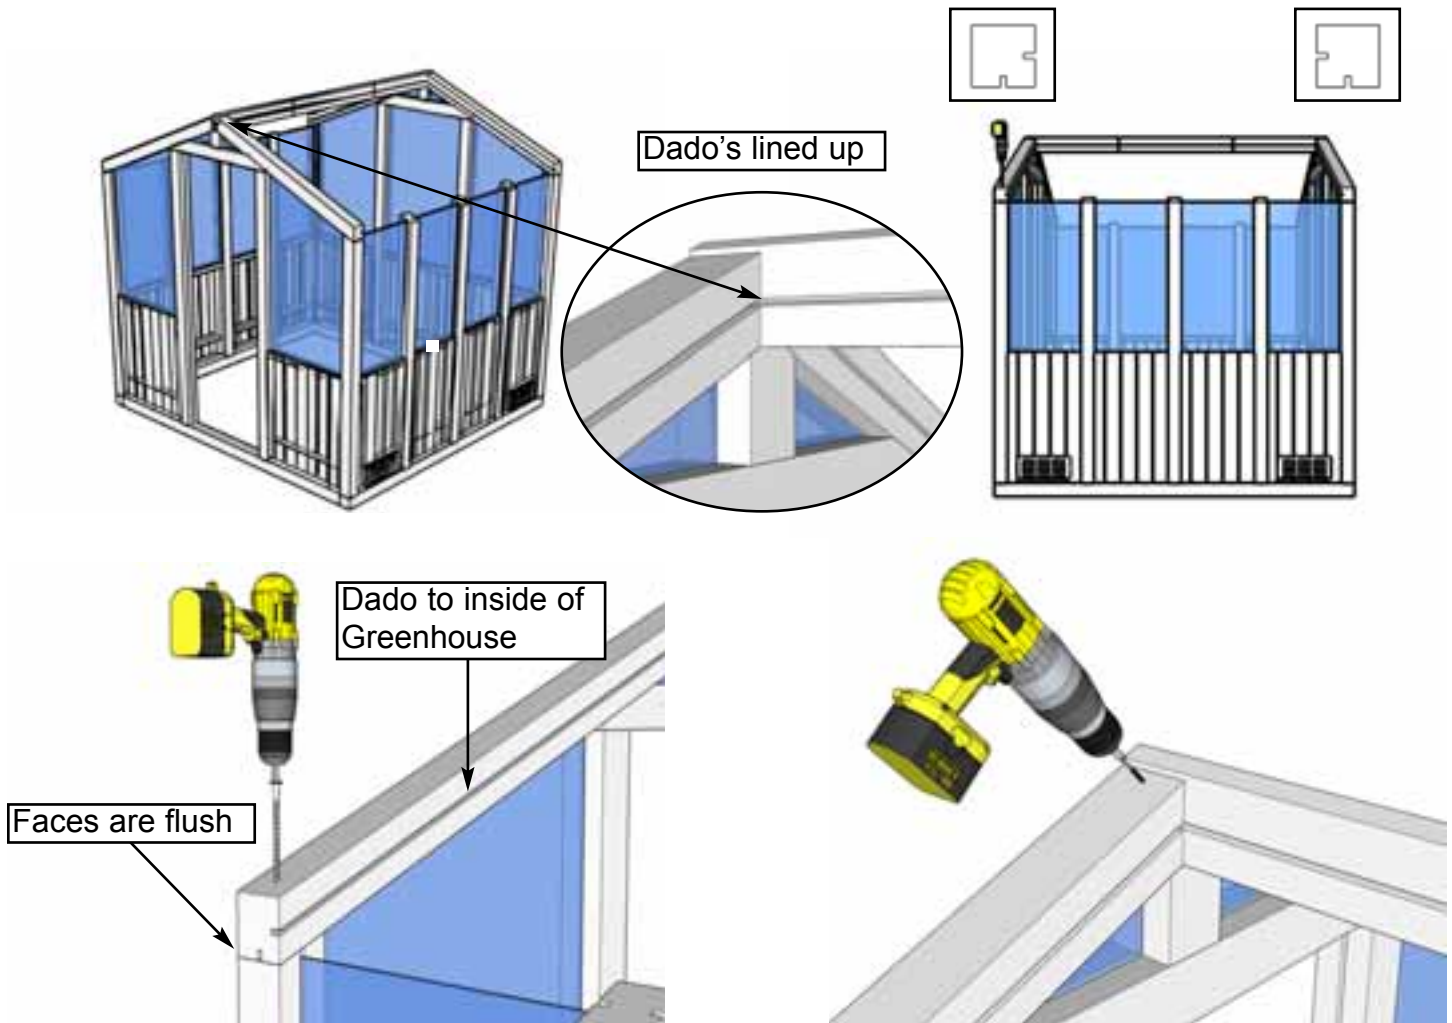


18. Locate Corner Rafters. With a helper, position Corner Rafter on top of Corner Post on one end, and flush with Ridge Board on opposite end. Ensure Dado's are facing towards the inside of the greenhouse. Dado on bottom of Rafter will fit over Corner Poly. At the peak, dado on Rafter should line up with Dado on Ridge Board. First fasten Rafter to Corner post while your helper holds it up with 1 - 7 1/4" Structural Screw. Switch positions and have your helper fasten the Rafter to the Ridge Board with 1 - 2 1/2" Brown Screw into the Ridge Board. Complete each corner of the Greenhouse.

Pieces:

- 4x Corner Rafters
(3 1/2" x 3 1/2" x 54 3/8")

Hardware:

- 4x 7 1/4" Structural Screws
- 4x 2 1/2" Brown Screws

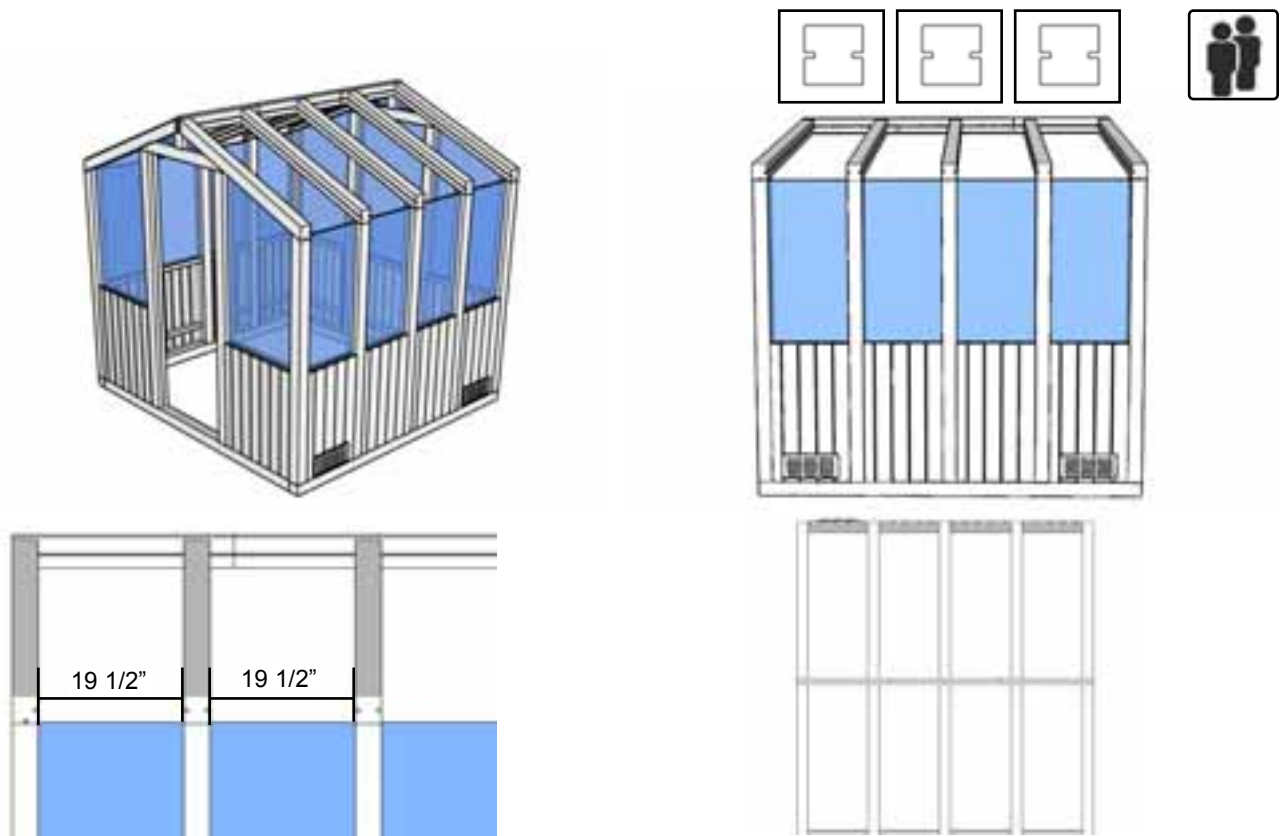


19. Locate Side Rafters. Position Rafters as per Step 18 and fasten with 1 - 7 1/4" Structural Screw into Side Post and 1 - 2 1/2" Brown Screw into Ridge Board. Have your helper push side walls in together to keep footprint square. Rafters should be spaced 19 1/2" apart by lining up with Side Posts. It can be helpful to mark out rafter position on Ridge Board with a pencil before fastening to maintain the 19 1/2" spacing.

Pieces:

- 6x Side Rafters
(3 1/2" x 3 1/2" x 54 3/8")

Hardware:

- 6x 7 1/4" Structural Screws
- 6x 2 1/2" Brown Screws

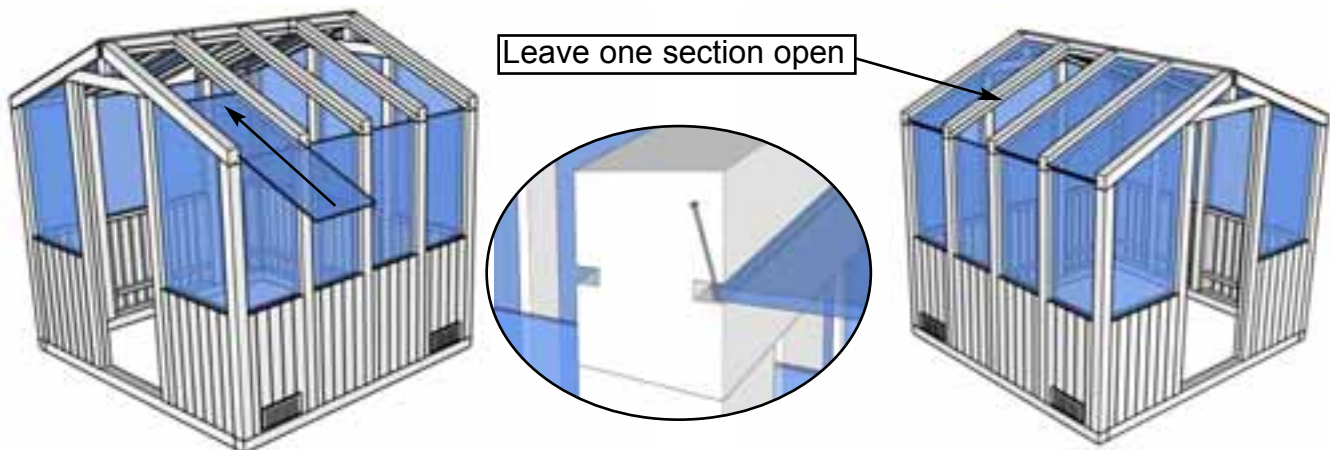


20. Locate Roof Poly. Slide Roof Poly up into roof section between rafters. Temporarily tack 1 - 1 1/2" Trim Nail into dado in the end of the rafter to hold the poly in place. Leave one section open without poly on the roof. This is where the vent window will be installed to vent hot air when needed.

Pieces:

- 7x Roof Poly
(1/4" x 20 1/2" x 54 1/2")

Hardware:

- 7x 1 1/2" Trim Nails

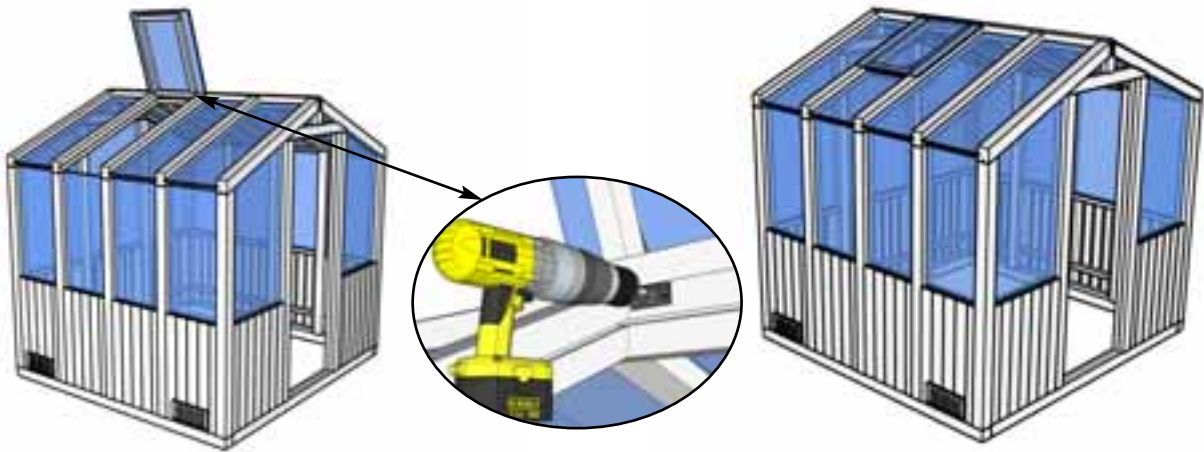



21. Locate Vent Window. Vent Window has pre installed hinges. Position window over open rafter section left in the previous step. Poly on window will overhang the rafters. Leave 1/4" on either side of window framing. Have one person hold the window open while the second screws the hinges into the Ridge Board.

Pieces:

- 2x Vent Window
(1/4" x 26 1/2" x 31")

Hardware:

- 6x 3/4" Black Headed Screws

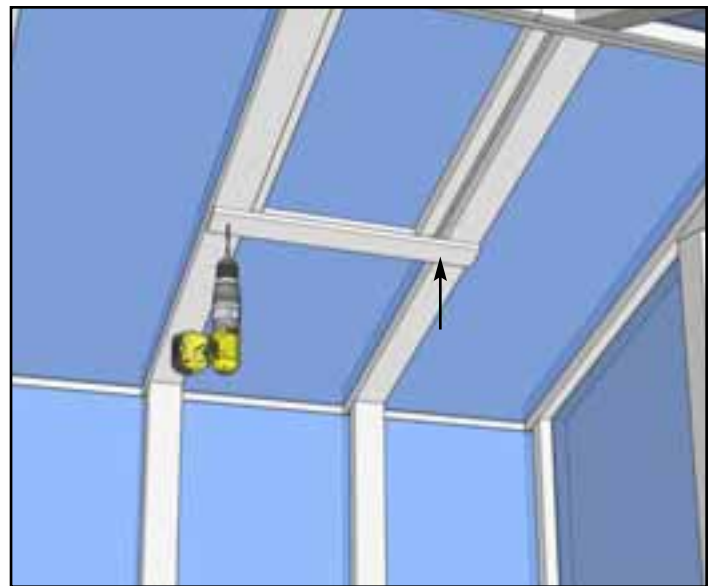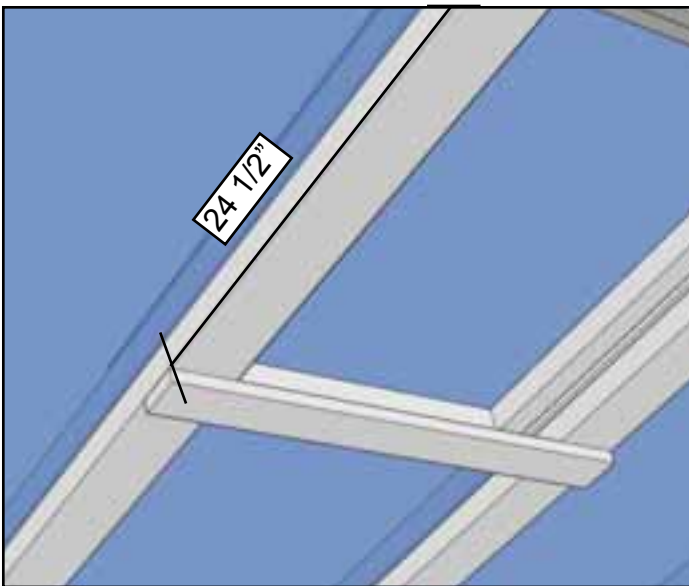


22. Position Vent Window Cleat on underside of Rafters below the Vent Window. The Cleat should be approximately 24 1/2" from the Ridge Board. Fasten Cleat to Rafters with 1 - 2 1/2" Brown Screw on each end.

Pieces:

- 1x Vent Window Cleat
(3/4" x 2 1/2" x 26 1/2")

Hardware:


- 2x 2 1/2" Brown Screws

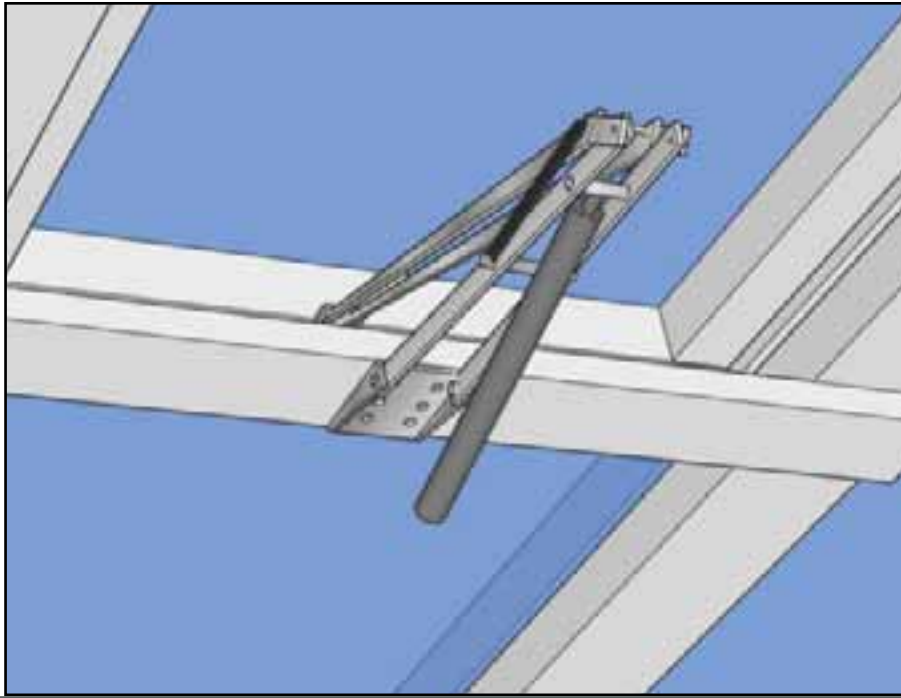

23. Locate and open the included Heat Hinge. Follow the instructions inside the Heat Hinge Box to fasten Hinge to the Vent Window Cleat and the Framing on the bottom of the window.

Pieces:
- 1x Heat Hinge



Hardware:
- Included in Heat Hinge Box

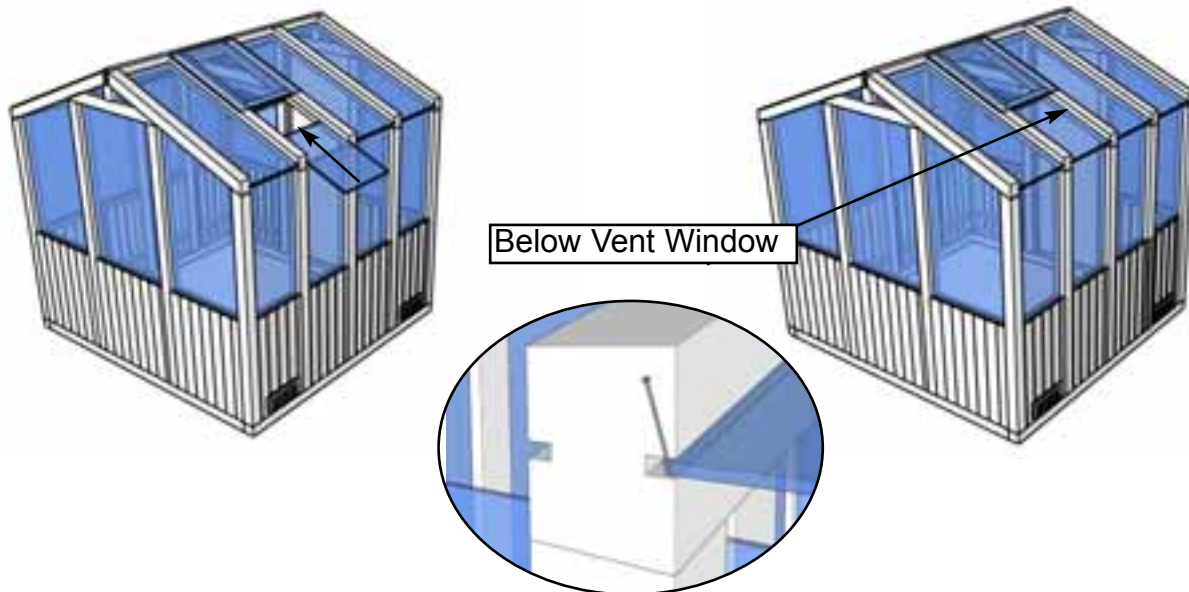

24. Locate Roof Short Poly. Slide Roof Short Poly up into roof section between rafters and below Vent Window. Temporarily tack 1 - 1 1/2" Trim nail into dado in the end of the rafter to hold the poly in place as per Step 20.

Pieces:
- 1x Roof Short Poly
(1/4" x 20 1/2" x 26 3/4")

Hardware:
- 1x 1 1/2" Trim Nails

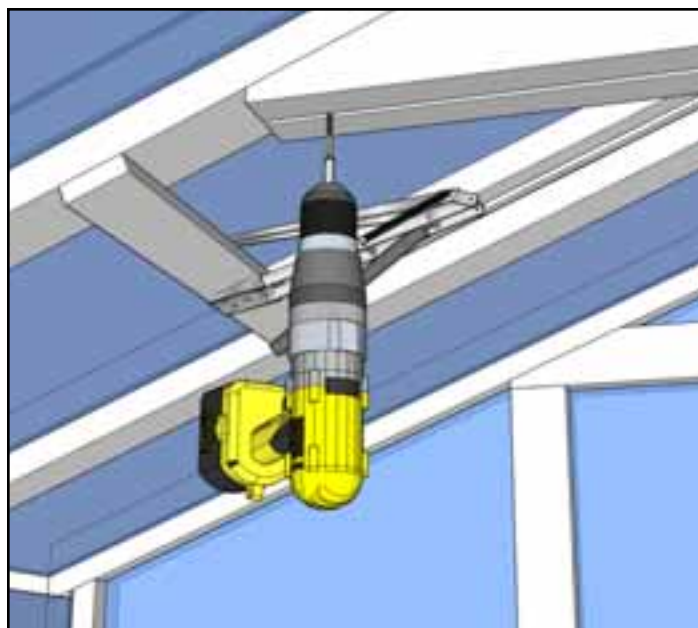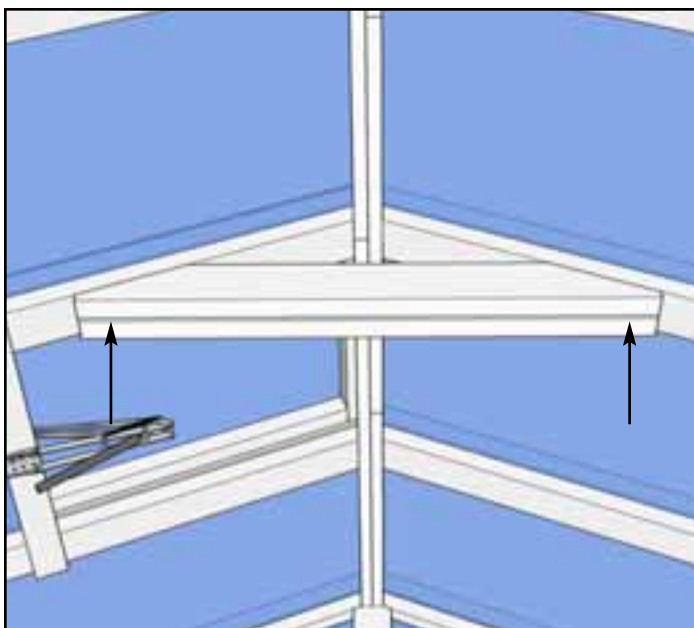

25. Locate remaining Door Header. This will be installed as a gusset underneath the Center Rafters. Hold the Gusset up against the underside of the rafters, above the Vent Window Cleat and fasten to Rafters with 2 - 2 1/2" Brown Screws per end.

Pieces:

- 1x Door Header
(3 1/2" x 3 1/2" x 38 1/2")

Hardware:


- 4x 2 1/2" Brown Screws



26. Once again check diagonal measurements in your greenhouse to make sure it is square as per Step 9. With the walls positioned correctly, screw each wall down into the foundation post with 3 - 2 1/2" Brown Screws per wall. Ensure walls are flush with Posts when tying walls down.

Hardware:

- 39x 2 1/2" Brown Screws

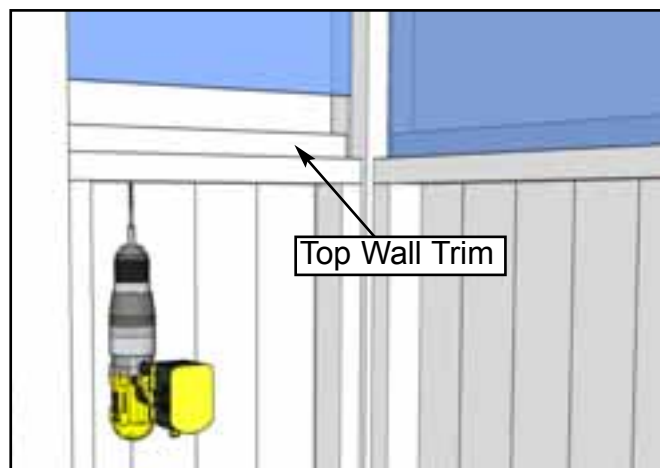



27. Locate Wall Trims. Position Wall Trims over top of wall panels. Fasten Wall Trims to walls from the inside of the greenhouse by screwing up through the top framing of the wall panels with 2 - 2 1/2" Brown Screws each. You can slide the Side Wall Trim up if needed.

Pieces:

- 8x Side Wall Trim
(1 1/2" x 1 1/2" x 19 1/2")
- 4x Corner Wall Trim
(1 1/2" x 1 1/2" x 28 1/2")
- 1x Rear Center Wall Trim
(1 1/2" x 1 1/2" x 31 1/2")

Hardware:

- 26x 2 1/2" Brown Screws

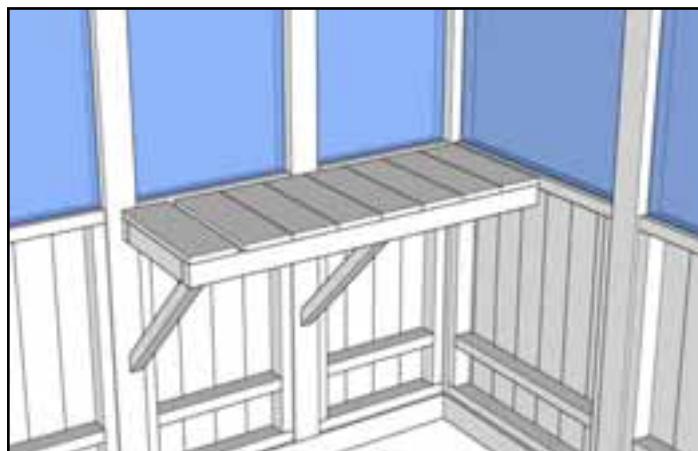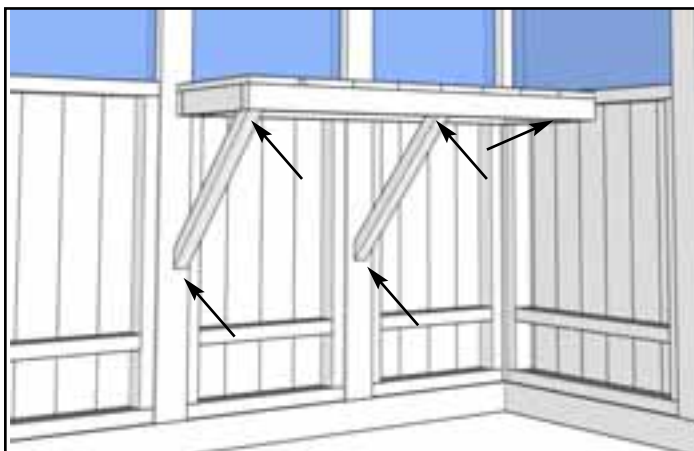


28. Locate Potting Shelves & Potting Shelf Legs. Position Shelf tight to rear corner of greenhouse. Top of shelves should be positioned along side top of walls but may be positioned lower if you wish. Place the Shelf Legs underneath the shelf so the bottom is flush with the 2x3 shelf framing and the 4x4 posts. Fasten at the top and bottom of the Shelf Leg with 1 - 2 1/2" Brown Screw per end. Fasten shelf to rear wall through framing with 1 - 2 1/2" Brown Screw.

Pieces:

- 1x Potting Shelf
(16" x 44 3/4")
- 2x Potting Shelf Leg
(1 1/2" x 1 1/2" x 22 1/2")

Hardware:

- 5x 2 1/2" Brown Screws

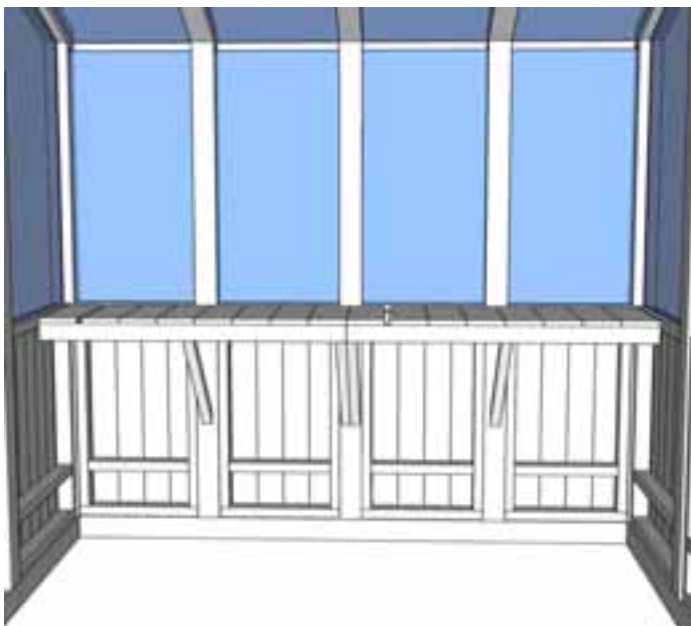


29. Repeat Step 28 to install remaining 3 Potting Shelves along sides of Greenhouse.

Pieces:

- 3x Potting Shelf
(16" x 44 3/4")
- 6x Potting Shelf Leg
(1 1/2" x 1 1/2' x 22 1/2")

Hardware:

- 15x 2 1/2" Brown Screws

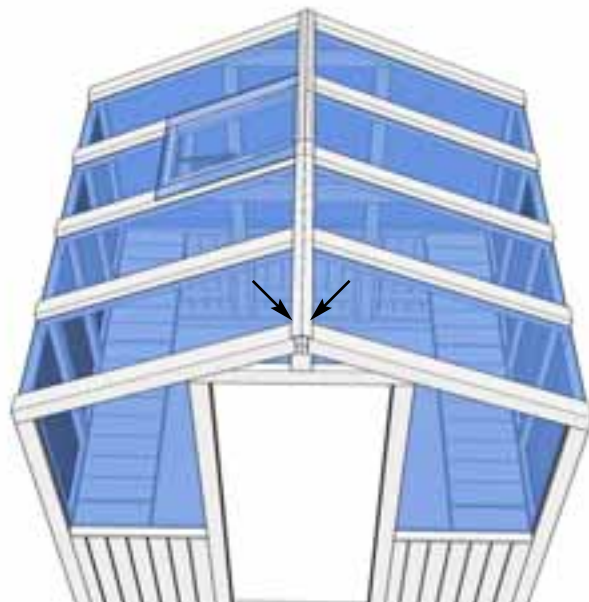

30. Locate Metal Ridge Caps. Place both Metal Ridge Caps on top of Greenhouse Ridge Board. Ridge Caps will over lap in the center. Fasten Ridge Cap to Rafters with 1 - 2" Metal Roof Screw per Rafter. Do not overtighten.

Pieces:

- 2x Metal Ridge Cap
(60" long)

Hardware:

- 10x 2" Metal Roof Screws
- 1x 1/4" Nut Driver




31. Locate Side Facia. Position Side Facia over the ends of the rafters. Fasten Side Facia to Rafter ends with 6 - 1 1/2" Trim Nails per piece.

Pieces:

- 4x Side Facia
(3/4" x 4 1/2" x 47 3/4")

Hardware:

-24x 1 1/2" Trim Nails

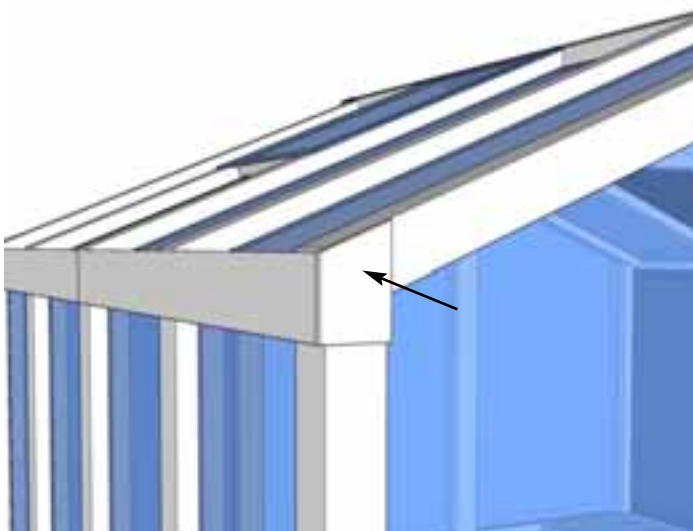



32. Locate Detail Plates. Position Side Detail Plate on Corner Post capping both the Post and the Side Facia. Attach plate with 4 - 1 1/2" Trim Nails. Position Ridge Detail Plate over top of King Stud, underneath the Metal Ridge Cap. Attach with 4 - 1 1/2" Trim Nails.

Pieces:

- 4x Side Detail Plate
(1/2" x 4" x 6 1/8")
- 2x Ridge Detail Plate
(1/2" x 3 1/2" x 9 5/8")

Hardware:

- 24x 1 1/2" Trim Nails

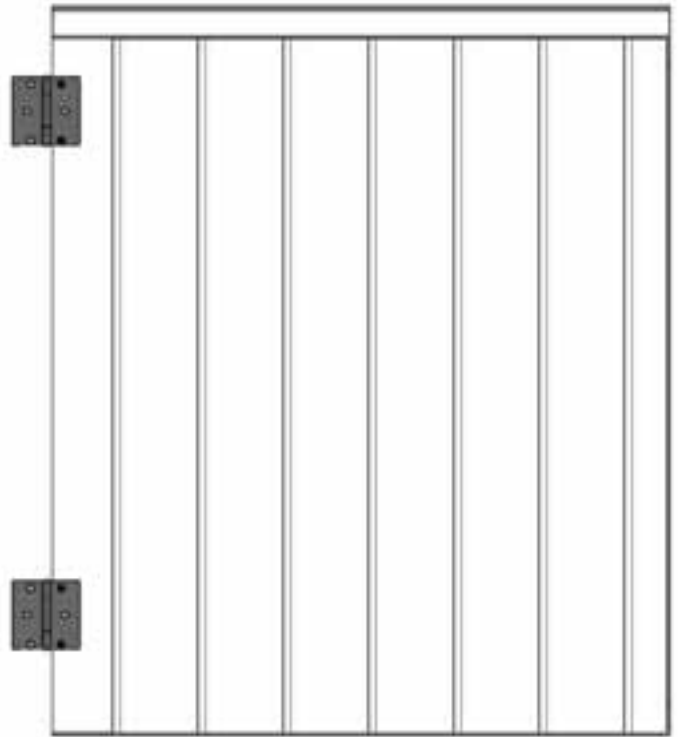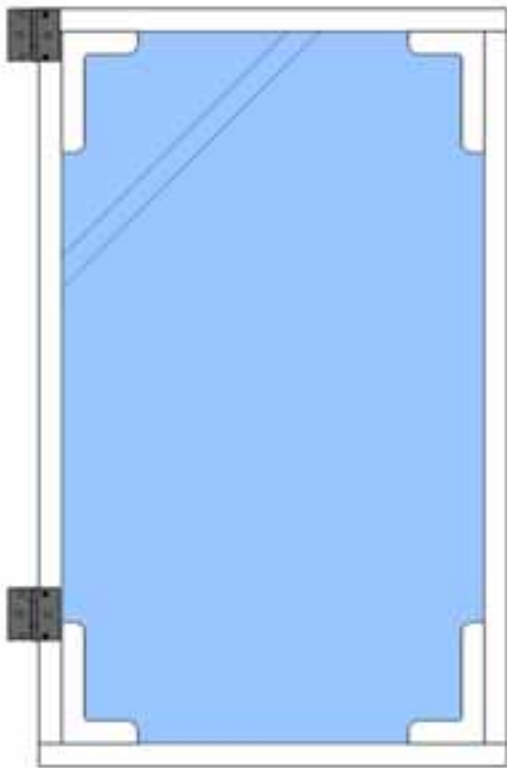

33. Locate both Bottom & Top Dutch Doors. On the ground, align 2 hinges per door. Fasten the hinges to the door with 2 - 2" Black Screws.

Pieces:

- 1x Dutch Door Top
(30 3/4" x 47")
- 1x Dutch Door Bottom
(30 3/4" x 36 1/2")




Hardware:

- 12x 2" Black Screws
- 4x Black Hinges




34. Shim the bottom door 3/8" up from the Foundation post. Attach door hinges to doorway post with 2 - 2" Black Screws per hinge. Repeat for top door leaving 1/4" between top & bottom door. Ensure door swings open smoothly before fastening 8 - 2" Black Screws in remaining holes.

Hardware:
8x 2" Black Screws

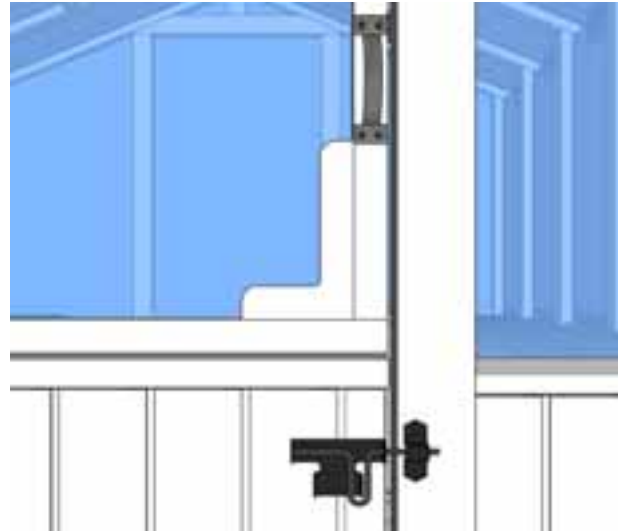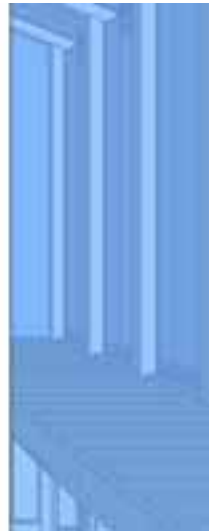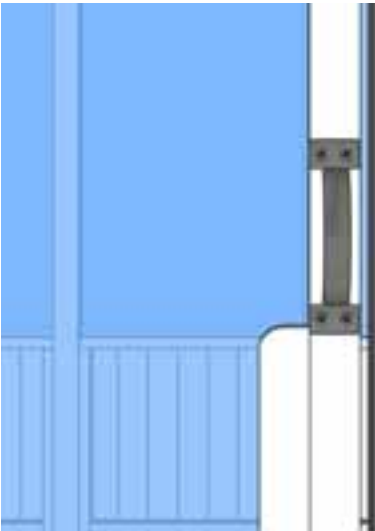

35. Fasten the Door Handle to the edge of the top of the Dutch Door with 4 - 3/4" Black Screws. Position the male portion of the drop latch onto the bottom of the dutch door and fasten with 6 - 3/4" Black Screws.


Hardware:
- 1x Black Pull Handle
- 1x Black Drop Latch
- 12x 3/4" Black Screws

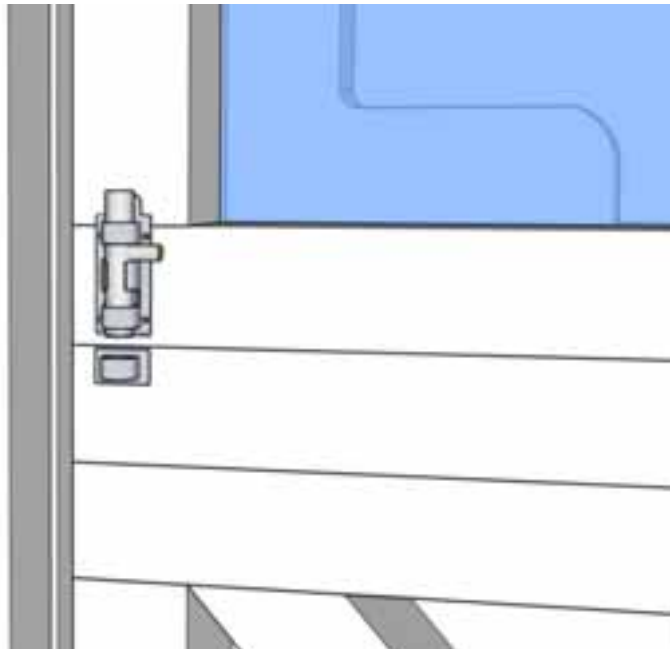

36. On the inside of the door attach a Silver Barrel Bolt to the inside of the door. Fasten the male portion to the top of the dutch door and the female portion to the bottom of the dutch .

Hardware:

- 1x Barrel Bolt
- 8x black 3/4" Screws

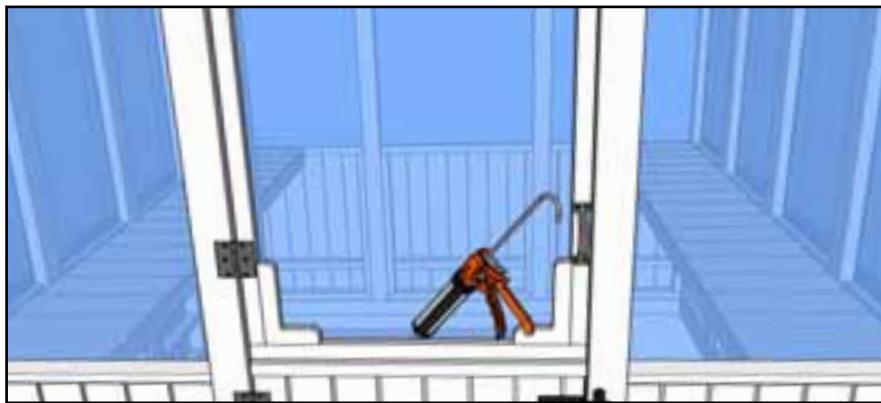


37. Apply caulk along Wall Trims, Roof Rafters, and Center Door Framing. Caulking gaps will help prevent moisture from entering and will help the longevity of your Greenhouse.


Hardware:

- 1x Tube of Silicone


Front Profile

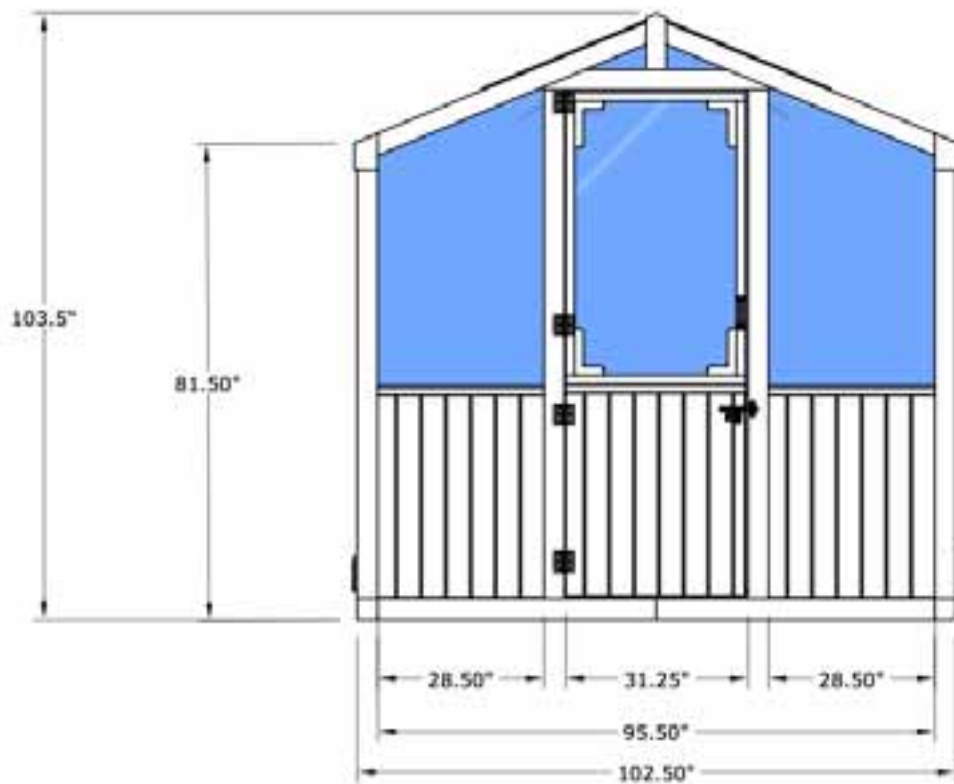

Rear Profile

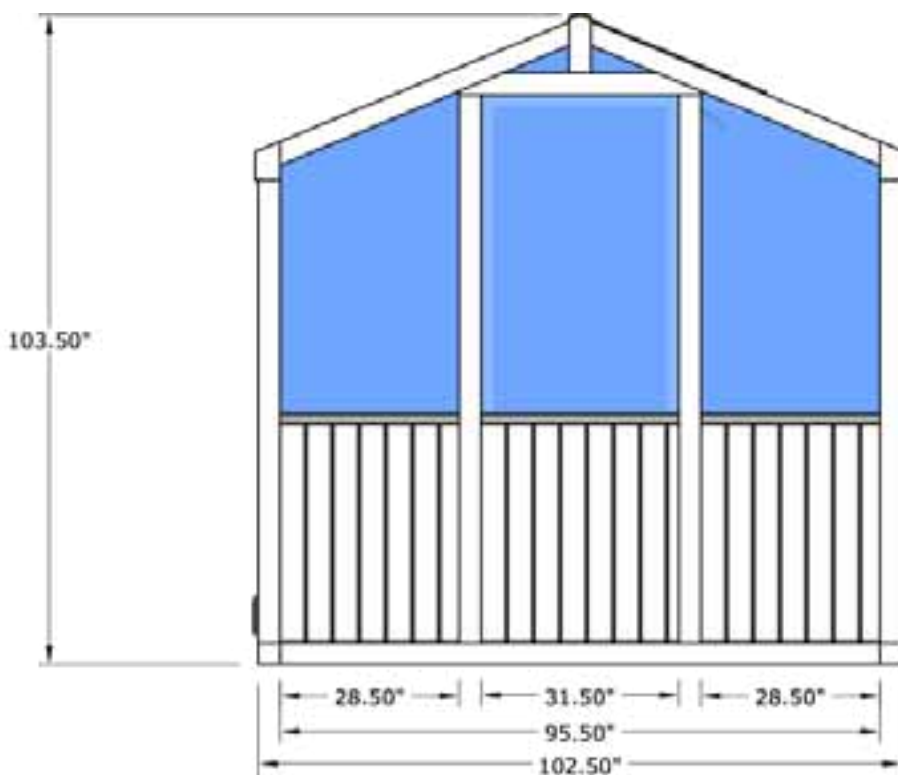


Right Side Profile

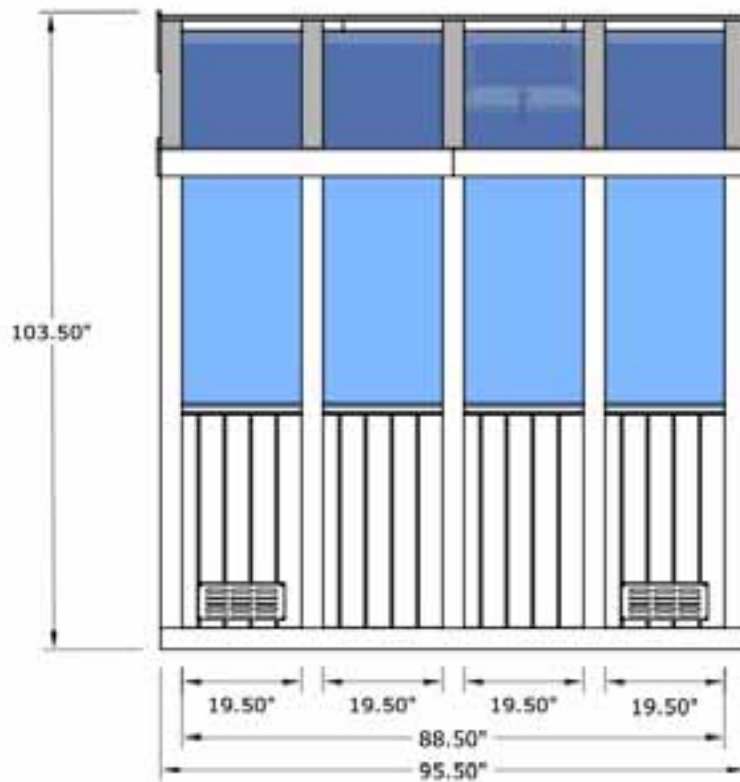

Left Side Profile



Top Profile

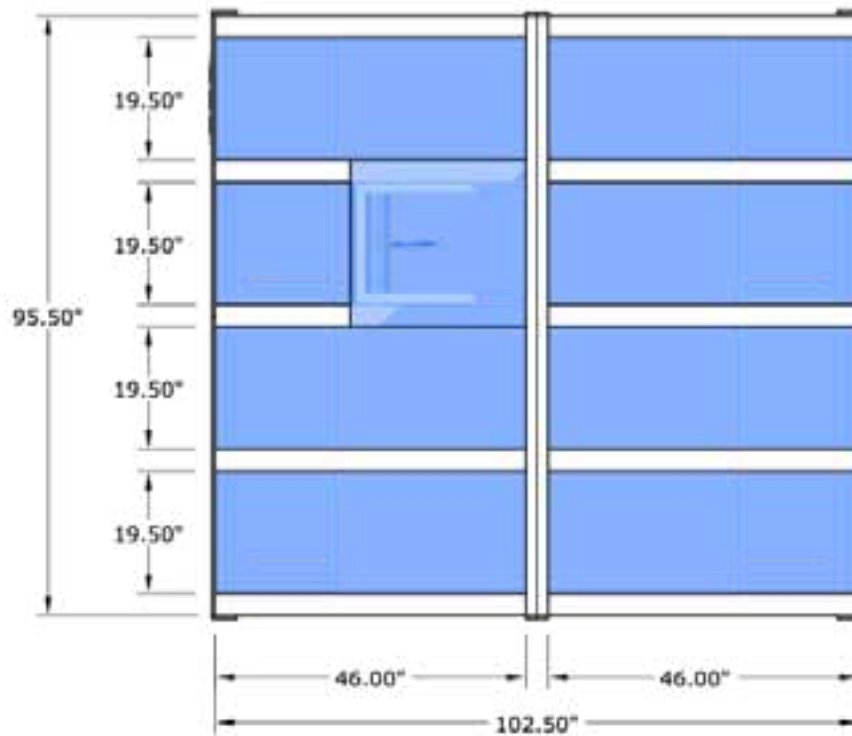



Outdoor Living Today

Congratulations on assembling your 8x8 Greenhouse!

Note: Our Sheds are shipped as an unfinished product. If exposed to the elements, the lumber will weather to a silvery-gray color. If you prefer to keep the lumber looking closer to the original color, we suggest that you treat the wood with a good oil base wood stain. You may also wish to paint your new shed rather than stain it. In both cases we recommend that you consult with a paint and stain dealer in your area for their recommendations.



We hope your experience constructing our **8x8 Greenhouse** has been both positive and rewarding. We value your feedback and would like to hear back from you on how well we are doing in the following areas:

1. Customer Service
2. On Time Shipping
3. Motor Freight Delivery
4. Quality of Materials
5. Assembly Manual
6. Overall Satisfaction



The materials contained in this Assembly Manual may be downloaded or copied provided that ALL copies retain the copyright and any other proprietary notices contained on the materials. No material may be modified, edited or taken out of context such that its use creates a false or misleading statement or impression as to the positions, statements or actions.

Please call, write or email us at:

Canadian Address
9393 287th Street
Maple Ridge, British Columbia
Canada V2W 1L1

United States Address
P.O. Box 96
Sumas, Washington
USA 98295

Toll Line: 1.888.658.1658

| Fax: 1.604.462.5333

| sales@outdoorlivingtoday.com