



Outdoor
Living Today

ASSEMBLY MANUAL

6x9 Sunflower Playhouse - T&G

Stock Code:

SP69-TG

Version #1.4

April 28, 2025



CONTACT

ADDRESS

9393 287th Street,
Maple Ridge, British Columbia,
Canada V2W 1L1

PHONE & FAX

Toll Free: 1-888-658-1658

Fax:

ONLINE

Email: olmsupport@outdoorlivingtoday.com

Web: www.outdoorlivingtoday.com

What You Need to Know

Thank you for purchasing a 6x9 Sunflower Playhouse

Please take the time to identify all the parts prior to assembly.

IMPORTANT INFORMATION

Our products are built for use based on proper installation and normal residential use, on level ground. Please follow the instruction manual when building your shed and retain the manual for future maintenance purposes.

Some of the safety and usage measures you may wish to consider include:

Snow load ratings vary by geographical location. If heavy or wet snowfall occurs, it is advisable to sweep snow off roof frequently. In areas with high or gusty wind conditions, it is advisable to install the structure securely to the ground.

Have a regular maintenance plan to ensure screws, doors, windows and parts are tightly affixed.

All structures purchased from Outdoor Living Today are covered for a period of one year for defects in manufacturing and workmanship. Costs incurred for customer installations are not included.

Failure to use supplied parts included in this kit could result in poor product performance and may void your warranty. Please contact Outdoor Living Today's Customer Toll Free Line if you plan to deviate from our written instructions.

Warranty

In the event of a missing or broken piece, please contact Outdoor Living Today **Customer Support at olmsupport@outdoorlivingtoday.com within 30 days of the delivery of your purchase.** It is our commitment to you to courier replacement parts, free of charge, **within 10 business days of this notification.** Replacement parts will not be provided free of charge after the 30 day grace period.

Customer agrees to hold Outdoor Living Today and any Authorized Dealers free of any liability for improper installation, maintenance and repair.

Thank you for purchasing a 6x9 Sunflower Playhouse.
Please take the time to identify all the parts prior to assembly.

Parts List

A. Floor Section

3 - 35" x 75" Floor Joist Frames
3 - 1 1/2" x 3 1/2" x 72" Floor Joists
2 - 35" x 75" Plywood Floor Pieces
13 - 1" x 5 1/2" x 34 1/8" Deck Boards for Porch
3 - 1 1/2" x 3 1/2" x 48" & 57" Floor Runners
(3 each size)

B. Wall Section

4 - 35" x 60" Solid Wall Panels (Bottom Wall Plates Unattached)
4 - 1 1/2" x 2 1/2" x 35" Bottom Wall Plates
3 - 35" x 60" Window Wall Panels
1 - 10" x 58 1/2" Narrow Porch Wall Panel
1 - 1 1/2" x 2 1/2" x 58 1/2" Left Side Door Jamb
1 - 1 1/2" x 2 1/2" x 35" Door Header
1 - 23" x 32 1/2" Bottom Door
1 - 23" x 25" Top Door
1 - 1/2" x 2" x 33" Above Door Filler Trim
1 - 1 1/4" x 1/4" x 23" Threshold for Doorway (angle cut on edge)

C. Rafter & Roof Section

18 - 1 1/2" x 2 1/2" x 44 7/8" Rafters (angle cut on ends)
2 - 3/4" x 3 1/2" x 44" - Ridge Boards
2 - 3/4" x 3 1/2" x 61" - Ridge Boards
4 - 1/2" x 4 1/2" x 52 1/2" Soffits (Both Sides)
4 - 3/4" x 2 1/2" x 36" Facia/Roof Nailing Strips

Roof Panels

4 - 41" Outside Roof Panels (Shingles overhanging Roof Plywood on 1 end)
2 - 35" Middle Roof Panels (Shingles flush with Roof Plywood)

D. Porch Section

2 - 3 1/2" x 3 1/2" x 58 7/8" Porch Posts (long)
1 - 3 1/2" x 3 1/2" Deck Post (short)
3 - Hand Rail Sections (30" w x 22)
2 - 3/4" x 3 1/2" x 34 1/2" Top Plate Front Extensions
1 - 1" x 4 1/2" x 58 7/8" Front Wall Trim/Support
(includes 4 1/2" Filler Strip Attached to back)
1 - 1 1/8" x 4 1/2" x 58 7/8" Front Wall Trim/Support
(includes 2 1/2" Filler Strip Attached to back)
4 - Corner Brackets
12 - 1/2" x 1 1/2" x 4" Post Base Trims
2 - Sheets (34 1/2" x 37" x 1/8") for Porch Ceiling
3 - 1 1/2" x 3 1/2" x 3 1/2" Rail Support Blocks

E. Miscellaneous Section

Ridge Caps

1 Bundle Cedar Shingle Roof Ridge Caps - 18 pcs

Bottom Skirting

2 - 1/2" x 4 1/2" x 38" Front Bottom Skirting
8 - 1/2" x 4 1/2" x 34 3/4" Bottom Skirting

Corner & Sidewall Trim

7 - 1/2" x 2 1/2" x 64" Rear / Sidewall Trims
2 - 5/8" x 2 1/2" x 60" Back Wall Filler Trims
2 - 1/2" x 4 1/2" x 67" Back Wall Wide Corner Trims
1 - 1/2" x 2 1/2" x 67" Horizontal Trim above Door & Window Wall
1 - 1/2" x 2 1/2" x 67" Horizontal Gable Trim
1 - 1/2" x 2 1/2" x 58" Front Wall Porch Trim
1 - 1/2" x 2 1/2" x 58" Front Door Porch Trim

Facia Trim

4 - 3/4" x 3 1/2" x 46" Rear Facia (Angle cut on ends)
4 - 3/4" x 3 1/2" x 57" Side Facia

Filler Shingles (5 1/2" wide)

12 pcs Long Filler Shingles
4 pcs Short Filler Shingles

**Miscellaneous Pieces

3 - Window Inserts
3 - Window Trim Pkgs - (1-24 1/16" angle cut / 3 -23" straight cut)
2 - Flower Box Kits
2 - Pentagon Facia Plates
2 - Facia Detail Plates
1 - Spare Wall Siding
2 - Shim Shingles (Use to shim door, etc)

Note: All Trim, Facia and Bottom Skirting pieces will be positioned rough face out when installed.

6X9 SUNFLOWER HARDWARE PACKAGE

Hardware Kit (Provided)

2 1/2"  198 pcs

2"  170 pcs

1 1/4"  212 pcs

3/4"  30 pcs


3/4"  38 pcs
Black Headed

1 1/2"  410 pcs
Finishing

1 1/2"  50 pcs
Shingle

 1 pc
Square Drive Bit

 Single Rafter
Bracket x 4

 Double Rafter
Bracket x 2

 Door Hinge x 4

 Door Handle (1)

 Simpson Strong
Tie x 4

 Ridge Board
Connector x 2

Tools Required (Not Provided)



Hammer



Screw Gun/Drill



Tape Measure



Wood Clamp



Utility Knife



Level



Pliers



Ladder



1/8" Drill Bit

Safety Equipment Required (Not Provided)




Safety Glasses



Work Gloves

A. Floor Section

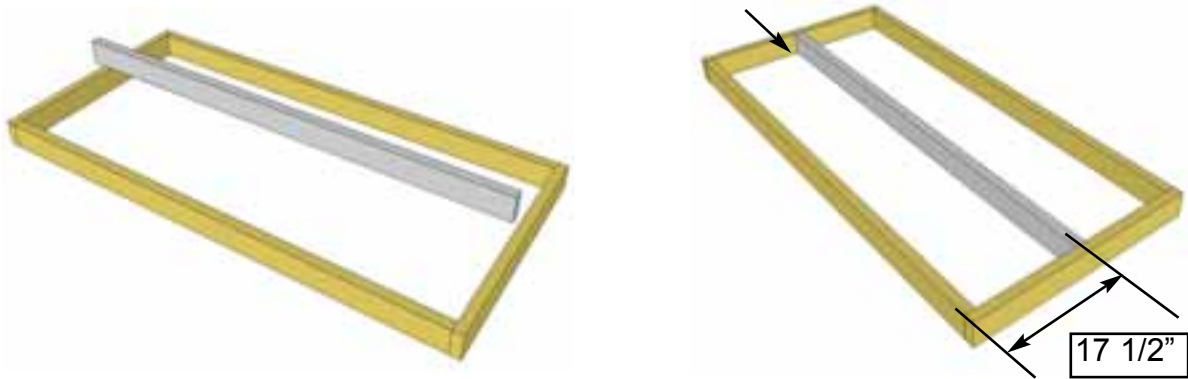

1. Floor Joist Frames require one interior Floor Joist attachment each. Center Floor Joist (17 1/2" from outside of Frame to center of Floor Joist) and attach with 2 - 2 1/2" screws per end. You can find the Square Drive Bit for the screws in with the Hardware Kit Bag.


Pieces:

- 3x Floor Joist Frames (35"x 72")
- 3x Floor Joists (1 1/2" x 3 1/2" x 72")

Hardware:

- 12x 2 1/2" Screws

2. Lay out Floor Joist Frames as illustrated in left picture.

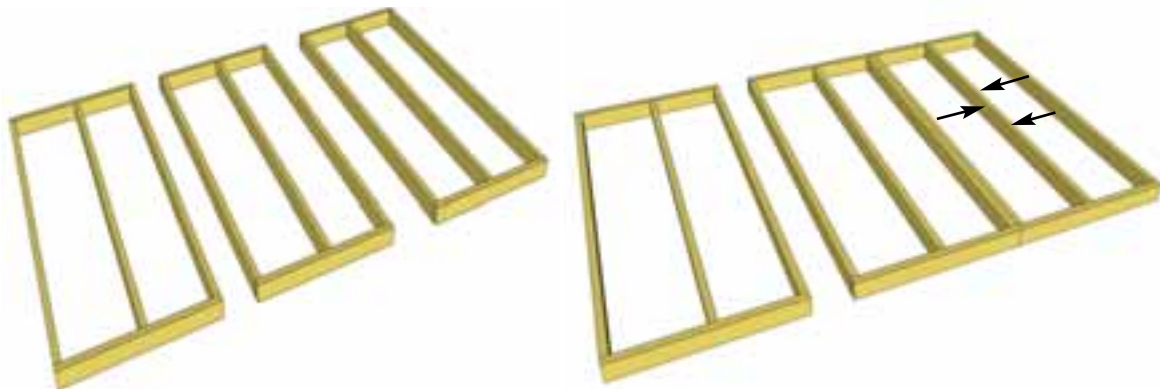

You can find the Square Drive Bit for the screws in with the Hardware Kit Bag.


3. Attach the Floor Joist Frames together with 6 - 2 1/2" screws per section. Attached, your Floor Joist section should be 75" wide x 105" deep.


Pieces:

- 3x Floor Joist Frames (35"x 72")

Hardware:

- 12x 2 1/2" Screws

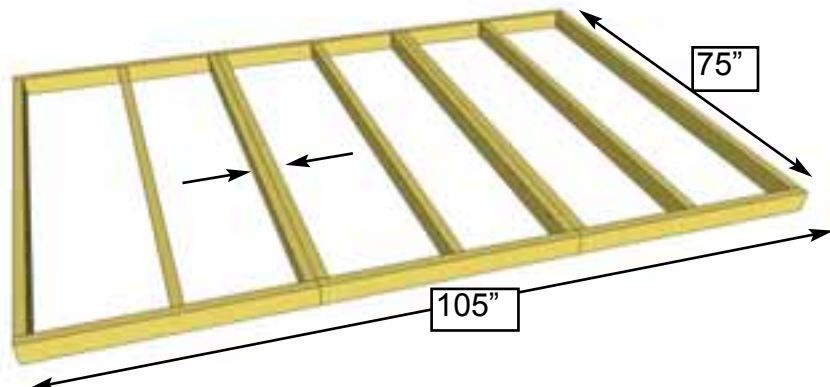

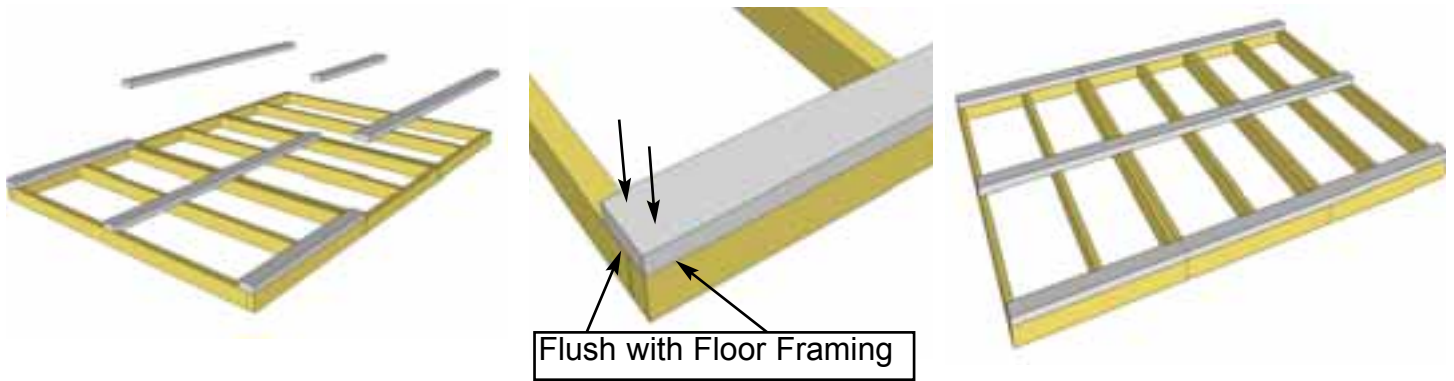



4. Attach **Floor Runners** to completed Floor Joist Frames. There are two Floor Runners per 105" side and three completed Floor Runners in total. Use **6 - 2 1/2" screws** per Runner to secure.

Pieces:

- 3x Floor Runners
(1 1/2" x 3 1/2" x 48" & 57")

Hardware:


- 12x 2 1/2" Screws

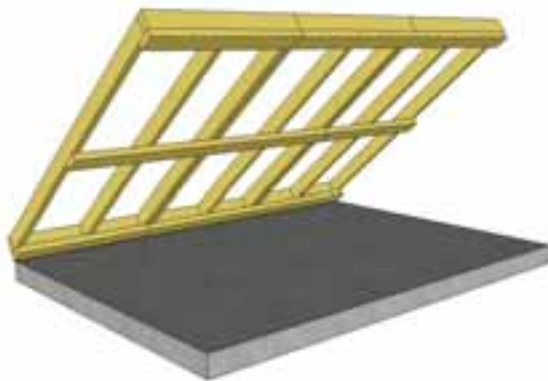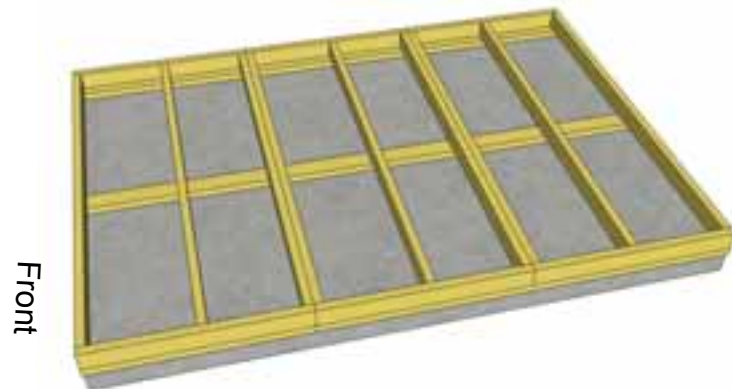

Foundations

NOTE: The floor will be flipped over and Floor Runners will sit on your foundation. It is important to note that having a level foundation is critical. Choosing a foundation will vary between regions. Typical foundations can be concrete pads or patio stones positioned underneath the Floor Runners.


5. With Floor Runners attached, carefully flip the floor over and place on your foundation. **CAUTION:** You will need two people to assist you. Be careful not to bend or twist the floor when laying floor down. When in place, level floor completely.

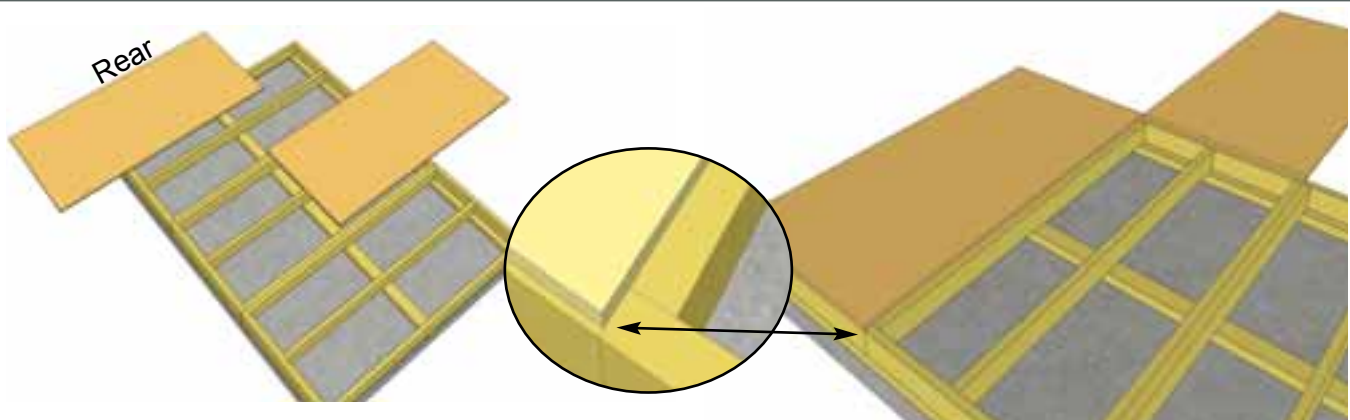



6. Position **Plywood Floor** pieces (2) on top of completed Floor Joists. Plywood is cut slightly smaller than floor framing. Keep plywood seam tight.

Pieces:

- 2x Plywood Floor Pieces
(35" x 75")

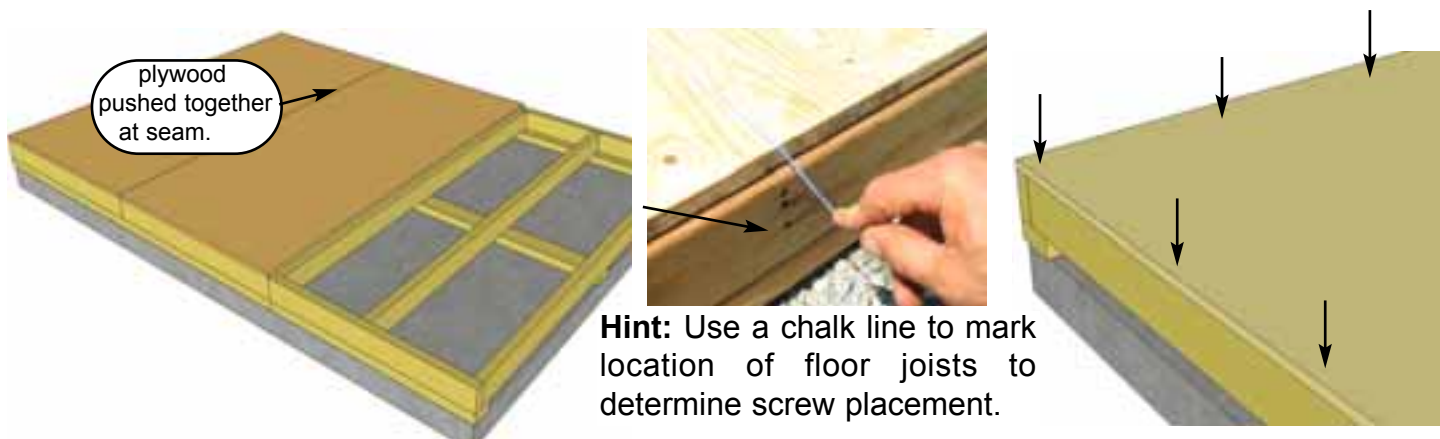

7. When Plywood Floor is correctly positioned, attach with **1 1/4" screws**. Use screws every 16".

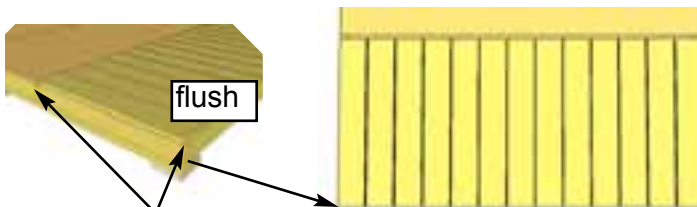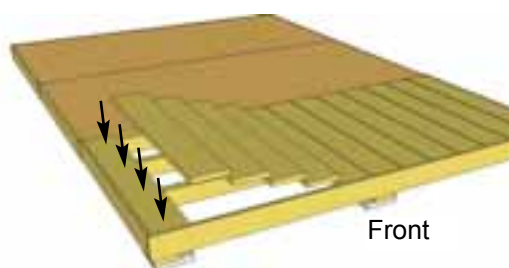

Make sure deck boards are flush to the front and sides of the floor frame. There will be a gap between the plywood and the deck boards.

8. Attach thirteen pieces of 1 x 5 1/2" **Decking** flush to front using **4 - 2" screws per piece**. With Decking, attach both outside pieces first and equally space all others on the floor before attaching.

NOTE: When floor is completed, make sure it is still level and make adjustments if required.


Pieces:

13x Deck Boards
(1" x 5 1/2" x 34 1/8")

Hardware:

52x 2" Screws


B. Wall Section

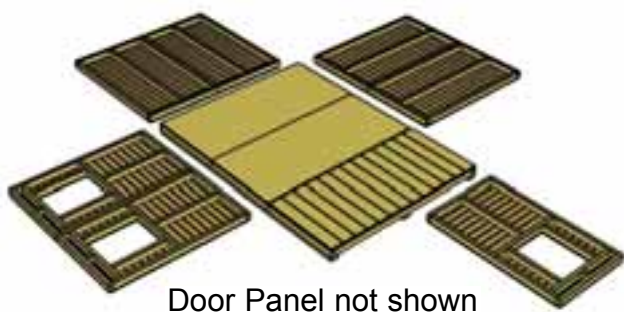

9. Lay out all the Wall Panels and become familiar with their location. On Standard Kits, there are **3 Window Wall Panels** and **4 Solid Wall Panels**. All wall panels are 35" wide x 60" high and can be placed in any location, except for the **Door Panel** (not shown to the left). The Door Panel must be positioned to the left front. **NOTE:** You must attach **Wall Plates** to the bottom of all Solid Wall Panels. **Window Inserts** for Window Walls will need to be positioned and attached as Per **Step 11**.

Pieces:

- **3x Window Wall Panels**
(35" x 60")
- **4x Solid Wall Panels**
(35" x 60")

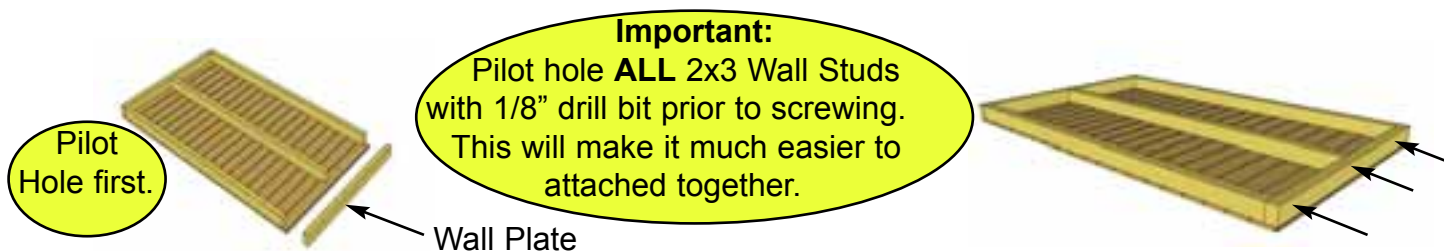

10. Starting with **Solid Wall Panels**, carefully lay panel face down. Position and attach **Wall Plate** to bottom of wall studs of each Panel with **3 - 2 1/2" screws**. Position so plates are flush with framing.

Pieces:



- 4x Solid Wall Panels (35"x 60")
- 4x Bottom Wall Plates (1 1/2" x 2 1/2" x 35")

Hardware:

- 12x 2" Screws

Note: We recommend you wait to install the windows last, so they don't get damaged during construction.

Dab caulk in siding channels on both sides of window and along top of window

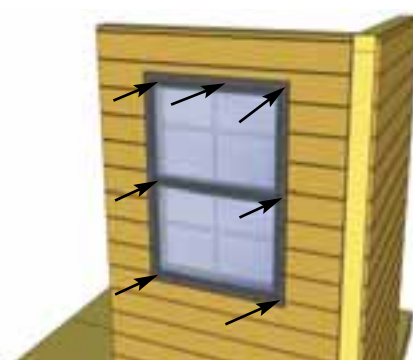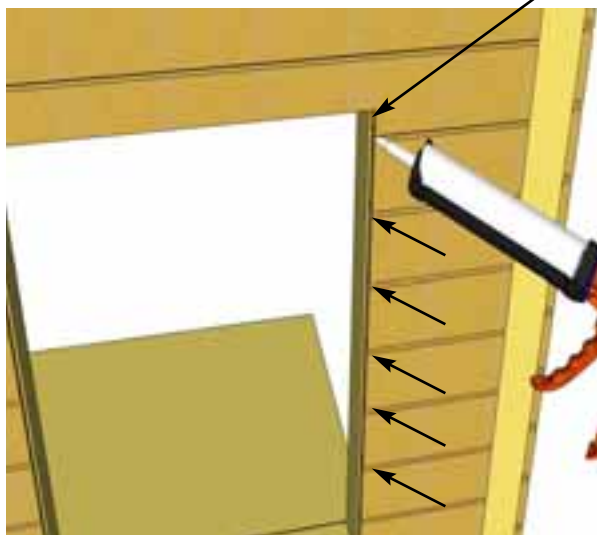

11. Locate **Window Inserts for Window Walls**. Before installing, dab caulk in siding channel on both sides and across top of window opening. This will prevent water from getting in behind window. Position window in cavity and secure with **8 - 1 1/4" screws**. Window Trims in Step 21 will be installed to hide caulking. Complete Window Inserts as walls are erected or completed.

Pieces:

- 3x Window Wall Panels (35"x 60")
- 3x Window Inserts

Hardware:

- 8x 1 1/4" Screws


11a. Position Window Trim around window doing a dry run first and attach with **4 - 1 1/2" finishing nails per piece**. The window kit trim pack = 1x 24 1/16" = top / 3 x 23" = sides and bottom. Window trim has a small dado on reverse face. Outside flange of window will roughly sit in the dado to give a better fit.

Pieces:

- 4x Window Trim
(1@ 24 1/16" angle cut ")
(3@ 23" angle cut ")

Hardware:

- 16x 1 1/2" Finishing Nails

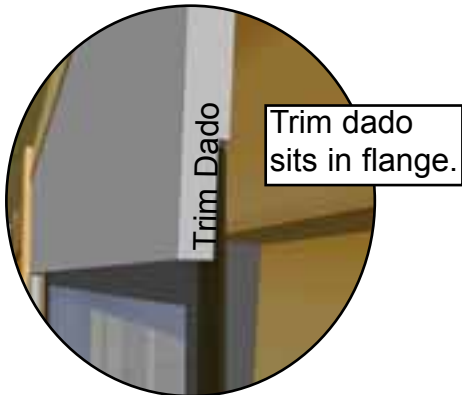


12. Starting at rear corner, position a **Wall Panel** on top of plywood floor. Depending on your preference, you may use a **Solid** or a **Window Wall Panel** in this position. If using a Solid Wall, make sure panel is facing up.

Pieces:

-1 x Wall Panel
(35" x 60")



IMPORTANT: Make sure all walls are aligned in their upright position. If they aren't, water may leak into your playhouse. Unsure if panel is facing up or down? Check siding on Window Wall Panel to match alignment.

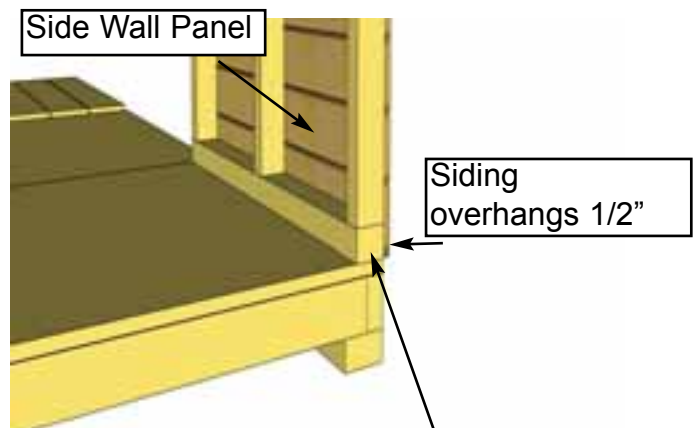

Frame of Wall Panel will be flush with outside of Floor Frame when properly aligned.


13. The Side Wall Panels will sit flush at the end of the Plywood Floor with the front and rear panels sandwiched between them. **NOTE:** Siding will overhang the floor by approx. 1/2". Position Rear Solid Wall on floor in corner and attach vertical wall studs together with 3 - 2 1/2" screws.

Pieces:


- 1x Solid Wall Panel
(35" x60")

Hardware:

- 3x 2 1/2" Screws

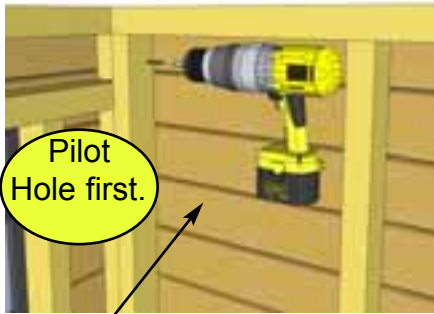

vertical wall stud

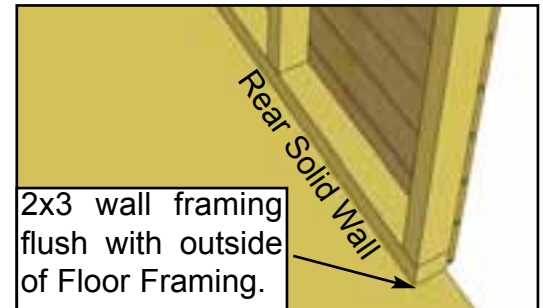

Screw at the top, middle and bottom of 2x3 stud. **Do Not Attach Walls To Floor Until Step 17.**

14. Continue to attach walls, working your way around the playhouse. Once again, screw walls together using 2 1/2" screws at the top, middle and bottom of Wall Studs.

Pieces:

- 3x Solid Wall Panels
(35" x60")
- 2x Window Wall Panels
(35" x60")

Hardware:

- 15x 2 1/2" Screws




15. To attach the Door, first position the **10" wide Narrow Wall** next to the Window Wall and screw into adjoining wall stud with **3 - 2 1/2" screws**.

Pieces:

- 1x **Narrow Wall Panel**
(10" x 58 1/2")

Hardware:

- 3x **2 1/2" Screws**

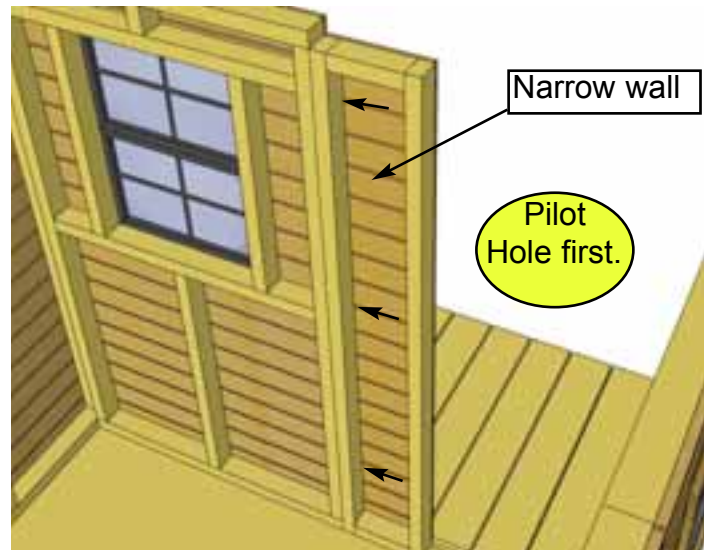




16. Attach the **Left Side Door Jamb** to Left Side Wall Stud. Make sure Door Jamb is flush with floor and flush with existing wall stud. Use **3 - 2 1/2" screws** to secure. Next, attach the **Door Header** to Door Jamb and Top Plate of Narrow Wall. Use **3 - 2 1/2" screws** to secure. **IMPORTANT:** Check door opening measurement at top and bottom. It should be **23 1/2"**.

Pieces:

- 1x **Left Side Door Jamb**
(1 1/2" x 2 1/2" x 58 1/2")
- 1x **Door Header**
(1 1/2" x 2 1/2" x 35")


Hardware:

- 6x **2 1/2" Screws**

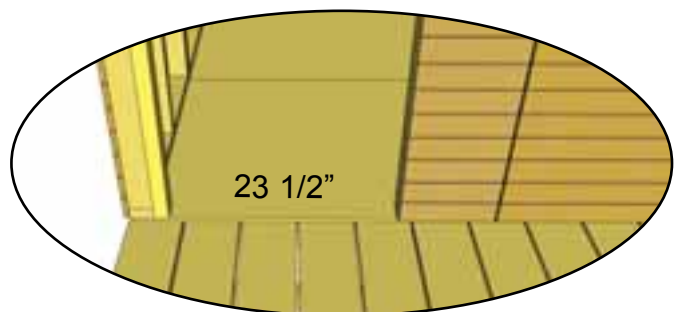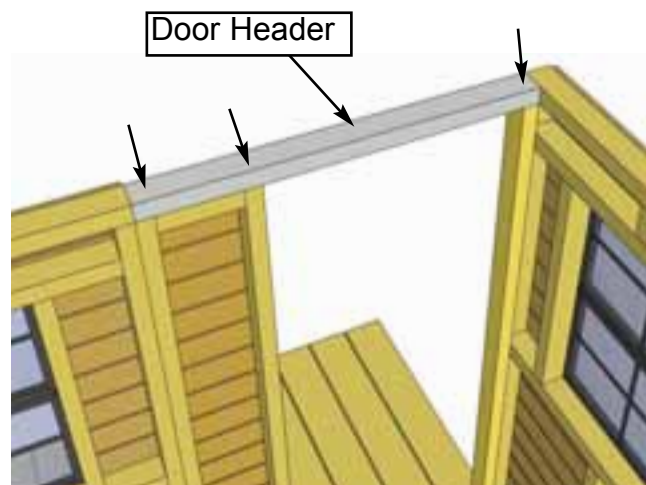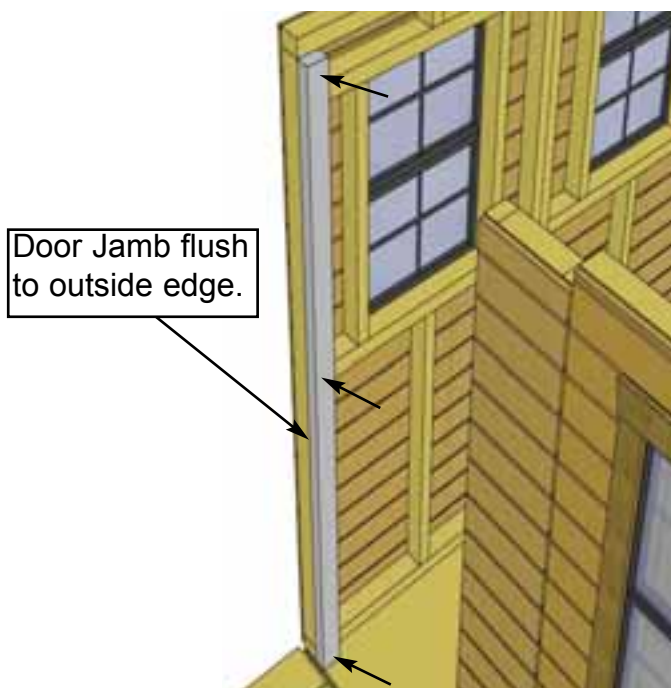


Angle
screws into perimeter
Floor Joists.

Pilot
Hole first.

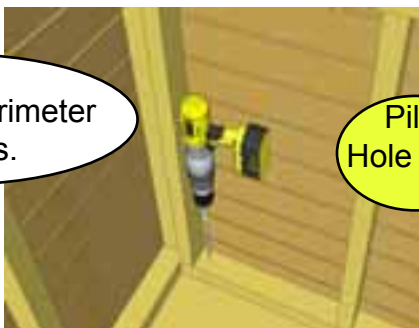

Optional - Caulking seams will help prevent moisture from entering your shed. **Caulking not included in kit.**

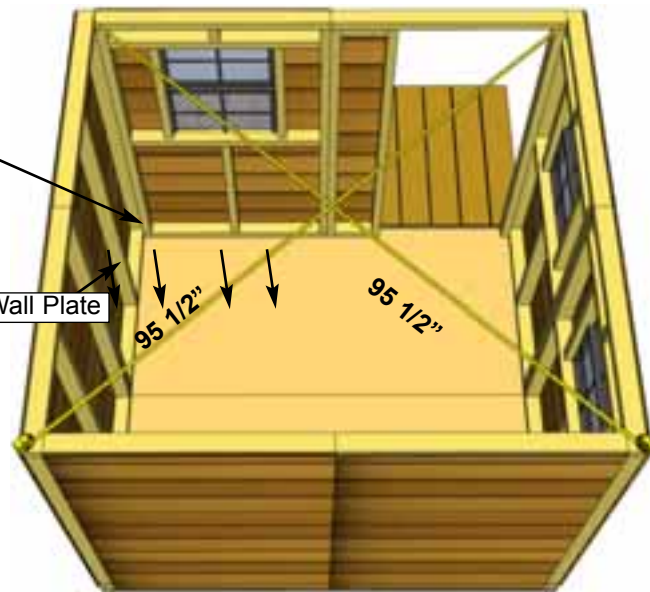

Advice: Prior to fastening walls and installing rafters, take time to confirm your walls are level, square and plumb.

Measure diagonal at top and bottom of walls corner-to-corner. This should be approximately 95 1/2". More importantly, if measurements are not within 1/4", your walls are not square. Adjusting now will make it easier to the roof section later.


17. When all walls are attached together, check alignment with the floor. Bottom Wall Plates should sit flush with outside of Floor Framing. When positioned correctly, fasten Bottom Wall Plates to floor using 4 - 2 1/2" screws per Wall Panel.

Pieces:


- 4x Bottom Wall Plate
(1 1/2" x 2 1/2" x 35")

Hardware:

- 32x 2" Screws

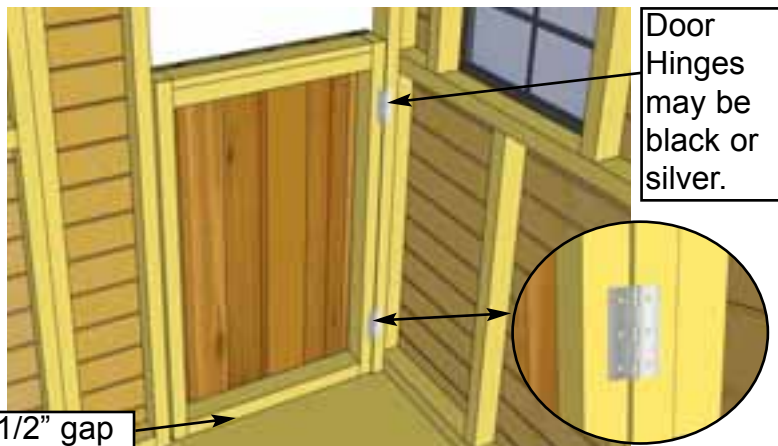

Door
Hinges
may be
black or
silver.

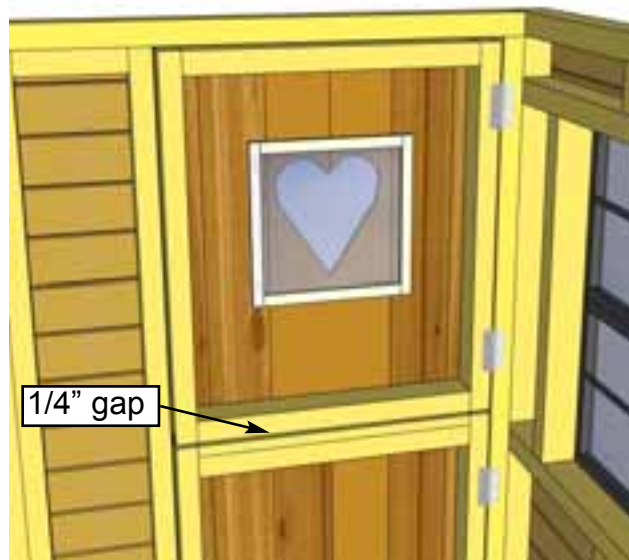

18. Attach 2 Hinges (top and bottom) to Bottom Door framing with 3/4" Black Headed Screws. Position the Door into door opening. Leave a 1/2" gap between floor and bottom of door framing. Use Spare Shingle to help shim door into proper position. Initially, secure Door to Door Jamb with one screw per hinge. Check door alignment by moving door back and forth. When satisfied with position, completely secure Door to Door Jamb. Follow same procedure for Top Door leaving 1/4" gap between doors.

Pieces:

- 4x Hinges

Hardware:


- 24x 3/4" Black Headed Screws



19. Attach **Door Handle** and **Interior Silver Barrel Bolt Hardware**. Use **3/4" Black Headed Screws** to secure the Door Handle. **Important:** Drill shallow Pilot Holes to prevent wood from splitting. Align male and female Barrel Bolt to Door Framing. Attach with **3/4" Black Headed Screws**.

Hardware:

- 1x Door Handle
- 1x Barrel Bolt
- 3/4" Black Headed Screws

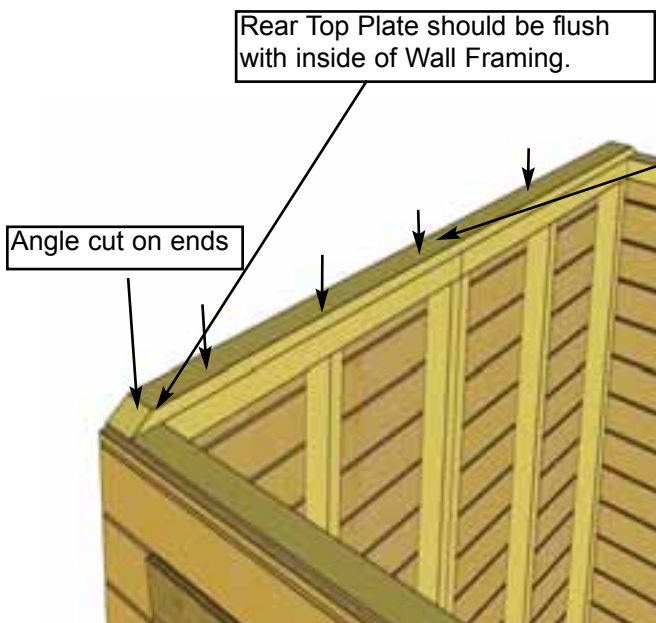

Important: when attaching Top Plates, have end screws tie into Side Walls.





20. Position angle cut **Rear Top Plate** (rear only) on top of wall studs so it is flush on the inside with 2x3 Wall Plate. The Rear Top Plate has an angle cut on the ends. Attach by screwing down into top Wall Plate with **4 - 2" screws**.

Pieces:

- 1x Rear Top Plate
(3/4" x 2 1/2" x 75")

Hardware:

- 4x 2" Screws

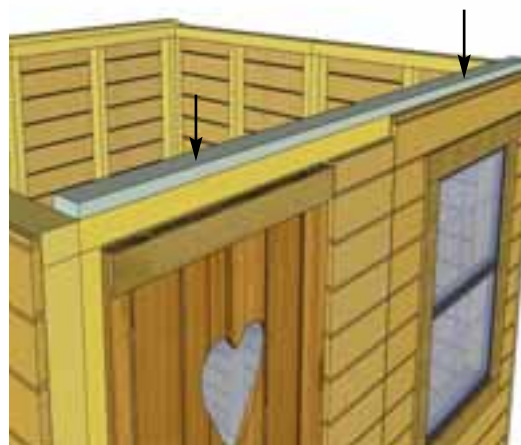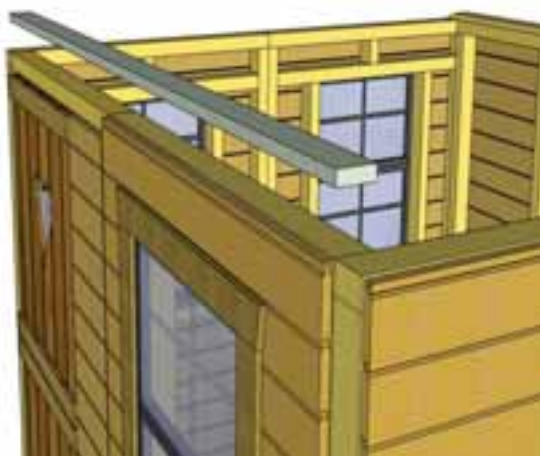



21. Position the **Front Top Plate** on top of Door and Front Wall Panel. Front Top Plate is straight cut on the ends and is 70" long. Once again, the Top Plate will be flush with inside of Top Wall Plate. Attach with **4 - 2" screws** into Header and Wall Framing.

Pieces:

- 1x **Front Top Plate**
(3/4" x 2 1/2" x 70")

Hardware:

- 4x **2" Screws**

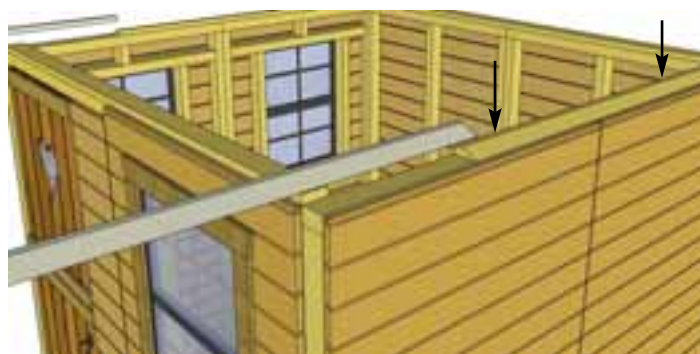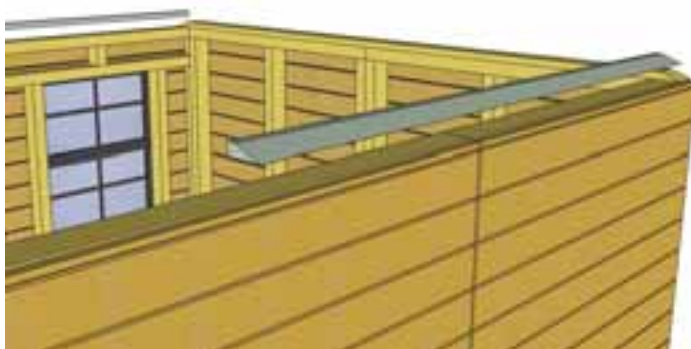

22. Next, attach the four **Side Top Plates** (2 per side). The Side Top Plates are angle cut down the length. Once again, position Top Plate on Wall Plate so it is flush with inside of Wall Plate. Side Plate should also be flush with Rear Wall Plate. When in correct position, screw down plate with **4 - 2" screws** per piece.

Pieces:


- 4x **Side Top Plate**
(3/4" x 2 1/2" x 50 3/4")

Hardware:


- 16x **2" Screws**

23. Complete all Side Top Plate attachments as described above.

CAUTION: Side Top Plates will be protruding out from the playhouse. Please use caution in the work area.

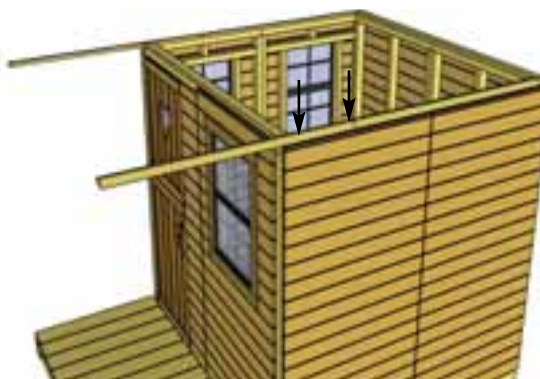

24. Complete the 2 **Porch Rail Sections**, following steps **A** through **D**. **Note:** Sections differ - see step B for orientation.

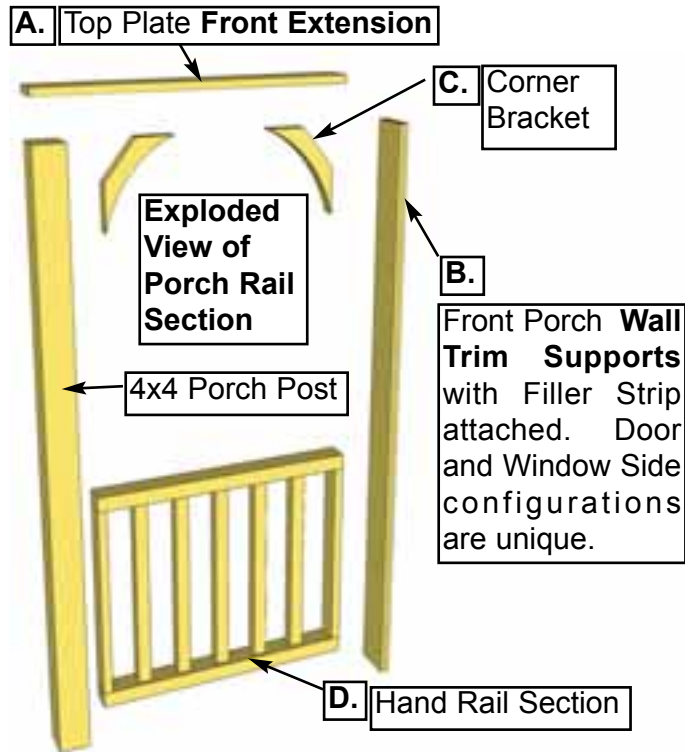

A. Attach 1x4 Top Plate Front Extension (34 1/2"L) to 4x4 Porch Post with 2 - 2" screws. Make sure support is flush with post.


Pieces:

- 2x Top Plate Front Extension
(3/4" x 3 1/2" x 34 1/2")
- 2x Porch Post
(3 1/2" x 3 1/2" x 58 7/8")

Hardware:


- 2x 2" Screws

A

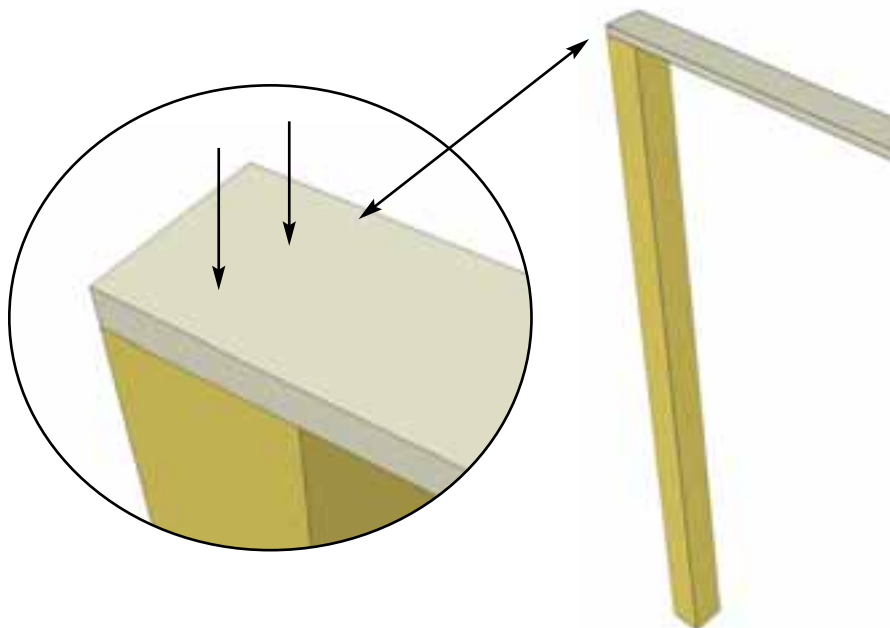

Important: Pilot Hole Plate to prevent splitting!

B. Attach 1x4 1/2" Wall Trim/ Supports to Front Extension using 2 - 2" screws. Make sure Front Extension is Flush to back of wall trim and centered 1/2" on each side. **Note:** there are 2 different wall supports for left & right. See diagram for proper orientation.

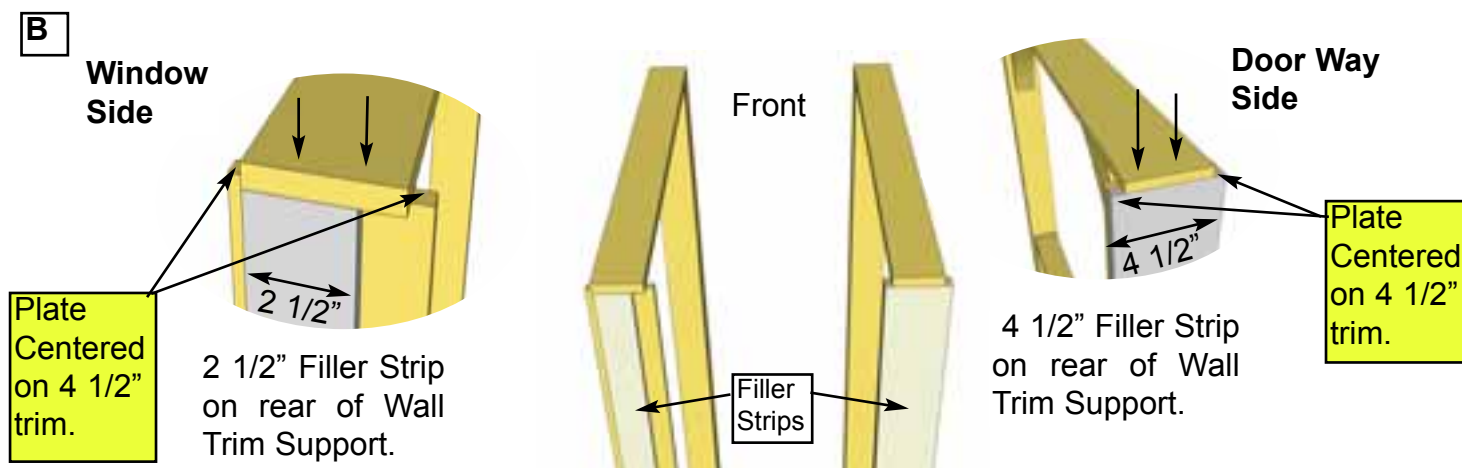


Pieces:

- 1x Wall Trim/ Supports (3/4" x 4 1/2" x 34 1/2")
- 1x Wall Trim/ Supports (3/4" x 2 1/2" x 34 1/2")

Hardware:

- 4x 2" Screws

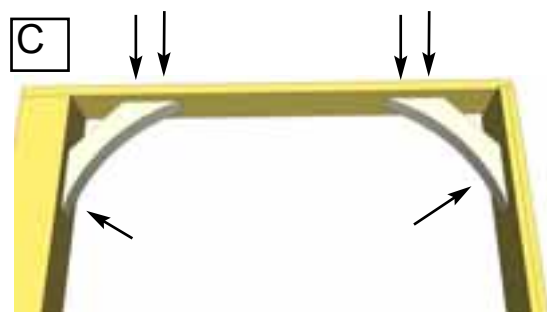

C. Attach both Corner Brackets with 2 - 2" screws from Front Extensions into Brackets, and 1 - 2" screw into vertical posts. Drill Pilot hole in bracket first.

Pieces:

- 4x Corner Brackets (3/4" x 3 1/2" x 34 1/2")

Hardware:

- 6x 2" Screws


D. Attach Hand Rail to complete your Porch Rail Section. Handrail should start 3 1/2" from bottom of Post and be centered on Trim and Post. Attach with 3 - 1 1/4" screws on Trim side, and 3 - 2" screws on Post side.

Pieces:

- 2x Hand Rail (30" x 22")

Hardware:



- 3x 1 1/4" Screws
- 3x 2" Screws

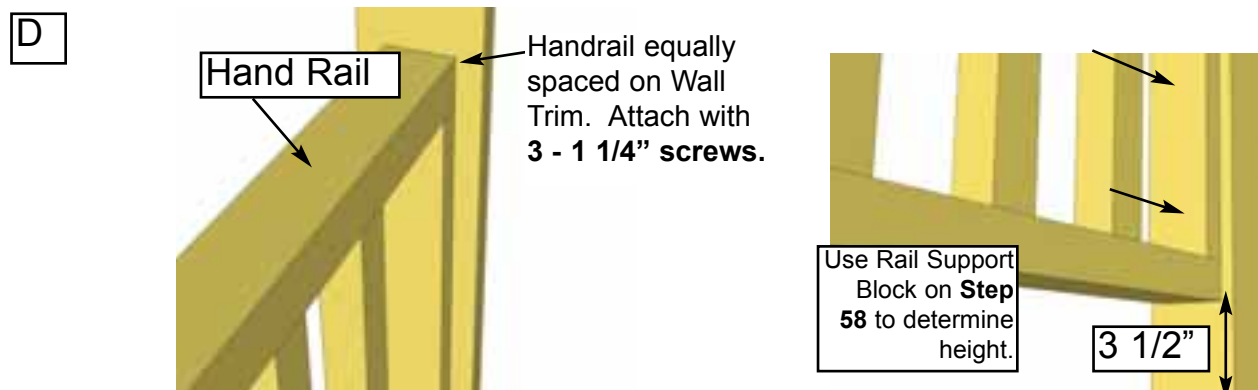



25. When both Porch Rail Sections are complete, lift into place on Playhouse Deck and beneath the Side Top Plate. (Window Side section will have **Narrow Filler Trim**). Position so Post is flush with Decking on the side and recessed 1/2" in the front. Attach wall support to playhouse wall with 3 - 2 1/2" screws. Try to conceal screws if possible.

<u>Pieces:</u>	<u>Hardware:</u>
- 1x Window Side Porch Rail	- 3x 2 1/2" Screws

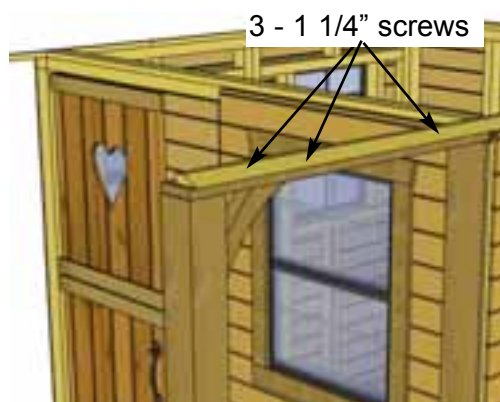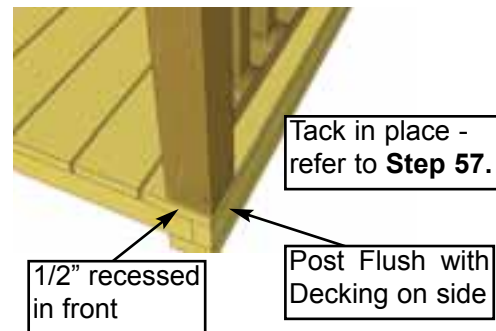


Screw Side Top Plate into porch section with 3 - 1 1/4" screws. Screw into Corner Brackets and Post to conceal screws. Complete the other Porch section.

<u>Pieces:</u>	<u>Hardware:</u>
- 1x Window Side Porch Rail	- 3x 1 1/4" Screws



The Rear Gable Framing should sit flush with the inside of the Top Plate. It should also be centered sideways on the Top Plate. **HINT:** Use a straight edge to check the angle of the Gable Framing and Top Plate. Both angles should line up. Adjust gable accordingly. Attach with 2 - 2" screws.

<u>Pieces:</u>	<u>Hardware:</u>
- 1x Rear Gable Wall	- 2x 2" Screws

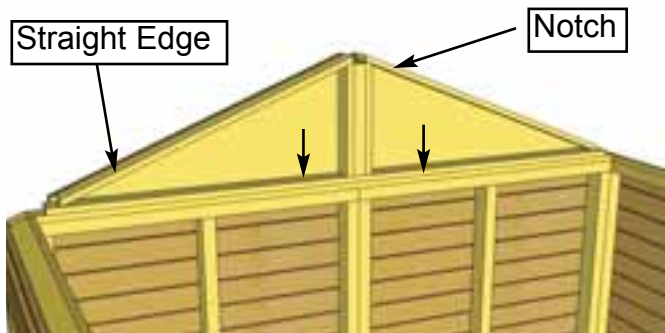

26. Position the **Rear Gable Wall** on top of the Rear Top Plate. The Rear Gable can be distinguished from the other two gables because it has Designer Shingles protruding below frame. Temporarily attach to walls and top plate with 2 - 2" screws. Gables may need slight adjustment in **Step 38**. Complete attachment when correctly aligned in **Step 38** with an additional 6 - 2" screws.

<u>Pieces:</u>	<u>Hardware:</u>
- 1x Rear Gable Wall	- 8x 2" Screws



27. Position the **Middle Gable Wall** on top of Front Top Plate. When in correct position, attach with 2 - 2" screws as per Step 26. Complete installation in Step 39.

Pieces:


- 1x Middle Gable Wall

Hardware:

- 2x 2" Screws

C. Rafter and Roof Section

Exploded view of all parts necessary to complete the Roof Section. Identify all parts prior to starting. (Roof Filler Shingles Missing)

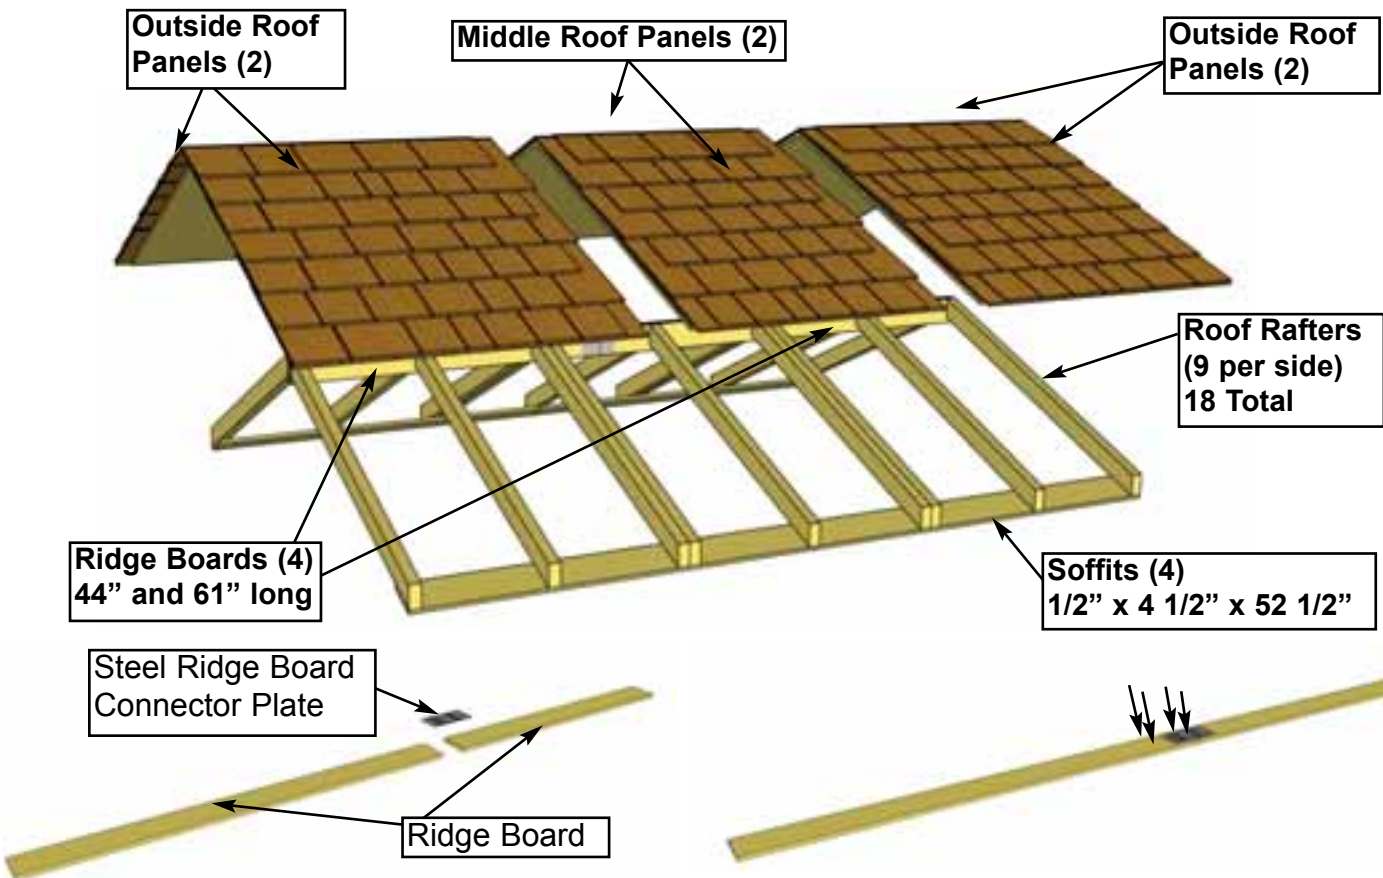

28. Locate (1 each) 3/4" x 3 1/2" x 44" & 61" **Ridge Boards** and attach together with **Steel Ridge Board Connector Plates** using 8 - 3/4" screws. Total length when connected is 105". Complete two sets.

Pieces:

- 1x Ridge Board
(3/4" x 3 1/2" x 44")
- 1x Ridge Board
(3/4" x 3 1/2" x 61")


Hardware:

- 2 Steel Ridge Board Connector Plates
- 8x 3/4" Screws

29. Locate **9 Rafters**, **2 Soffits** and completed Ridge Board. Lay out on level ground as shown to the right. Double up Rafters as illustrated. Screw doubled up Rafters together with **3 - 2 1/2" screws** per piece.


Pieces:
 - 9x Rafters
 (1 1/2" x 2 1/2" x 44 7/8")
 - 2x Soffit
 (1/2" x 4 1/2" x 52 1/2")

Hardware:
 - 27x 2 1/2" Screws

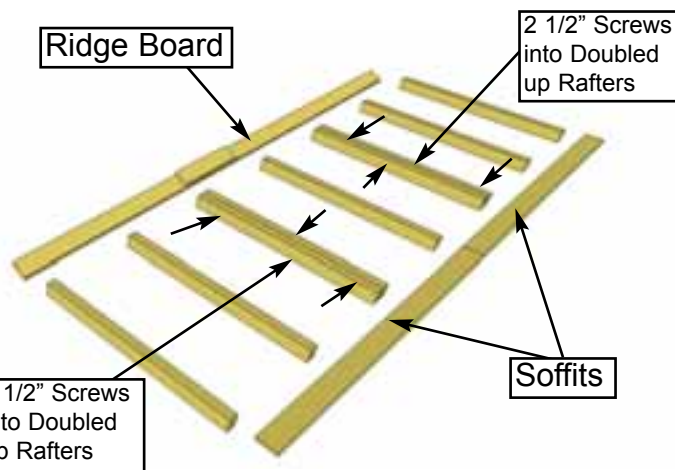


30. Attach completed Ridge Board to ends of both outside rafters with **2 - 2" screws** per end. Measure and position interior Rafters as illustrated below. When positioned correctly, attach Ridge Board to remaining rafters with **2 - 2" screws** /rafter end.


Hardware:
 - 4x 2" Screws

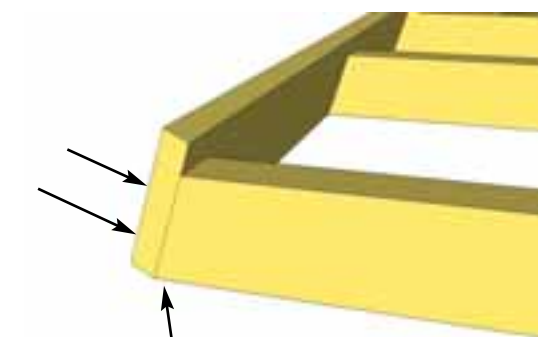

Important:
 Pilot Hole Ridge Board to prevent splitting!

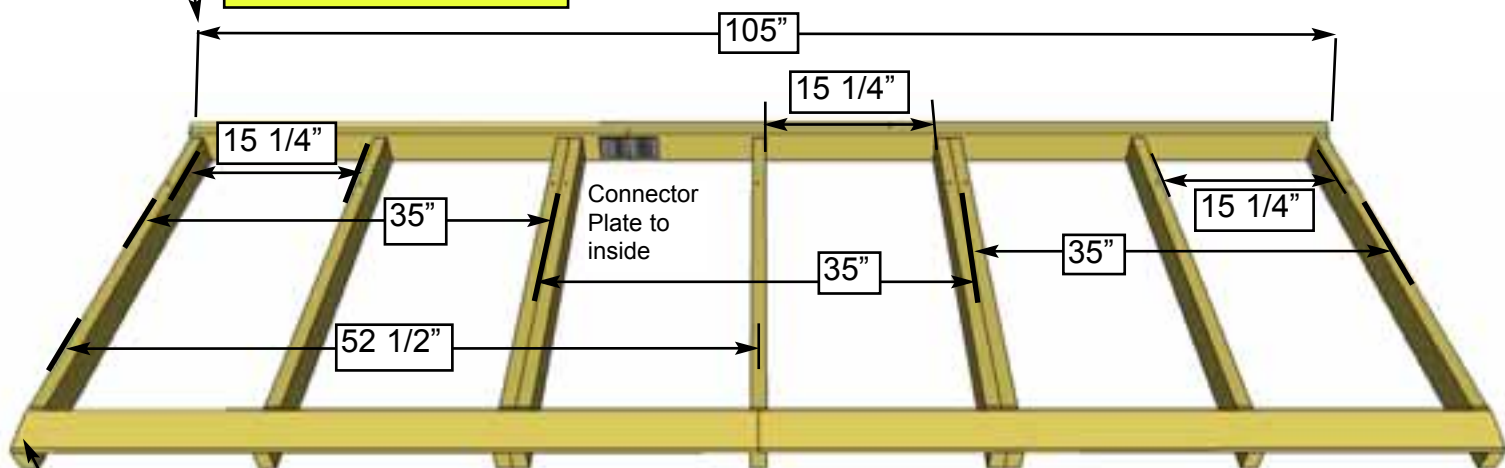


Important: Pilot Hole Soffit to prevent splitting!

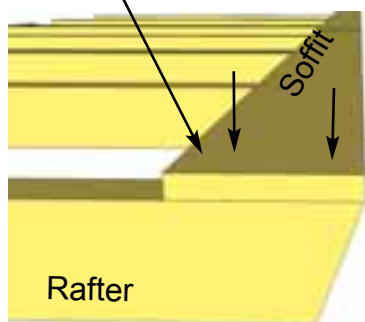


31. Attach end of a 52 1/2" long Soffit Board flush to ends of outside rafters with **2 - 1 1/4" screws** per rafter end. Drill pilot hole in Soffit ends to prevent splitting. Complete both outside rafter / Soffit connections first. Measure and position interior Rafters as illustrated above. When positioned correctly, attach Soffits to remaining rafters with **2 - 1 1/4" screws** /rafter. Flip completed rafter section over. Complete 2nd Rafter section now as per Steps 29 - 31 with the following exception: **When attaching Ridge Board to Rafter ends, make sure Metal Ridge Board Connector is positioned so offset to first Rafter Section.** See Step 37 for illustration.

Pieces:
 - Soffit
 (1/2" x 4 1/2" x 5 1/2")


Hardware:
 - 20x 1 1/4" Screws

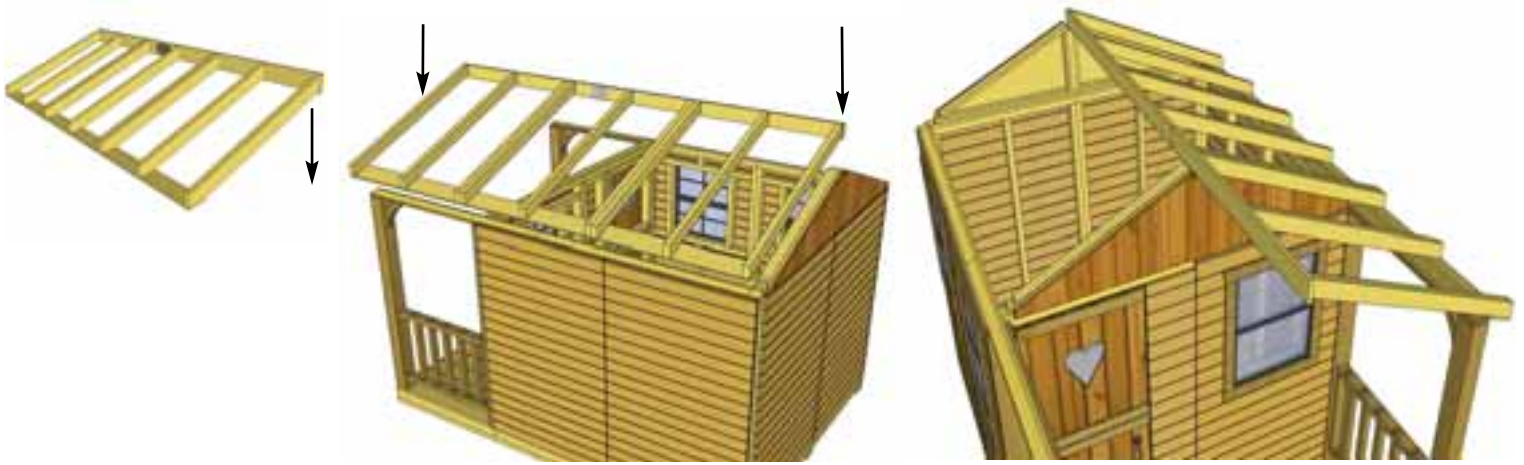


32. Flip Rafter Section over so Soffit is down. Carefully lift completed Rafter Section up and place on middle and rear Gable Framing.

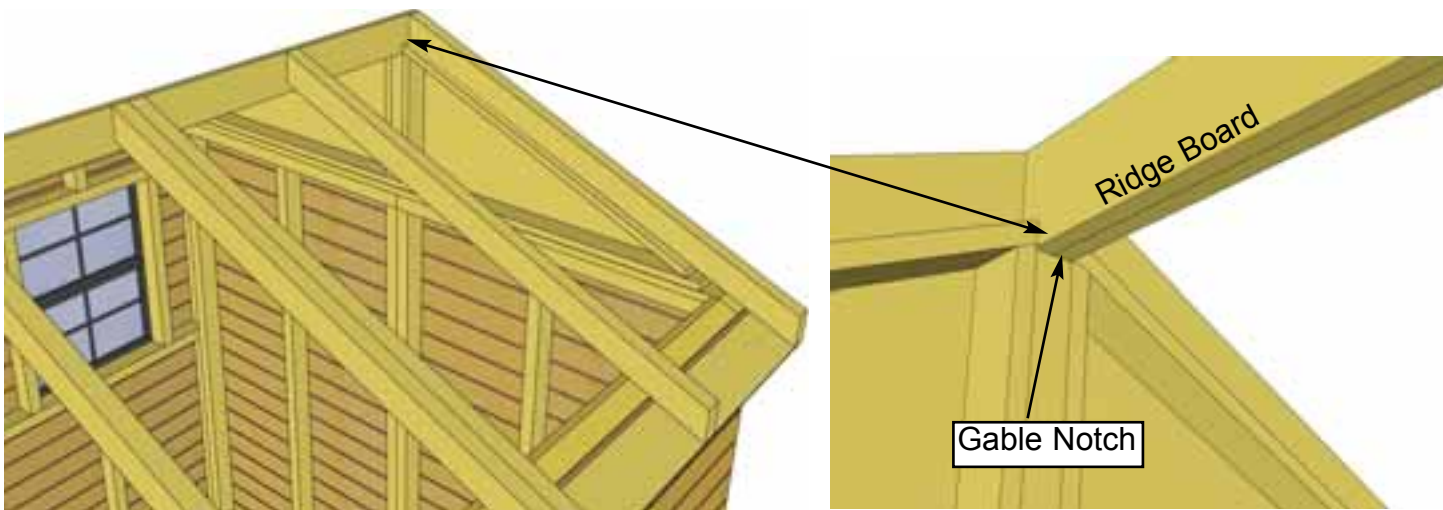

33. Slide Rafter Section up on Gable Framing until bottom of Ridge Board slips into Gable Notch.

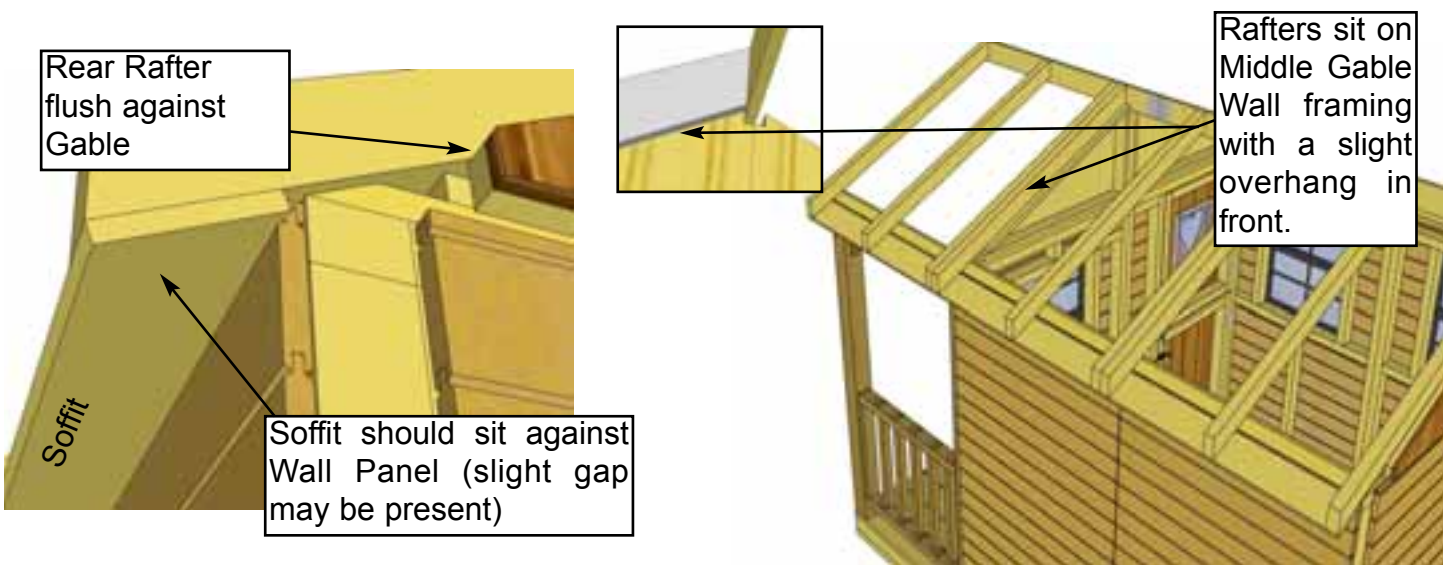


34. Position Rear Rafters flush against Rear Gable. On the Middle Gable, Rafter will slightly overhang siding of Middle Gable Wall.

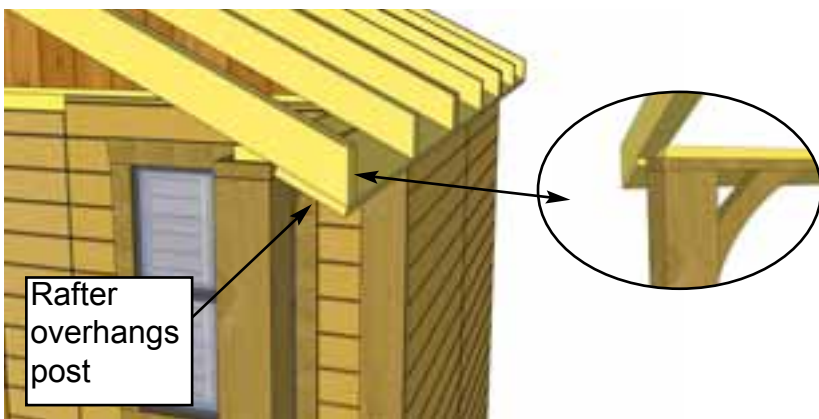


35. Rafter will overhang Porch Post when correctly positioned on walls.



36. Place second completed Rafter Section on Gable Walls and position as per Steps 32 - 34.

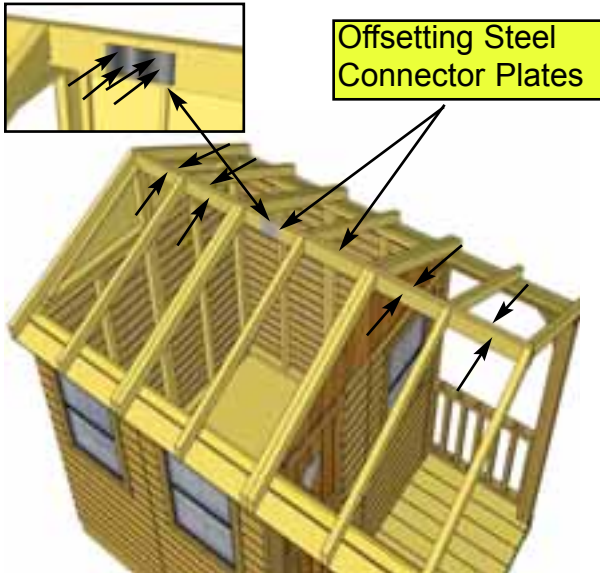

To aid in securing Ridge Boards, place **4 - 1 1/4" screws** into any of the remaining Metal Ridge Board Connector holes. Complete both sides.

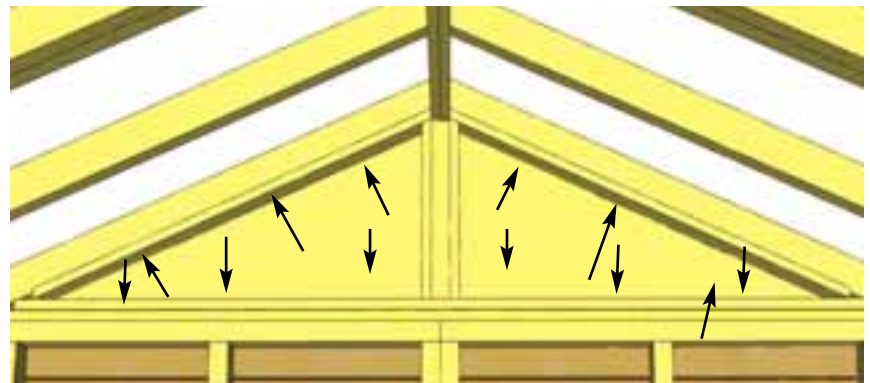


37. At the peak, align Ridge Boards so they are flush together and secure them with **12 - 1 1/4" screws**. **IMPORTANT:** If there is a gap between Ridge Boards, try pushing Side Walls closer together from outside. Walls should be 70" apart at top from inside of Wall Plate to Wall Plate.

Hardware:
- 12x 1 1/4" Screws


38. With both Rafter Ridge Boards connected, secure Gable Framing to both Outside Rafters and Top Wall Plates with **12 - 2" screws**.

Hardware:
- 12x 2" Screws

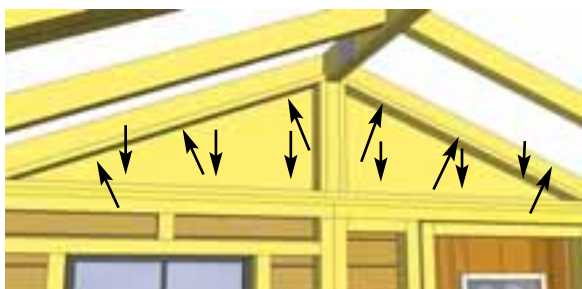


39. Secure Rafters to Middle Gable Wall framing and Top Wall Plates with **12 - 2" screws**.

Hardware:
- 12x 2 1/2" Screws

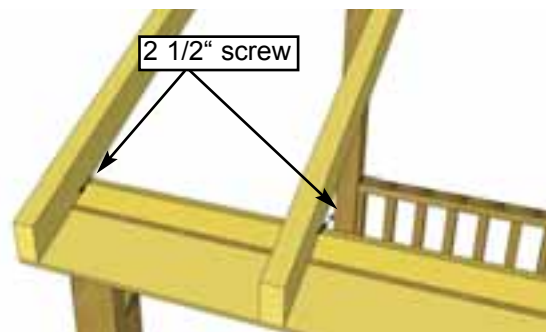

40. Attach Rafters in porch area into Top Plate of porch with **1 - 2 1/2" screw per Rafter**. Once again, measure 70" from inside of wall plate to wall plate for correct Rafter alignment prior to attaching. **Drill pilot holes in rafters on angle first to prevent splitting and then screw down.**

Hardware:
- 18x 2 1/2" Screws

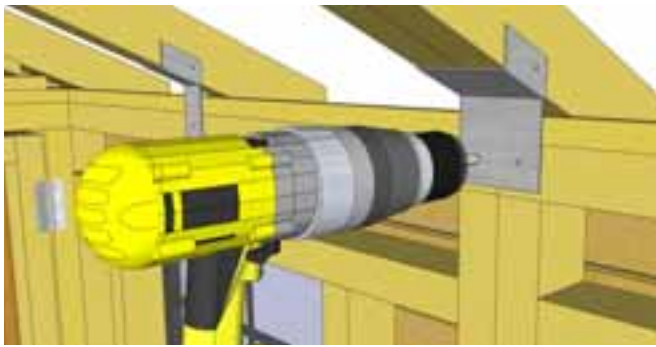


41. Attach all **Single and Double Rafter Brackets** where rafters meet Top Wall Plates inside of shed. Attach with **2 - 1 1/4" screws** and **2 - 2" screws** per Single Rafter Bracket and **6 - 2" screws** per Double Rafter Bracket. Prior to attaching, make sure walls are properly aligned. Have two helpers push the side walls at the top from the outside of shed until inside to inside measurement between side plates is 70".

Hardware:

- 4x Single Rafter Brackets
- 2x Double Rafter Brackets
- 20x 2" Screws
- 20x 1 1/4" Screws

Shingles overhang plywood on outside panels


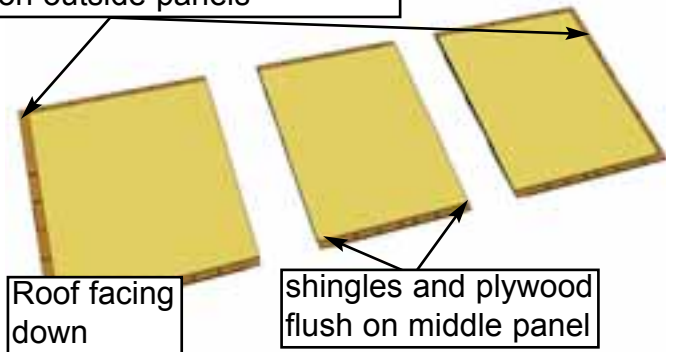


42. Identify all **Roof Panels**. There are four **Outside** and two **Middle Roof Panels**. Outside Panels will have shingles overhanging the plywood on one end.

Pieces:

- 4x Outside Roof Panels (41")
- 2x Middle Roof Panels (35")

43. Lift up and place an Outside Roof Panel on Rafters. End of plywood on roof should be flush with end of rafter. Line up roof edge on seam of double rafter.

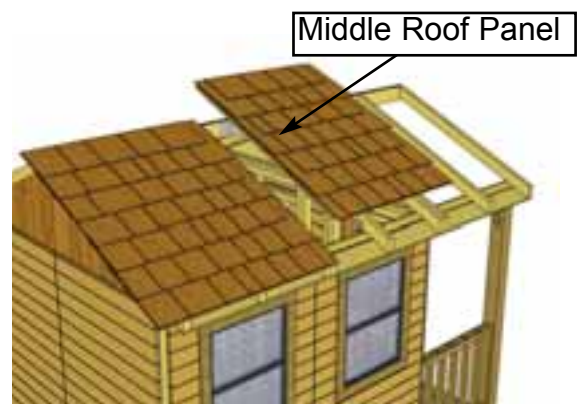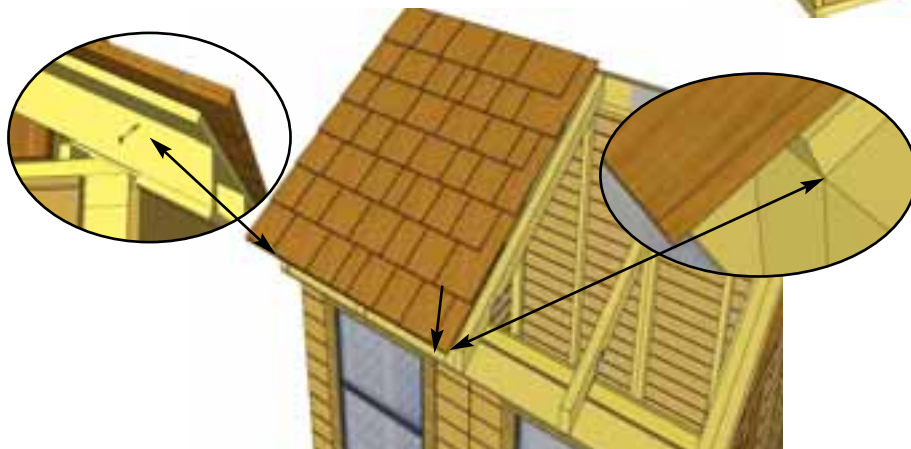

44. Place **Outside Roof Panel** so it sits flush on 3rd rafter from the outside (doubled up rafter). Plywood on roof should be flush with end of rafter at bottom. From the outside, screw down through bottom row of shingles into rafter with **1 - 2 1/2" screw**. Angle a **2 1/2" screw** from outside rafter into roof plywood. Locate **Middle Roof Panel** and position on Rafters.

Pieces:

- Outside Roof Panel
- Middle Roof Panel

Hardware:

- 1x 2 1/2" Screws





45. To confirm, **Middle Roof Panel** will have roof plywood flush with outside of shingles. Place on Middle Rafters and align panel as per **Step 44**. Screw panel down to rafters with 2 - 2 1/2" screws in the bottom row of shingles.

Hardware:
- 2x 2 1/2 " Screws



46. Lift up, position and attach **Front Outside Roof Panel** on Rafters as per **Step 42- 44**. Continue and place opposite **Rear Outside Roof Panel** on Rafters.

Pieces: **Hardware:**
- Outside Roof Panel - 1x 2 1/2" Screws

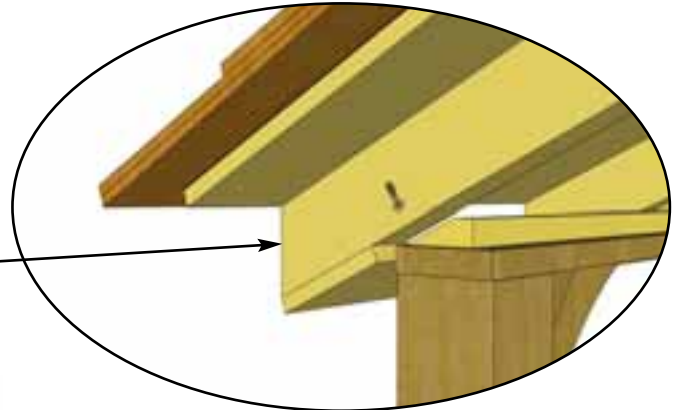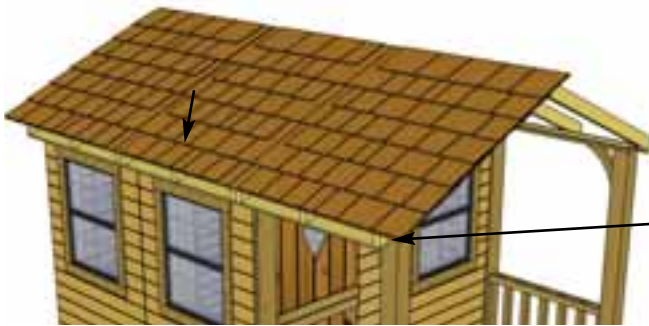

47. Position and attach all remaining Roof Panels as per **Steps 42 - 46**.





48. Roof Filler Shingles are included to cover roof seams. Starting at the bottom, slide the first Long Filler Shingle in until flush with other bottom shingles. See step 49 for proper attachment.

Pieces:

- 12x long Filler Shingles
- 4x Short Filler Shingles



49. Screw first filler shingle down to rafters using **1 - 2 1/2" screw per panel** (2 in total). Make sure to screw into both rafters.

Hardware:

- 2x 2 1/2" Screws



50. Slide in another Filler Shingle and attach as per Step 49. On your last row of shingles, the filler shingle is precut to fit properly. Attach to roof with **2 finishing nails per shingle**.


Hardware:


- 8x 1 1/2" Finishing Nails

51. Position Simpson Strong ties on plywood and outside rafters of back gable and secure with **4 - 1 1/4" screws**. There are **4 ties in total**.

Hardware:

- 4x Simpson Strong Ties
- 16x 1 1/4" Screws

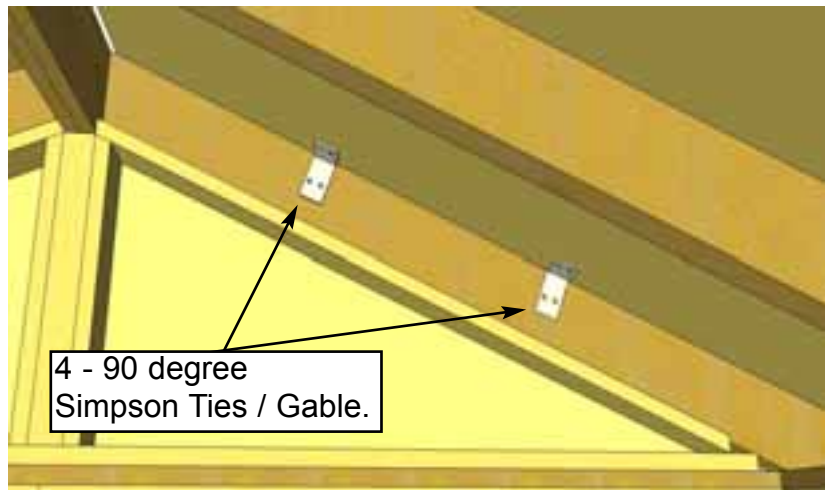

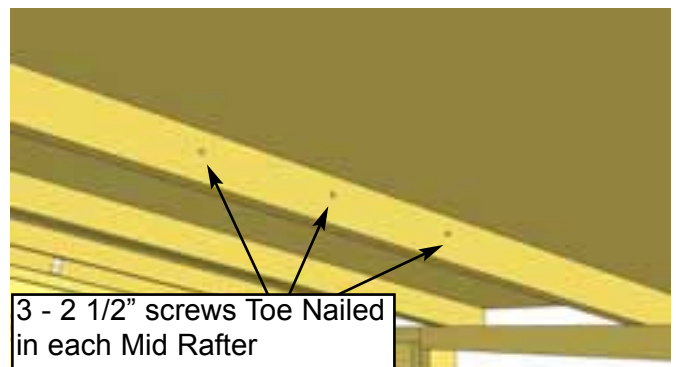

52. To further secure roof panels, from the inside, drill pilot holes in each Mid Rafter (3 per Rafter) on an angle. Using 3 - 2 1/2" screws, secure rafters to roof plywood. **Note:** from outside, have a helper push roof panel down so plywood sits flush against rafter when securing. In Porch area, angle screw both the **mid and outside rafters**.

Hardware:

- 54x 2 1/2" Screws



53. Position **Porch Veneer** with best face exposed, flush with front Rafter and Ridge Board. When correctly in place, nail veneer to rafters with 12 1 1/2" finishing nails. Complete both sides.

Pieces:

- 2x Porch Veneer
(34 1/2" x 37" 1/8")

Hardware:

- 24x 1 1/2" Finishing Nails




54. Attaching the **Decorative Front Gable** is next. Place the Decorative Front Gable underneath porch roof, tight against roof rafter. Be sure to center gable evenly from side to side and place tight up to roof plywood.

Pieces:

- 1x Decorative Front Gable

55. With Decorative Gable correctly positioned, fasten to rafters with 4 - 2" screws (2 per side). Drill 1/8" pilot holes first to avoid splitting the decorative shingles.


<u>Pieces:</u>	<u>Hardware:</u>
- 1x Decorative Front Gable	- 4x 2" Screws

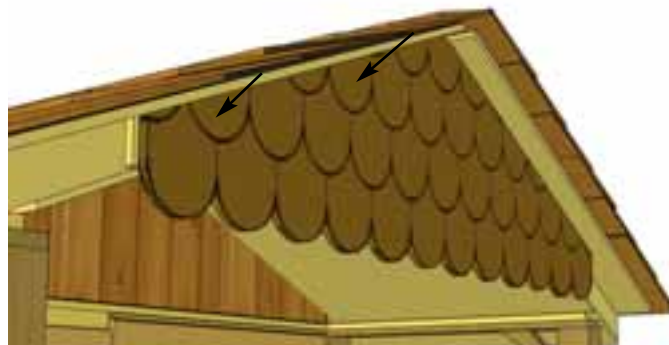


D. Porch Section

56. To complete your porch, attach **Front Porch Rail Section** to **Short Deck Post** and position on Deck. Screw completed Front Porch Section to Porch Post with 3 - 2" screws. Use Rail Support Block (See Step 58.) to determine correct rail height.

<u>Pieces:</u>	<u>Hardware:</u>
- 1x Short Deck Posts (30" x 22")	- 3x 2" Screws

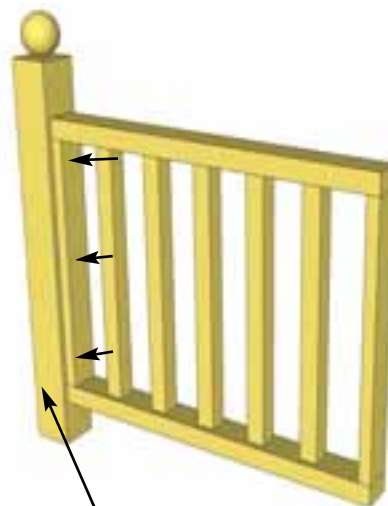





Use Rail Support Block (3 1/2" high) from bottom of post to align rail. Attach rail to post with 3 - 2" screws.

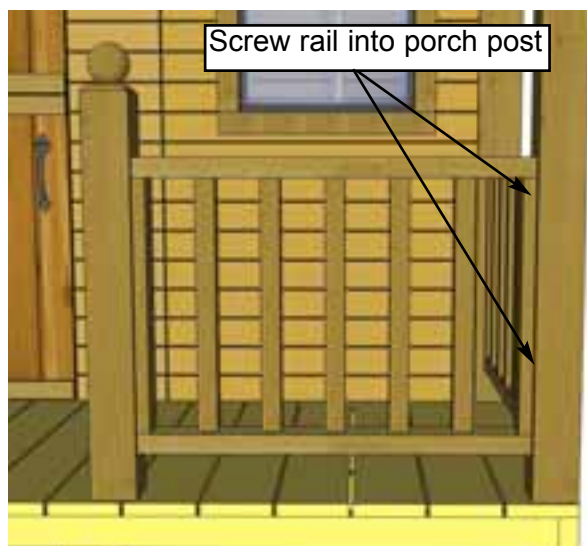

57. Toe-nail or angle screw all Porch Posts to floor with 3 - 2 1/2" screws per post. Drill pilot holes to avoid splitting posts. Position Screws so Post Base Trims in Step 58 will cover. Confirm Porch Post alignment as per Step 25 prior to attaching.

<u>Hardware:</u>
- 9x 2 1/2" Screws

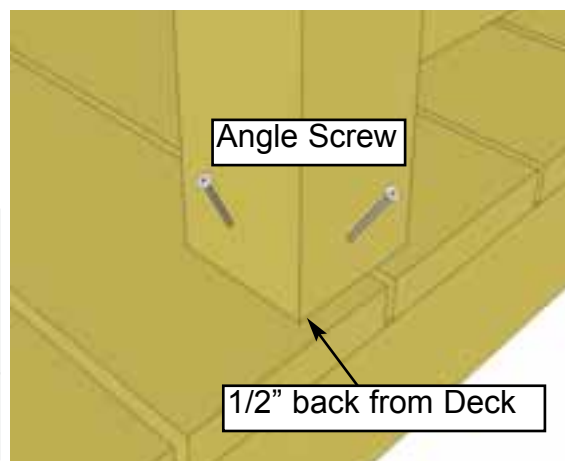

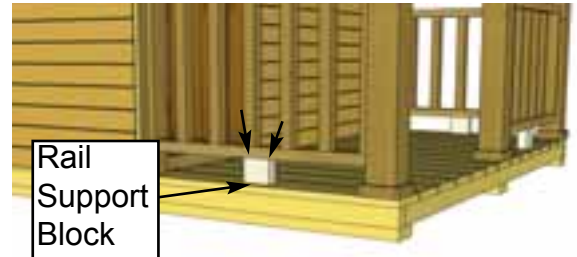

58. Attach **Post Base Trims** to bottom of Porch Posts. Attach with 1 1/2" finishing nails. Center a **Rail Support Block** (1 1/2" x 3 1/2" x 3 1/2") under each Handrail Section and secure from top down with 2 - 2 1/2" screws. Complete each Handrail Section.


Pieces:


- 12x Post Base Trim
(1/2" x 1 1/2" x 4")
- 3x Rail Support Block
(1 1/2" x 3 1/2" x 3 1/2")

Hardware:

- 8x 1 1/2" Finishing Nails
- 6x 2 1/2" Screws

E. Miscellaneous Section

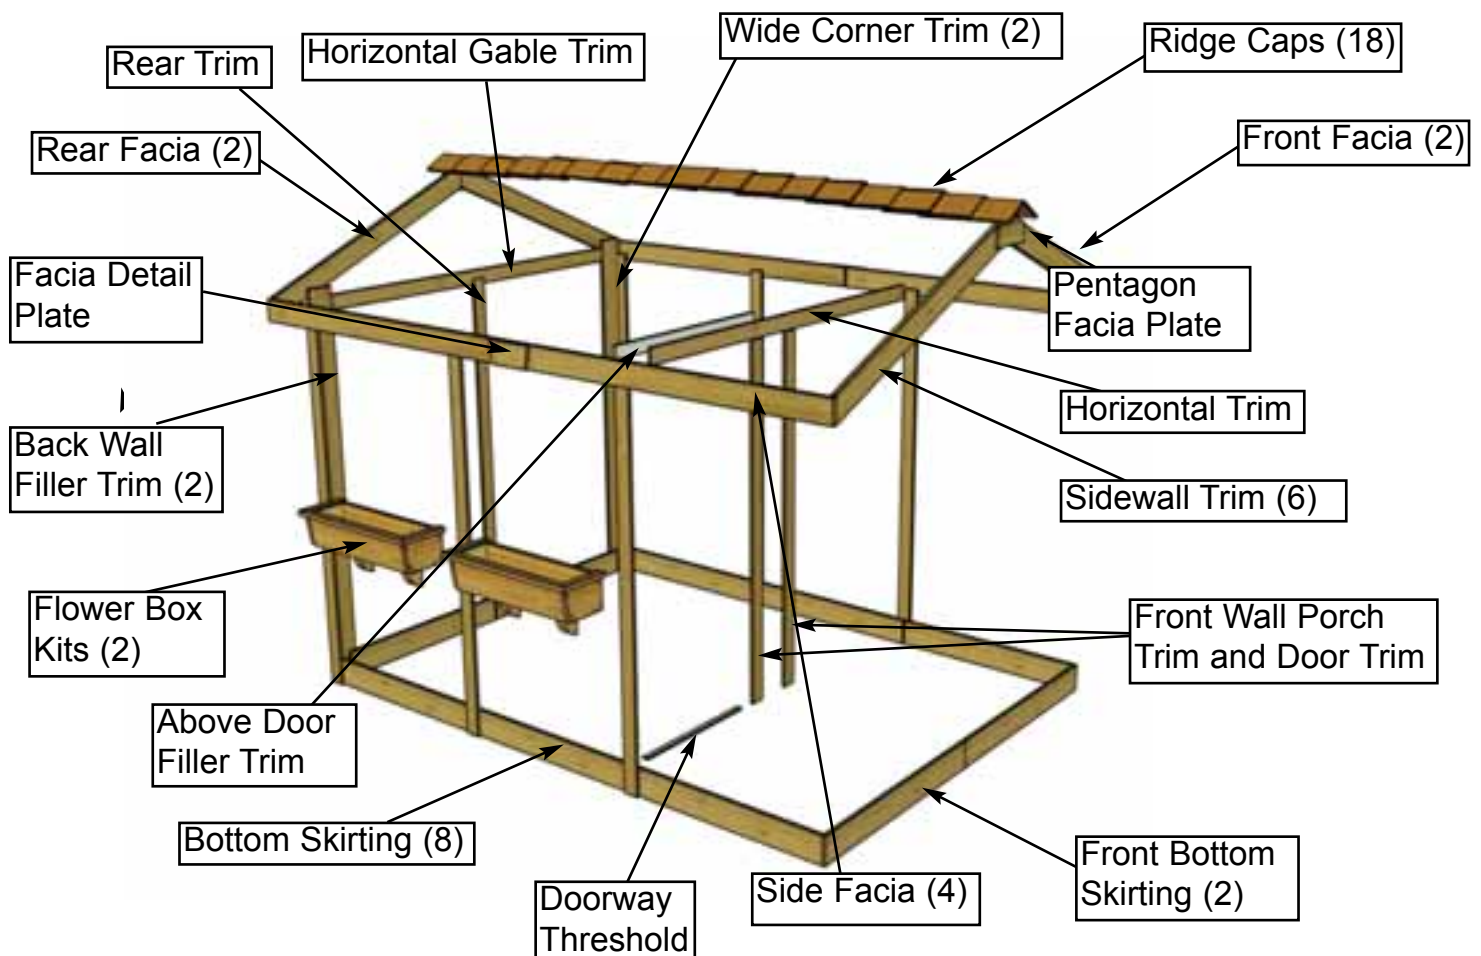

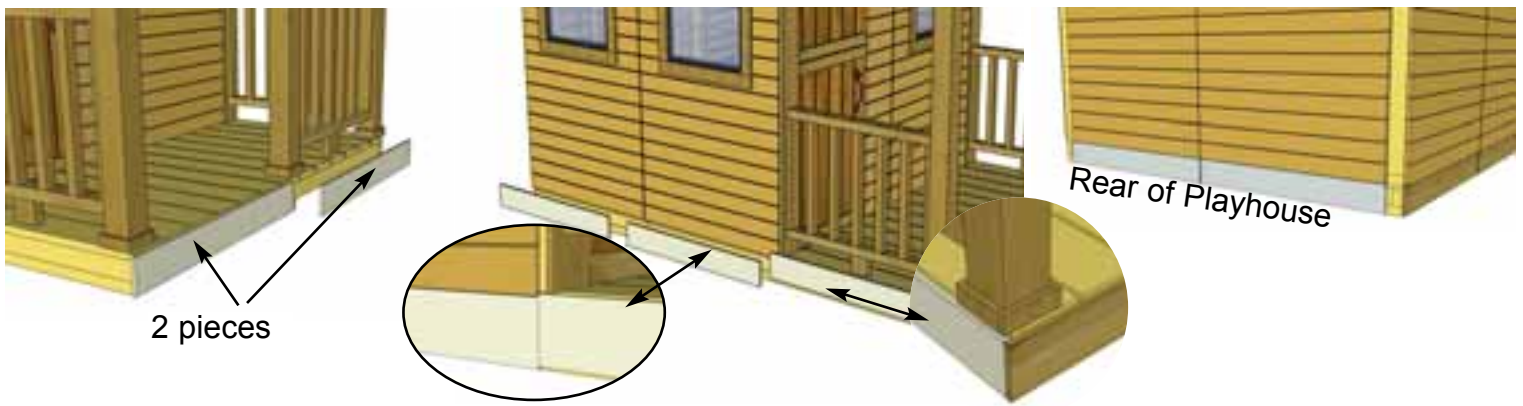

59. Attach **Bottom Skirting** around the base of the playhouse. There are two Front Skirting pieces that are 38" long that will overlap the Side Skirting. There are eight remaining Bottom Skirting pieces that are 35" long. Attach with 4 - 1 1/2" finishing nails per piece. Gaps will appear in the rear corners but will be covered by trim later.

Pieces:

- 2x Front Bottom Skirting
(1/2" x 4 1/2" x 38)

Hardware:

- 8x 1 1/2" Finishing Nails



59a. Check the wall seams for visible gaps prior to attaching filler trim and apply caulk where needed. Caulking gaps will help prevent moisture from entering and will help the longevity of your shed. **Caulking not included in kit.**



60. Attach two 5/8" x 2 1/2" x 60" **Back Wall Filler Trims** to back wall corners. Hammer with 6 - 1 1/2" finishing nails. Flush trim with skirting and siding.

Pieces:

- 2x Back Wall Filler Trim
(5/8" x 2 1/2" x 60)

Hardware:

- 12x 1 1/2" Finishing Nails

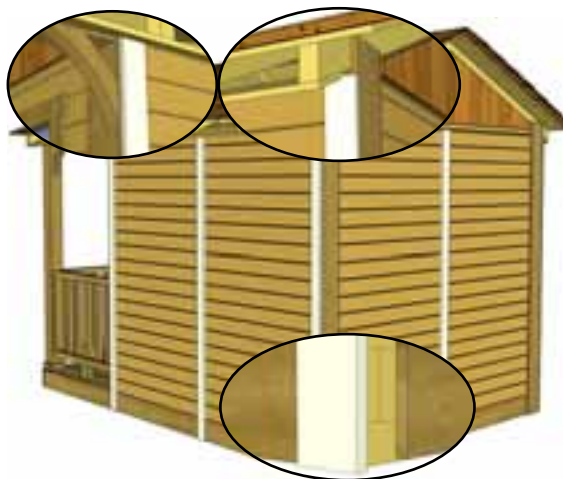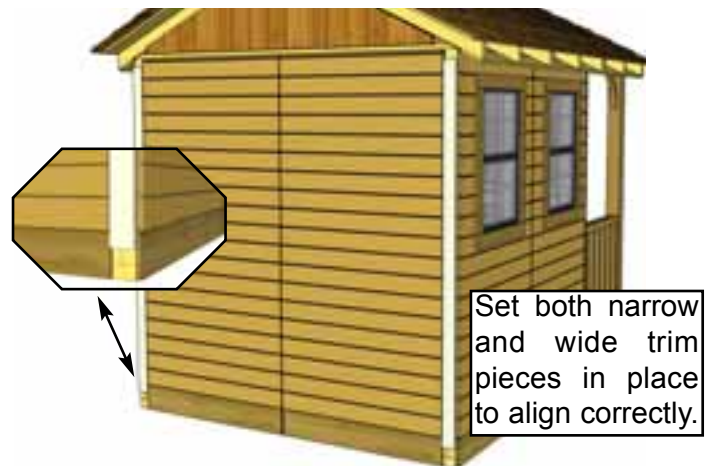


61. Align and attach both **Rear and Sidewall Trims** (7 @ 1/2" x 2 1/2" x 64") on each wall seam and in each corner. Position tight underneath Soffit and Rafter. Narrow Trims will cap Wide Corner Trims in Rear and side of Porch. See **Step 62** for detail. Use 6 - 1 1/2" finishing nails to secure each piece. Note that Narrow Trim will sit slightly below Bottom Skirting when correctly attached. Do a dry run with both Narrow and Wide Trims prior to attaching to confirm positioning.

Pieces:

- 7x Rear & Sidewall Trim
(1/2" x 2 1/2" x 64)

Hardware:

- 42x 1 1/2" Finishing Nails

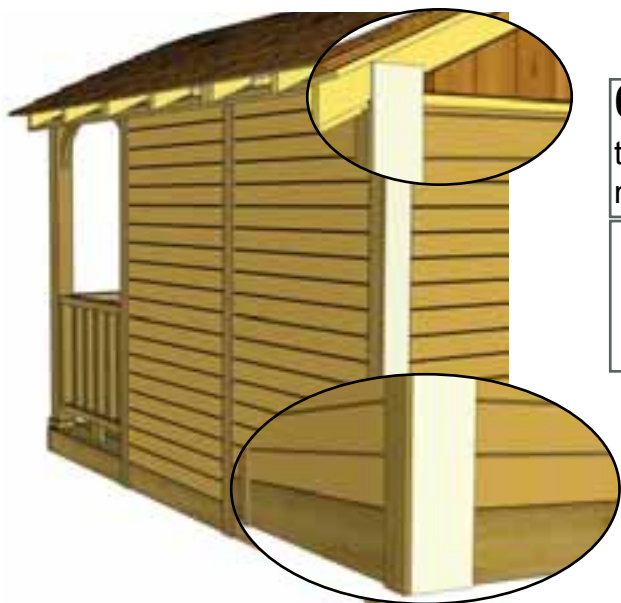

62. Attach **Back Wall Wide Corner Trims** (4 1/2" wide) tight to Narrow Trim and flush at bottom. Use 6 - 1 1/2" finishing nails to secure. Complete both sides.

Pieces:	(1/2" x 4 1/2" x 67)
- 2x Back Wall Wide Corner Trim	Hardware:
	- 12x 1 1/2" Finishing Nails

63. Attach **Horizontal Gable Trim** under Rear Gable (2 1/2" wide) Use Back Wall Wide Corner Trims to confirm positioning. Using 8 - 1 1/2" finishing nails to secure.


Pieces:	Hardware:
- 1x Horizontal Gable Trim (1/2" x 2 1/2" x 67)	- 8x 1 1/2" Finishing Nails



NOTE: Test corners with the finished back trim before securing with Finishing Nails

64. Attach **Facia/Roof Nailing Strips** to the underside edge of the plywood roof. Center and attach with 3 - 1 1/4" screws. Complete all four sides. Attach **Front and Rear Facia** (angle cut on ends) to end of roof panel plywood and nailing strip with 5 - 1 1/2" finishing nails per piece. Line up Rear Facia evenly with Rafter ends. Use Side Facia to confirm positioning.

Pieces:	Hardware:
- 4x Facia/Roof Nailing Strips (3/4" x 2 1/2" x 36")	- 18x 1 1/4" Screws
- 4x Front And Rear Facia (3/4" x 3 1/2" x 46")	- 20x 1 1/2" Finishing Nails







65. Attach **Side Facia** to Roof Rafter Ends. There are two Side Facia pieces per side. Secure with 8 - 1 1/2" finishing Nails per piece.

Pieces:


- 4x Side Facia
(3/4" x 3 1/2" x 57")

Hardware:

- 32x 1 1/2" Finishing Nails

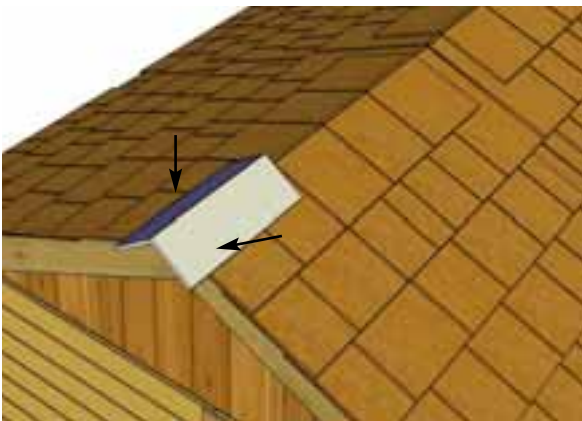

Important - Butt (thick) end of Ridge Cap will be facing towards the outside of shed.

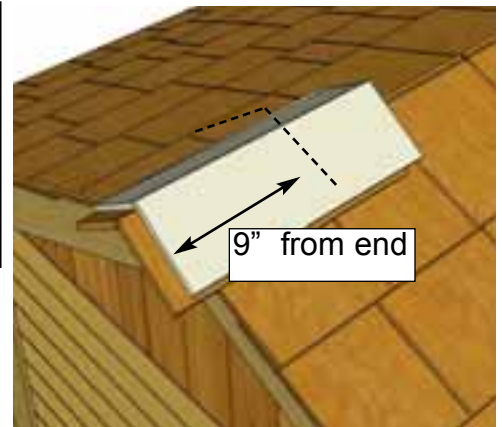



66. Place First Roof Ridge Cap on roof peak overhanging shingles by approximately 2". Attach with 2 - 1 1/2" Shingle Nails 9" from end. Place 2nd Ridge Cap 1" back from 1st cap. Attach with 2 - 1 1/2" Shingle Nails 9" from end.

Pieces:


- 18x Roof Ridge Cap

Hardware:


- 4x 1 1/2" Shingle Nails

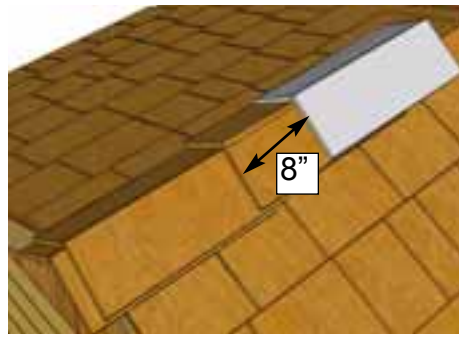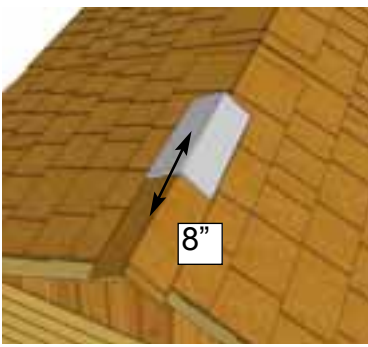

67. Place 3rd Ridge Cap 8" back from 2nd (enough to cover shingle nails). Attach 3rd Ridge Cap down as per **Step 66**. Continue to position and attach Ridge Caps until half the roof is complete. From opposite side, position and attach Ridge Caps as described above. Score/cut 1 Ridge Cap to 12" or to fit in the center of roof. Attach center cap with 4 - 1 1/2" Shingle Nails.

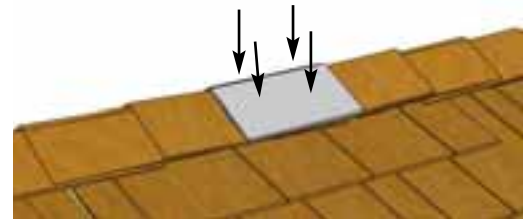


Pieces: - 1x Center Cap	Hardware: - 36x 1 1/2" Shingle Nails
-----------------------------------	--

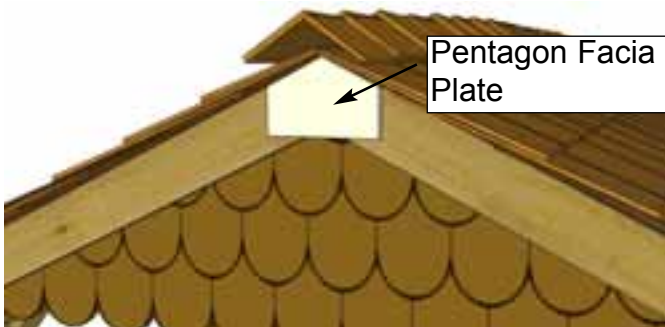

68. Attach **Pentagon Facia Plate** to Rear and Front Facia with 4 - 1 1/2" finishing nails. Facia Plate will cover any gaps existing where Facia's come together at peak. Attach **Facia Detail Plates** (2) where Side Trims meet. Use 4 - 1 1/2" finishing nails to secure.

Pieces: - 2x Pentagon Faica Plates - 2x Facia Detail Plates	Hardware: - 16x 1 1/2" Finishing Nails
--	--


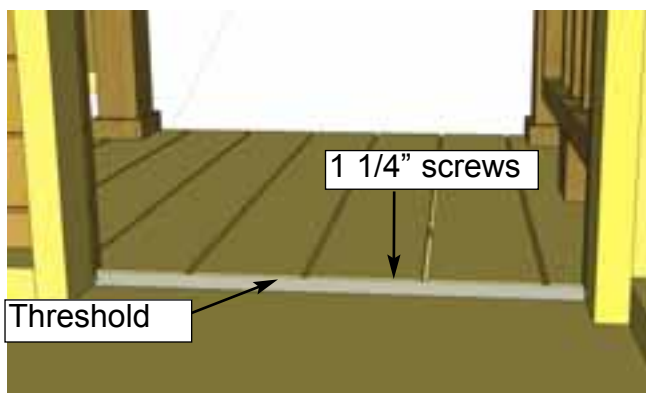


69. Also included is an optional **Doorway Threshold** piece that is 23" long and angle cut. Attach where Plywood Floor and Decking meet under the door with 3 - 1 1/4" screws.

Pieces: - 1x Doorway Threshold (1 1/4" x 1/4" x 23")	Hardware: - 3x 1 1/4 Screws
---	---------------------------------------

70. Assemble **Flower Box Kit**. Assembly Instructions are found on **Page 32**. Position completed Flower Box below bottom of window trim and secure with **2 - 2" screws** per box. Screw from inside of box into the center wall stud. Attach second screw 2" underneath first screw and once again into the wall stud. Install Flower Box Kits underneath each window.

<u>Pieces:</u>	<u>Hardware:</u>
- 2x Flower Box Kit	- 2x 2" Screws

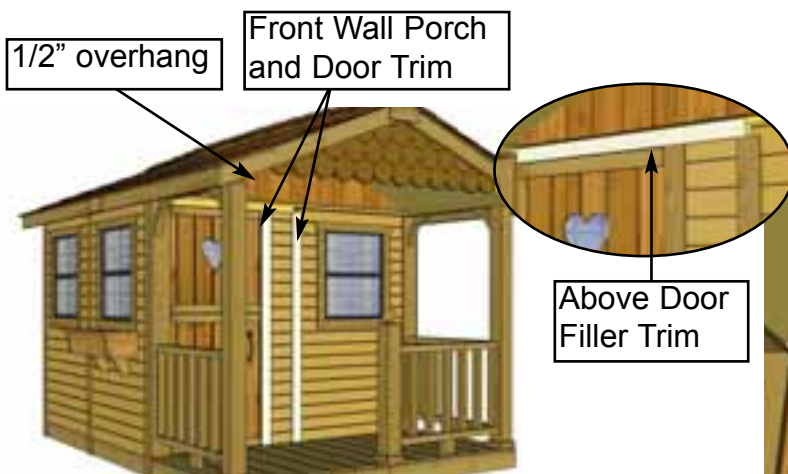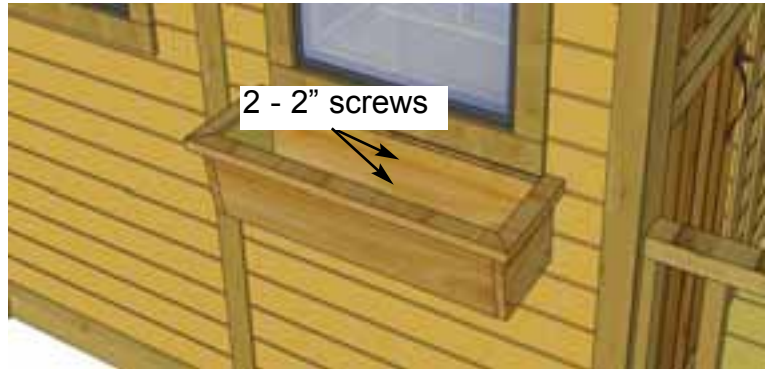

71 Finally, to finish your Playhouse, attach the **Above Door Filler Trim**, **Front Wall Porch Trim** and **Door Trim** (58" long vertically). Attach Filler Trim to Door Header with **3 - 1 1/2" nails**. The Front Wall Porch Trim will cover wall seam. The Door Trim will overhang doorway by 1/2" and also act as a door stop. Attach both with **6 - 1 1/2" finishing nails** per piece. Finally, attach the Horizontal Trim (67" long) above the Door and window flush to the top of the Porch Trim. Use **6 - 1 1/2" Finishing Nails** to secure into the Gable.

<u>Pieces:</u>
- 1x Above Door Filler Trim (1/2" x 2" x 33")
-1x Front Wall Porch Trim (1/2" x 2 1/2" x 58")
-Door Trim (1/2" x 2 1/2" x 58")
-1x Horizontal Trim (1/2" x 2 1/2" x 67")



<u>Hardware:</u>
- 21x 1 1/2" Finishing Nails

Outdoor Living Today


Flower Box Assembly Instructions

Parts Lists:



A - Base, Rear & Front Box Frames (3pcs)	3/4" x 5 1/2" x 23"
B - End Cap Frames (2pcs)	3/4" x 5 1/2" x 7" / 8"
C - Front Trim (1 pc)	3/4" x 1 1/2" x 26"
D - Side Trims (2 pc)	3/4" x 1 1/2" x 8 3/4"
E - Brackets (2 pc)	1 1/2" x 5 1/2" x 5 1/2"
F - 1 1/4" Screws (15 pc)	
G - 1 1/2" Nails (10 pc)	

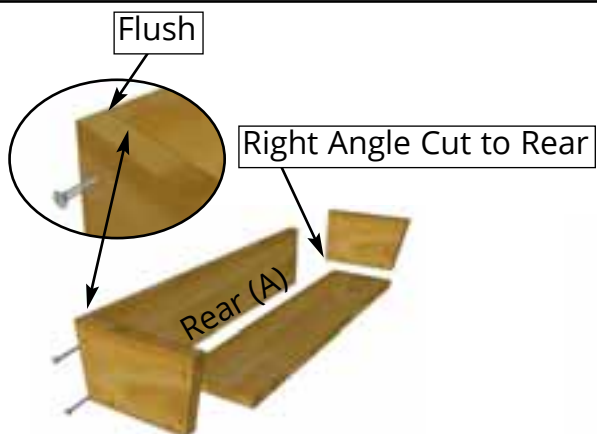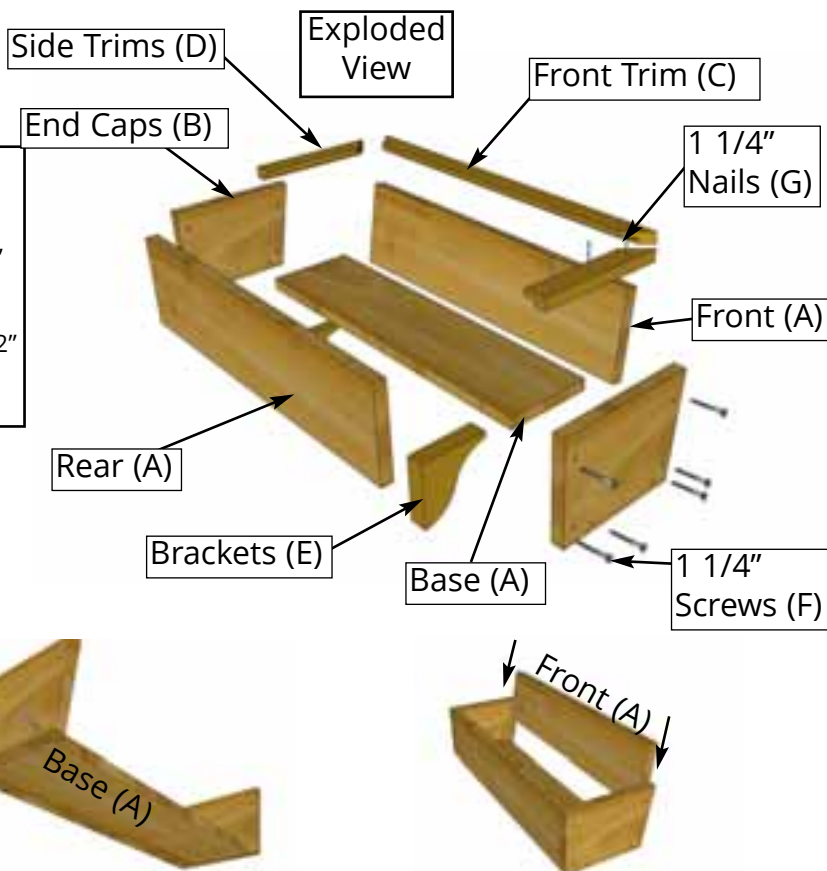

1. On a table position Rear Box and End Cap Frames together so flush at top. Fasten together with 2 - 1 1/4" screws. Place Base Frame tight against Rear and End Cap and flush at bottom. Secure with 2 - 1 1/4" screws. Complete attachment of remaining End Cap Frame. Slide Front Frame between End Caps.

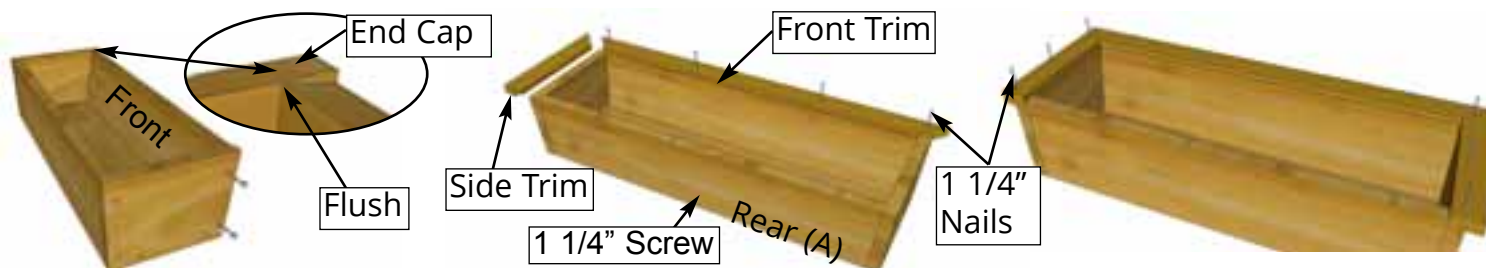

2. Position Front Frame Piece flush with End Cap. Attach both ends with 2 - 1 1/4" screws. Pilot hole Rear Box Frame near bottom center and secure to Base edge with 1 - 1 1/4" screw. Evenly position Front Trim (mitre cut on end and dado cut on inside bottom) tight against front frame and nail down with 4 - 1 1/4" nails. Position Side Trims as per Front and secure with 3 - 1 1/4" nails per side.

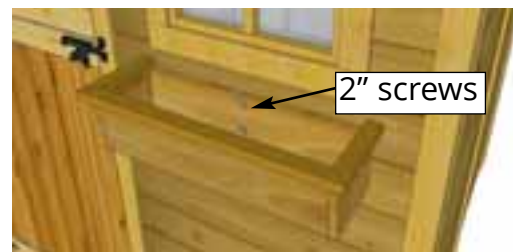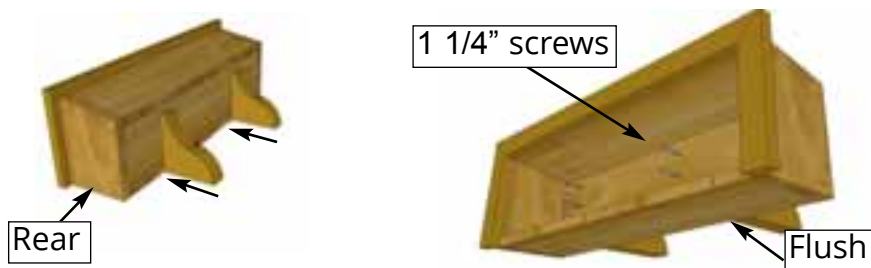

3. On a flat surface, flip Flower Box on it's rear face. Evenly space Brackets and secure through Base Frame and into the Brackets with 2 - 1 1/4" screws per Bracket. Position completed Flower Box beneath window trim and screw from inside of box into the center wall stud with 2 - 2" screws. (2" screws supplied with Base Kit.)



Outdoor Living Today

Congratulations on assembling your 6x9 Sunflower Playhouse!



NOTE: Our Playhouses are shipped as an unfinished product. If exposed to the elements, the Western Red Cedar lumber will weather to a silvery-gray color. If you prefer to keep the cedar lumber looking closer to the original color, we suggest that you treat the wood with a good oil base wood stain. You may also wish to paint your new shed rather than stain it. In both cases, we recommend that you consult with a paint and stain dealer in your area for their recommendations. Do not paint / stain the cedar shingles, this will void the warranty.

We hope your experience constructing our **6x9 Sunflower Playhouse** has been both positive and rewarding. We value your feedback and would like to hear back from you on how well we are doing in the following areas:

1. **Customer Service**
2. **On Time Shipping**
3. **Motor Freight Delivery**
4. **Quality of Materials**
5. **Assembly Manual**
6. **Overall Satisfaction**



The materials contained in this Assembly Manual may be downloaded or copied provided that ALL copies retain the copyright and any other proprietary notices contained on the materials. No material may be modified, edited or taken out of context such that its use creates a false or misleading statement or impression as to the positions, statements or actions.

Please call, write or email us at:

Canadian Address
9393 287th Street
Maple Ridge, British Columbia
Canada V2W 1L1

United States Address
P.O. Box 96
Sumas, Washington
USA 98295

Toll Line: 1.888.658.1658

Fax: 1.604.462.5333

sales@outdoorlivingtoday.com

Toll Free 1-888-658-1658

www.outdoorlivingtoday.com

sales@outdoorlivingtoday.com